HITACHI

SR-903
SR-803
SR-703

SERVICE MANUAL

English
Deutsch
Français

No. 114

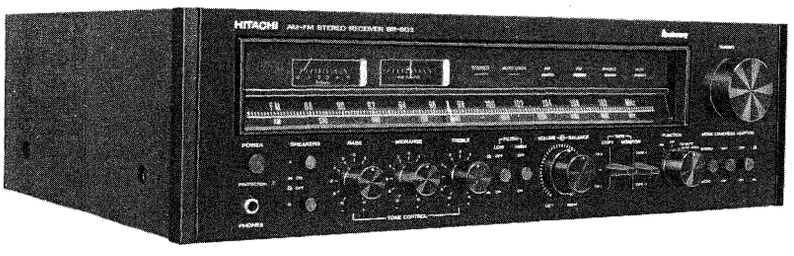

SR-903 (Black type)

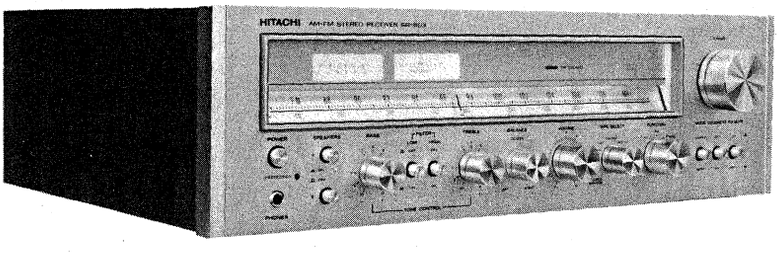

SR-803 (Gold type)

SR-703 (Gold type)

STEREO RECEIVER

JULY 1977

SPECIFICATIONS

	SR-903	SR-803	SR-703
FM SECTION			
Frequency range	88 – 108MHz	88 – 108MHz	88 – 108MHz
Usable sensitivity	1.2μV (DIN), 1.6μV(IHF)	1.5μV (DIN), 1.7μV (IHF)	1.6μV (DIN), 1.8μV (IHF)
Signal-to-noise ratio	Mono : 74dB Stereo : 68dB	Mono : 74dB Stereo : 68dB	Mono : 74dB Stereo : 68dB
Harmonic distortion 100Hz	Mono : 0.2% Stereo : 0.3%	Mono : 0.2% Stereo : 0.3%	Mono : 0.3% Stereo : 0.4%
1 kHz	Mono : 0.15% Stereo : 0.25%	Mono : 0.15% Stereo : 0.25%	Mono : 0.2% Stereo : 0.3%
6 kHz	Mono : 0.25% Stereo : 0.3%	Mono : 0.25% Stereo : 0.3%	Mono : 0.3% Stereo : 0.3%
Frequency response	30Hz – 15kHz (± 1dB)	30Hz – 15kHz (± 1dB)	30Hz – 15kHz ($^{+0.2}_{-1.5}$ dB)
Image response ratio	85 dB	85 dB	56 dB
Spurious response ratio	100 dB	100 dB	80 dB
IF response ratio	100 dB	100 dB	90 dB
Alternate channel selectivity	80 dB	80 dB	60 dB
Capture ratio	1 dB	1 dB	1 dB
AM suppression	55 dB	55 dB	55 dB
Stereo separation	45 dB (1 kHz)	45 dB (1 kHz)	40 dB (1 kHz)
Sub-carrier suppression	65 dB	65 dB	——
SCA rejection	65 dB	65 dB	65 dB
Muting threshold	14 μV	14 μV	14 μV
Antenna input	300 ohms balanced, 75 ohms unbalanced	300 ohms balanced, 75 ohms unbalanced	300 ohms balanced, 75 ohms unbalanced
AM SECTION			
Frequency range	530 – 1,605kHz	530 – 1,605kHz	530 – 1,605kHz
Sensitivity	300μV/m (S/N 20dB)	300μV/m (S/N 20dB)	300μV/m (S/N 20dB)
	20μV (IHF, ext. antenna)	20μV (IHF, ext. antenna)	20μV (IHF, ext. antenna)
Image rejection	70 dB	50 dB	50 dB
IF rejection	90 dB	50 dB	50 dB
Selectivity (IHF)	40 dB	35 dB	36 dB
Signal-to-noise ratio	50 dB	50 dB	50 dB
Antenna	Ferrite and separate terminal	Ferrite antenna	Ferrite antenna
AUDIO SECTION			
Output			
RMS power (Both channels driven)	75W/ch + 75W/ch (8 ohms, 20Hs – 20kHz, T.H.D. 0.1%)	50W/ch + 50W/ch (8 ohms, 20Hz – 20kHz, T.H.D. 0.1%)	40W/ch + 40W/ch (8 ohms, 20Hz – 20kHz, T.H.D. 0.3%)
	95W/ch + 95W/ch (8 ohms, 1kHz, T.H.D. 0.1%)	60W/ch + 60W/ch (8 ohms, 1kHz, T.H.D. 0.1%)	55W/ch + 55W/ch (8 ohms, 1kHz, T.H.D. 0.3%)
	105W/ch + 105W/ch (4 ohms, 1kHz, T.H.D. 0.1%)	70W/ch + 70W/ch (4 ohms, 1kHz, T.H.D. 0.1%)	60W/ch + 60W/ch (4 ohms, 1kHz, T.H.D. 0.3%)
Music power (IHF)	160W/ch + 160W/ch (8 ohms)	80W/ch + 80W/ch (8 ohms)	65W/ch + 65W/ch (8 ohms)
Power bandwidth	10Hz – 50kHz	10Hz – 40kHz	10Hz – 30kHz
Frequency characteristics	10Hz – 30kHz (±1dB)	10Hz – 30kHz (±1dB)	10Hz – 30kHz (±1dB)
Harmonic distortion			
(at rated output)	Less than 0.1%	Less than 0.1%	Less than 0.3%
(at ½ rated output)	Less than 0.03%	Less than 0.05%	Less than 0.07%
Intermodulation distortion			
(at rated output)	0.3%	0.4%	Less than 0.5%
(at ½ rated output)	0.03%	0.05%	Less than 0.1%
Input sensitivity			
	(at 80W output, 1kHz)	(at 55W output, 1kHz)	(at 45W output, 1kHz)
PHONO	1.9mV (47 k-ohms)	2.5mV (47 k-ohms)	2.5mV (47 k-ohms)
AUX	150mV (50 k-ohms)	150mV (50 k-ohms)	200mV (50 k-ohms)
TAPE-1	150mV (50 k-ohms)	150mV (50 k-ohms)	200mV (50 k-ohms)
TAPE-2	150mV (50 k-ohms)	150mV (50 k-ohms)	200mV (50 k-ohms)
ADAPTOR	150mV (50 k-ohms)	——	——
DIN	400mV (120 k-ohms)	450mV (120 k-ohms)	450mV (70 k-ohms)
Output level			
TAPE OUT	150mV (PHONO, AUX at rated input)	150mV (PHONO, AUX at rated input)	200mV (PHONO, AUX at rated input)
	200mV (FM 400Hz, 30% dev. input : 1mV)	150mV (FM 400Hz, 30% dev. input : 1mV)	200mV (FM 400Hz,30% dev. input : 1mV)
	150mV (AM 400Hz, 30% mod. input : 5mV/m)	150mV (AM 400Hz, 30% mod. input : 5mV/m)	200mV (AM 400Hz, 30% mod. input : 5mV/m)
DIN OUT	40mV (PHONO at rated input)	40mV (PHONO at rated input)	40mV (PHONO at rated input)
Signal-to-noise ratio (IHF, input shorted, A-network, rated power)			
PHONO	75 dB	70 dB	70 dB
AUX	87 dB	85 dB	80 dB
TAPE	87 dB	85 dB	80 dB
Damping factor	45 (1kHz, 8 ohms)	45 (1kHz, 8 ohms)	30 (1kHz, 8 ohms)
Equalizer	RIAA ±0.5 dB	RIAA ±1 dB	RIAA ±1 dB
Bass control	± 10 dB (100Hz)	± 10 dB (100Hz)	± 10 dB (100Hz)
Midrange control	± 6 dB (1kHz)	——	——

	SR-903	SR-803	SR-703
Treble control	± 10 dB (10kHz) (Volume control set at −30 dB position)	± 10 dB (10kHz)	± 10 dB (10kHz)
Loudness control	+9 dB (100Hz), +4 dB (10kHz)	+9 dB (100Hz), +4 dB (10kHz)	+9 dB (100Hz), +4 dB (10kHz)
High filter	−8 dB at 10kHz	−8 dB at 10kHz	−5 dB at 10kHz
Low filter	−8 dB at 50Hz	−8 dB at 50Hz	———
Semi-conductors	5 ICs, 1 FET, 57 transistors, 62 diodes and 1 thyristor	1 FET, 6 ICs, 34 transistors, 42 diodes and 1 thyristor	1 FET, 5 ICs, 24 transistors, 35 diodes and 1 thyristor
Tape monitor	1, 2	1, 2	1, 2
Speaker switch	A, B, A + B	A, B, A + B	A, B, A + B
Tuning meter	2	2	2
Speaker terminal	One-touch terminal	One-touch terminal	One-touch terminal
FM MUTING/AUTO LOCK	Provided	———	———
Power supply	100/120/220/240V ~ 50/60Hz	100/120/220/240V ~ 50/60Hz	100/120/220/240V ~ 50/60Hz
Power consumption	615W (4 ohms), 430W (8 ohms)	370W	320W
Dimensions	490(W) x 144(H) x 400(D)mm	490(W) x 144(H) x 400(D)mm	489 (W)x 143(H) x 400(D)mm
Weight	13.5 kg (29.8 lbs.)	13 kg (28.6 lbs.)	11.5 kg (25.4 lbs.)

Specifications and designs may be changed without notice for improvement.

TECHNISCHE DATEN

	SR-903	SR-803	SR-703
UKW-TEIL			
Welenbereich	88 – 108MHz	88 – 108MHz	88 – 108MHz
Empfindlichkeit	1,2µV (DIN), 1,6µV (IHF)	1,5µV (DIN), 1,7µV (IHF)	1,6µV (DIN), 1,8µV (IHF)
Gerauschspannungsabstand	Mono : 74dB Stereo : 68dB	Mono : 74dB Stereo : 68dB	Mono : 74dB Stereo : 68dB
Klirrfaktor 100Hz	Mono : 0,2% Stereo : 0,3%	Mono : 0,2% Stereo : 0,3%	Mono : 0,3% Stereo : 0,4%
1 kHz	Mono : 0,15% Stereo : 0,25%	Mono : 0,15% Stereo : 0,25%	Mono : 0,2% Stereo : 0,3%
6 kHz	Mono : 0,25% Stereo : 0,3%	Mono : 0,25% Stereo : 0,3%	Mono : 0,3% Stereo : 0,3%
Frequenzgang	30Hz – 15kHz (±1 dB)	30Hz – 15kHz (±1 dB)	30Hz – 15kHz ($^{+0,2}_{-1,5}$dB)
Spiegelselektion	85 dB	85 dB	56 dB
Nebenwellenunterdrückung	100 dB	100 dB	80 dB
ZF-Dämpfung	100 dB	100 dB	90 dB
Wechselkanaltrennschärfe	80 dB	80 dB	60 dB
Einfangverhältnis	1 dB	1 dB	1 dB
AM-Unterdrückung	55 dB	55 dB	55 dB
Kanaltrennung	45 dB (1 kHz)	45 dB (1 kHz)	40 dB (1 kHz)
Zwischenträgerunterdrückung	65 dB	65 dB	———
SCA-Unterdrückung	65 dB	65 dB	65 dB
Stillabstimmschwelle	14µV	14µV	14µV
Antenneneingang	300 Ohm abgeglichen, 75 Ohm unabgeglichen	300 Ohm abgeglichen, 75 Ohm unabgeglichen	300 Ohm abgeglichen, 75 Ohm unabgeglichen
MW-TEIL			
Wellenbereich	530 – 1.605kHz	530 – 1.605kHz	530 – 1.605kHz
Empfindlichkeit	300µV/m (S/N 20 dB), 20µV (IHF, Außenantenne)	300µV/m ((S/N 20 dB), 20µV (IHF, Außenantenne)	300µV/m (S/N 20 dB), 20µV (IHF, Außenantenne)
Spiegelselektion	70 dB	50 dB	50 dB
ZF-Dämpfung	90 dB	50 dB	50 dB
Selektivität (IHF)	40 dB	35 dB	36 dB
Geräuschspannungsabstand	50 dB	50 dB	50 dB
Antenne	Ferrit und separater Anschluß	Ferritantenne	Ferritantenne
NF-TEIL			
Ausgang Sinusleistung (beide kanäle betrieben)	75W/K. + 75W/K. (8 Ohm, 20Hz – 20kHz, 0,1%) 95W/K. + 95W/K. (8 Ohm, 1kHz, 0,1%) 105W/K. + 105W/K. (4 Ohm, 1kHz, 0,1%)	50W/K. + 50W/K. (8 Ohm, 20Hz – 20kHz, 0,1%) 60W/K. + 60W/K. (8 Ohm, 1kHz, 0,1%) 70W/K. + 70W/K. (4 Ohm, 1kHz, 0,1%)	40W/K. + 40W/K. (8 Ohm, 20Hz – 20kHz, 0,3%) 55W/K. + 55W/K. (8 Ohm, 1kHz, 0,3%) 60W/K. + 60W/K. (4 Ohm, 1kHz, 0,3%)
Musikleistung (IHF)	160W/K. + 160W/K. (8 Ohm)	80W/K. + 80W/K. (8 Ohm)	65W/K. + 65W/K. (8 Ohm)
Ausgangs-Bandbreite	10Hz – 50kHz	10Hz – 40kHz	10Hz – 30kHz
Frequenzumfang	10Hz – 30kHz (±1 dB)	10Hz – 30kHz (±1 dB)	10Hz – 30kHz (±1 dB)
Klirrfaktor			
(bei Nennleistung)	Kleiner als 0,1%	Kleiner als 0,1%	Kleiner als 0,3%
(bei halber Leistung)	Kleiner als 0,03%	Kleiner als 0,05%	Kleiner als 0,07%
Intermodulations-Verzerrung			
(bei Nennleistung)	0,3%	0,4%	Kleiner als 0,5%
(bei halder Leistung)	0,03%	0,05%	Kleiner als 0,1%
Eingangsempfindlichkeit			
PHONO	(bei 80W Ausgangsleistung, 1kHz) 1,9mV (47 kOhm)	(bei 55W Ausgangsleistung, 1kHz) 2,5mV (47 kOhm)	(bei 45W Ausgangsleistung, 1kHz) 2,5mV (47 kOhm)

	SR-903	SR-803	SR-703
AUX	150mV (50 kOhm)	150mV (50 kOhm)	200mV (50 kOhm)
TAPE-1	150mV (50 kOhm)	150mV (50 kOhm)	200mV (50 kOhm)
TAPE-2	150mV (50 kOhm)	150mV (50 kOhm)	200mV (50 kOhm)
ADAPTOR	150mV (50 kOhm)	——	——
DIN	400mV (120 kOhm)	450mV (120 kOhm)	450mV (70 kOhm)
Ausgangspegel			
TAPE OUT	150mV (PHONO, AUX bei Nenneingangsleistung) 200mV (UKW 400Hz, 30% Dev. Eingang : 1mV) 150mV (MW 400Hz, 30% Mod. Eingang : 5mV/m)	150mV (PHONO, AUX bei Nenneingangsleistung) 150mV (UKW 400Hz, 30% Dev. Eingang : 1mV) 150mV (MW 400Hz, 30% Mod. Eingang : 5mV/m)	200mV (PHONO, AUX bei Nenneingangsleistung) 200mV (UKW 400Hz, 30% Dev. Eingang : 1mV) 200mV (MW 400Hz, 30% Mod. Eingang : 5mV/m)
DIN OUT	40mV (PHONO bei Nenneingangsleistung)	40mV (PHONO bei Nenneingangsleistung)	40mV (PHONO bei Nenneingangsleistung)
Geräuschspannungsabstand	(IHF, Eingang kurzgeschlossen, A-Netz Nennleistung)		
PHONO	75 dB	70 dB	70 dB
AUX	87 dB	85 dB	80 dB
TAPE (Tonband)	87 dB	85 dB	80 dB
Dämpfungsfaktor	45 (1kHz, 8 Ohm)	45 (1kHz, 8 Ohm)	30 (1kHz, 8 Ohm)
Entzerrung	RIAA ± 0,5 dB	RIAA ± 1 dB	RIAA ± 1 dB
Tiefeneinstellung	± 10 dB (100Hz)	± 10 dB (100Hz)	± 10 dB (100Hz)
Mittenfrequenzeinstellung	± 6 dB (1 kHz)	——	——
Höheneinstellung	± 10 dB (10 kHz) (Lautstärkeregler auf −30 dB eingestellt)	± 10 dB (10 kHz)	± 10 dB (10kHz)
Gehörrichtige Lautstarkekontur	+ 9 dB (100Hz), + 4 dB (10kHz)	+ 9 dB (100Hz), + 4 dB (10kHz)	+ 9 dB (100Hz), + 4 dB (10kHz)
Höhenfilter	− 8 dB at 10kHz	−8 dB at 10kHz	−5 dB at 10kHz
Tiefenfilter	− 8 dB at 50Hz	−8 dB at 50Hz	——
Bestückung	1 FET, 5 ICs,57 Transistoren, 62 Dioden, 1 Thyristor	1 FET, 6 ICs, 34 Transistoren, 42 Dioden, 1 Thyristor	1 FET, 5 ICs, 24 Transistoren, 35 Dioden, 1 Thyristor
Hinterbandkontrolle	1, 2	1, 2	1, 2
Lautsprecherwähler	A, B, A + B	A, B, A + B	A, B, A + B
Abstimmanzeige	2	2	2
Lautsprecherklemmen	Steckanschlüsse	Steckanschlüsse	Steckanschlüsse
UKW-Stumm-/Scharfabstimmung	Vorhanden	——	——
Netzspannung	100/120/220/240V ~ 50/60Hz	100/120/220/240V ~ 50/60Hz	100/120/220/240V ~ 50/60Hz
Leistungsaufnafme	615W (4 Ohm), 430W (8 Ohm)	370W	320W
Abmessungen	490 (B) x 144(H) x 400(T)mm	490(B) x 144(H) x 400(T)mm	489 (B) x 143 (H) x 400 (T)mm
Gewicht	13,5 kg	13,0 kg	11,5 kg

Änderungen der technischen Daten bleiben im Sinne der ständigen Verbesserung vorbehalten.

SPECIFICATIONS

	SR-903	SR-803	SR-703
SECTION FM			
Bande de fréquence	88 – 108MHz	88 – 108MHz	88 – 108MHz
Sensibilité utilisable	1,2μV (DIN), 1,6μV (IHF)	1,5μV (DIN), 1,7μV (IHF)	1,6μV (DIN), 1,8μV (IHF)
Rapport signal/bruit	Mono : 74dB Stéréo : 68dB	Mono : 74dB Stéréo : 68dB	Mono : 74dB Stéréo : 68dB
Distorsion harmonique 100Hz	Mono : 0,2% Stéréo : 0,3%	Mono : 0,2% Stéréo : 0,3%	Mono : 0,3% Stéréo : 0,4%
1 kHz	Mono : 0,15% Stéréo : 0,25%	Mono : 0,15% Stéréo : 0,25%	Mono : 0,2% Stéréo : 0,3%
6 kHz	Mono : 0,25% Stéréo : 0,3%	Mono : 0,25% Stéréo : 0,3%	Mono : 0,3% Stéréo : 0,3%
Réponse de fréquence	30Hz – 15kHz (± 1 dB)	30Hz – 15kHz (± 1 dB)	30Hz – 15kHz ($^{+0,2}_{-1,5}$ dB)
Rapport de sélectivité	85 dB	85 dB	56 dB
Rapport de réception non-sélective	100 dB	100 dB	80 dB
Rapport en réception de fréquence intermédiaire	100 dB	100 dB	90 dB
Sélectivité du canal de rechange	80 dB	80 dB	60 dB
Rapport de captage	1 dB	1 dB	1 dB
Suppression AM	55 dB	55 dB	55 dB
Séparation stéréo	45 dB (1kHz)	45 dB (1kHz)	40 dB (1kHz)
Filtrage de la sousporteuse	65 dB	65 dB	——
Réjection SCA	65 dB	65 dB	65 dB
Seuil d'élimination des parasites	14μV	14μV	14μV
Entrée de l'antenne	300 ohms pondérés, 75 ohms non-pondérés	300 ohms pondérés, 75 ohms non-pondérés	300 ohms pondérés, 75 ohms non-pondérés
SECTION AM			
Bande de fréquence	530 – 1.605kHz	530 – 1.605kHz	530 – 1.605kHz

	SR-903	SR-803	SR-703
Sensibilité	300μV/m (S/B 20 dB), 20μV (IHF, Antenne ext.)	300μV/m (S/B 20 dB), 20μV (IHF, Antenne ext.)	300μV/m (S/B 20 dB), 20μV (IHF, Antenne ext.)
Rejet image	70 dB	50 dB	50 dB
Rejet FI	90 dB	50 dB	50 dB
Sélectivité (IHF)	40 dB	35 dB	36 dB
Rapport signal/bruit	50 dB	50 dB	50 dB
Antenne	Antenne en ferrite et borne séparée	Antenne en ferrite	Antenne en ferrite
SECTION AUDIO			
Sortie			
Puissance nominale (deux canaux)	75W/c. + 75W/c. (8 ohms, 20Hz – 20kHz, 0,1%) 95W/c. + 95W/c. (8 ohms, 1kHz, 0,1%) 105W/c. + 105W/c. (4 ohms, 1kHz, 0,1%)	50W/c. + 50W/c. (8 ohms, 20Hz – 20kHz, 0,1%) 60W/c. + 60W/c. (8 ohms, 1kHz, 0,1%) 70W/c. + 70W/c. (4 ohms, 1kHz, 0,1%)	40W/c. + 40W/c. (8 ohms, 20Hz – 20kHz, 0,3%) 55W/c. + 55W/c. (8 ohms, 1kHz, 0,3%) 60W/c. + 60W/c. (4 ohms, 1kHz, 0,3%)
Puissance musicale (IHF)	160W/c. + 160W/c. (8 ohms)	80W/c. + 80W/c. (8 ohms)	65W/c. + 65W/c. (8 ohms)
Sortie bande passante	10Hz – 50kHz	10Hz – 40kHz	10Hz – 30kHz
Bande passante	10Hz – 30kHz (± 1 dB)	10Hz – 30kHz (± 1 dB)	10Hz – 30kHz (± 1 dB)
Distorsion harmonique			
(à la puissance nominale)	Moins que 0,1%	Moins que 0,1%	Moins que 0,3%
(à la puissance de la puissance nominale)	Moins que 0,03%	Moins que 0,05%	Moins que 0,07%
Distorsion d'intermodulation			
(à la puissance nominale)	0,3%	0,4%	Moins que 0,5%
(à la moitié de la puissance nominale)	0,03%	0,05%	Moins que 0,1%
Sensibilité d'entrée	(sous 80W, 1kHz de sortie)	(sous 55W, 1kHz de sortie)	(sous 45W, 1kHz de sortie)
PHONO	1,9mV (47 k-ohms)	2,5mV (47 k-ohms)	2,5mV (47 k-ohms)
AUX	150mV (50 k-ohms)	150mV (50 k-ohms)	200mV (50 k-ohms)
TAPE-1	150mV (50 k-ohms)	150mV (50 k-ohms)	200mV (50 k-ohms)
TAPE-2	150mV (50 k-ohms)	150mV (50 k-ohms)	200mV (50 k-ohms)
ADAPTOR	150mV (50 k-ohms)	———	———
DIN	400mV (120 k-ohms)	450mV (120 k-ohms)	450mV (70 k-ohms)
Neveau sortie			
TAPE OUT	150mV (PHONO, AUX à l'entrée nominale) 200mV (FM 400Hz, 30% d'entrée dev. : 1mV) 150mV (AM 400Hz, 30% d'entrée mod. : 5mV/m)	150mV (PHONO, AUX à l'entrée nominale) 150mV (FM 400Hz, 30% d'entrée dev. : 1mV) 150mV (AM 400Hz, 30% d'entrée mod. : 5mV/m)	200mV (PHONO, AUX à l'entrée nominale) 200mV (FM 400Hz, 30% d'entrée dev. : 1mV) 200mV (AM 400Hz, 30% d'entrée mod. : 5mV/m)
DIN OUT	40mV (PHONO à l'entrée nominale)	40mV (PHONO à l'entrée nominale)	40mV (PHONO à l'entrée nominale)
Rapport signal/bruit (IHF, entrée court-circuitée, reseau A, puissance nominale)			
PHONO	75 dB	70 dB	70 dB
AUX	87 dB	85 dB	80 dB
TAPE	87 dB	85 dB	80 dB
Facteur d'atténuation	45 (1kHz, 8 ohms)	45 (1kHz, 8 ohms)	30 (1kHz, 8 ohms)
Compensateur	RIAA ± 0,5 dB	RIAA ± 1 dB	RIAA ± 1 dB
Basse	± 10 dB (100Hz)	± 10 dB (100Hz)	± 10 dB (100Hz)
Fréquence moyenne	± 6 dB	———	———
Aigu	± 10 dB (10kHz)	± 10 dB (10kHz)	± 10 dB (10kHz)
Correction sonore physiologique	+ 9 dB (100Hz), + 4 dB (10kHz)	+ 9 dB (100Hz), + 4 dB (10kHz)	+ 9 dB (100Hz), + 4 dB (10kHz)
Filtre passe-haut	– 8 dB at 10kHz	–8 dB at 10kHz	–5 dB at 10kHz
Filtre passe-bas	– 8 dB at 50Hz	–8 dB at 50Hz	———
Semi-conducteurs	1FET, 5CI, 57 transistors, 62 diodes, 1 thyristor	1 FET, 6 CI, 34 transistors, 42 diodes, 1 thyristor	1 FET, 5 CI, 24 transistors, 35 diodes, 1 thyristor
Condtôle de bande	1, 2	1, 2	1,2
Interrupteur de hautparleurs	A, B, A + B	A, B, A + B	A, B, A + B
Indicateur de syntonisation	2	2	2
Borne d'enceinte	Borne à une touche	Borne à une touche	Borne à une touche
FM MUTING AUTO LOCK (Sourdine FM/verrouillage automatique)	Prévu	———	———
Alimentation	100/120/220/240V ~ 50/60Hz	100/120/220/240V ~ 50/60Hz	100/120/220/240V ~ 50/60Hz
Consommation	615W (4 ohms), 430W (8 ohms)	370W	320W
Dimensions	490(L) x 144(H) x 400(P)mm	490(L) x 144(H) x 400(P)mm	489(L) x 143(H) x 400(P)mm
Poids	13,5 kg	13,0 kg	11,5 kg

Les caractéristiques techniques et la présentation peuvent être modifiées sans préavis pour des raisons d'amélioration.

FEATURES·MERKMALE·CARACTERISTIQUES

SR-903

Tuner Section

1. Dual Gate MOS FET for High Quality FM Tuner
2. Auto-Lock AFC Circuit
3. High Selectivity and Low Distortion IF Amplifier Using ICs and 3 Ceramic Filters
4. Quadrature Detection
5. Phase Lock Loop for FM/MPX Circuit
6. A Ceramic Filter, IC in AM Tuner
7. Two Large Easy-to-read Meters and a Large-sized Flywheel Tuning Konb

Audio Section

1. A Newly Developed High Efficiency High Power Audio Amplifier (named series E Amplifier)
2. Electronic Protection Circuit
3. New IC in the Equalizer
4. Tape Dubbing
5. Midrange Tone Control
6. A Low Filter and a High Filter
7. Two Speaker Systems Connection

Rundfunkempfangsteil

1. Doppelsteuer-MOS-FET für den hochwertigen UKW-Tuner
2. Schaltung für automatische UKW-Scharfabstimmung
3. ZF-Verstärker mit großer Selektivität und geringem Klirrfaktor, der mit ICs und 3 Keramikfiltern bestückt ist
4. Phasenschieberkreis
5. Phasenstarre Schleife für die UKW/MPX-Schaltung
6. Keramikfilter, integrierte Schaltung im Tuner
7. Zwei große, gut lesbare Meßinstrumente und großdimensionierter Schwungrad-Abstimmknopf

Audio-Teil

1. Neuentwickelter Tonverstärker mit hoher Ausgangsleistung (als Verstärker der Modellserie E bezeichnet)
2. Elektronikschutzschaltung
3. Neue integrierte Schaltung im Entzerrer
4. Bandaufnahme vom Original
5. Mittenfrequenzregler
6. Tiefen-und Höhenfilter
7. Anschluß für zwei Boxenpaare

Section Tuner

1. MOS FET à double porte pour Tuner FM de haut de gamme
2. Circuit AFC auto-verrouillable
3. Amplificateur FM à faible taux de distorsion et haute sélectivité employant des circuits intégrés et 3 filtres céramiques
4. Détection quadriphonique
5. Boucle à blocage de phase pour le circuit FM/MPX
6. Filtre céramique et circuits intégrés dans le tuner AM
7. Deux grands indicateur d'accord faciles à lire et un bouton de syntonisation à volant surdimensionné

Section Audio

1. Amplificateur à grande puissance et haut rendement nouvellement créé (appelé amplificateur série E)
2. Circuit électronique de protection
3. De nouveaux circuits intégrés dans l'égalisateur et dans l'amplificateur principal
4. Copiage de bande
5. Commande de tonalités moyennes
6. Filtre passe-bas et filtre passe-haut
7. Branchement de deux paires de haut-parleurs

SR-803

Tuner Section

1. High Quality FM Tuner
2. High Selectivity and Low Distortion IF Amplifier Using ICs and 2 Ceramic Filters
3. Quadrature Detection
4. Phase Lock Loop for FM/MPX Circuit
5. A Ceramic Filter, IC in AM Tuner
6. Two Large Easy-to-read Meters and a Large-sized Flywheel Tuning Knob

Audio Section

1. All-stage Direct-connection Inverted Darlington OCL Amplifier
2. Electronic Protection Circuit
3. New ICs in the Equalizer and Main Amplifier
4. Tape Dubbing
5. Two Speaker System Connections

Rundfunkempfangsteil

1. Hochwertiger UKW-Tuner
2. ZF-Verstärker mit großer Selektivität und geringem Klirrfaktor, mit ICs und 2 Keramikfiltern bestückt
3. Phasenschieberkreis
4. Phasenstarre Schleife für die UKW/MPX-Schaltung
5. Keramikfilter und integrierte Schaltung im MW-Tuner
6. Zwei große, gut lesbare Meßinstrumente und ein großdimensionierter Schwungrad-Abstimmknopf

Audio-Teil

1. Vollstufiger, direkt gekoppelter Darlington-OCL-Gegentaktverstärker
2. Elektronikschutzschaltung
3. Neue integrierte Schaltungen im Entzerrer und Hauptverstärker
4. Bandaufnahme vom Original
5. Anschluß für zwei Lautsprecherpaare

Section Tuner

1. Tuner FM de haute qualité
2. Amplificateur FM à faible taux de distorsion et haute sélectivité employant des circuits intégrés et 2 filtres céramiques
3. Détection de quadrature
4. Boucle à blocage de phase pour le circuit FM/MPX
5. Filtre céramique et circuits intégrés dans le tuner AM
6. Deux grands indicateurs d'accord faciles à lire et un bouton de syntonisation à volant surdimensionné

Section Audio

1. Amplificateur OCL Darlington inversé à connexion directe tous étages
2. Circuit électronique de protection
3. Nouveaux CI dans le circuit correcteur et amplificateur principal
4. Copiage de bande
5. Branchement de deux paires d'enceintes

SR-703

Tuner Section

1. High Quality FM Tuner
2. High Selectivity and Low Distortion IF Amplifier Using IC and 2 Ceramic Filters
3. Quadrature Detection
4. Phase Lock Loop for FM/MPX Circuit
5. A Ceramic Filter, IC in AM Tuner
6. Two Large Easy-to-read Meters and a Large-sized Flywheel Tuning Knob

Audio Section

1. All-stage Direct-connection Inverted Darlington OCL Amplifier
2. Electronic Protection Circuit
3. New ICs in the Equalizer and Main Amplifier
4. Tape Dubbing
5. Two Speaker System Connections

Rundfunkempfangsteil

1. Hochwertiger UKW-Tuner
2. ZF-Verstärker mit großer Selektivität und geringem Klirrfaktor, mit ICs und 2 Kermikfiltern bestückt
3. Phasenschieberkreis
4. Phasenstarre Schleife für die UKW/MPX-Schaltung
5. Keramikfilter und integrierte Schaltung im MW-Tuner
6. Zwei große, gut lesbare Meßinstrumente und ein großdimensionierter Schwungrad-Abstimmknopf

Audio-Teil

1. Vollstufiger, direkt gekoppelter Darlington-OCL-Gegentaktverstärker
2. Elektronikschutzschaltung
3. Neue integrierte Schaltungen im Entzerrer und Hauptverstärker
4. Bandaufnahme vom Original
5. Anschluß für zwei Lautsprecherpaare

Section Tuner

1. Tuner FM de haute qualité
2. Amplificateur FM à faible taux de distorsion et haute sélectivité employant un circuit intégré et 2 filtres céramiques
3. Détection de quadrature
4. Boucle à blocage de phase pour le circuit FM/MPX
5. Filtre céramique et circuits intégrés dans le tuner AM
6. Deux grands indicateurs d'accord faciles à lire et un bouton de syntonisation à volant surdimensionné

Section Audio

1. Amplificateur OCL Darlington inversé à connexion directe tous étages
2. Circuit électronique de protection
3. Nouveaux CI dans le circuit correcteur et amplificateur principal
4. Copiage de bande
5. Banchement de deux paires d'enceintes

DISASSEMBLY AND REPLACEMENT·ZERLEGUNG UND AUSTAUSCH· DEMONTAGE ET REPLACEMENT

- **Removing the cabinet, front panel & bottom plate**
- **Gehäuse, Fronttafel und Gehäuseunterseite abnehmen**
- **Déposer le coffrage, le panneau avant et la plaque inférieure**

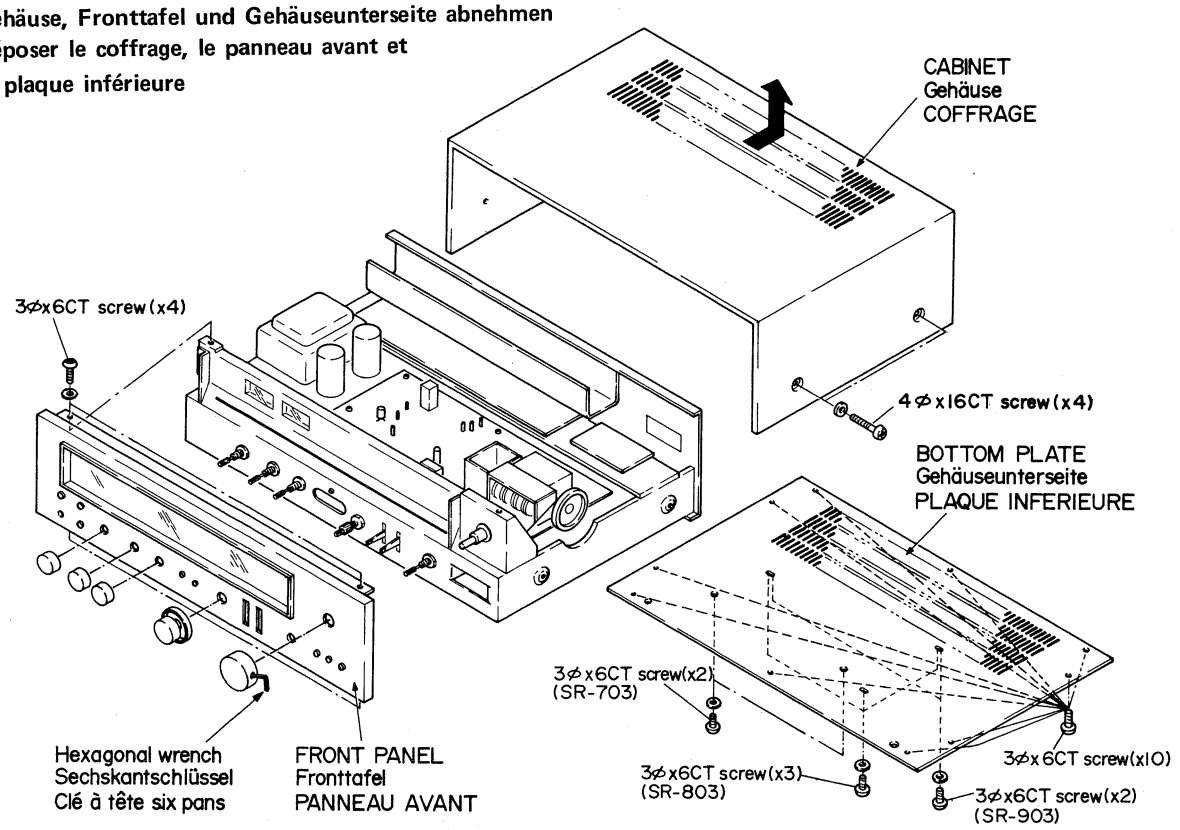

Fig. 1
Abb. 1

SR-903

- **Removing the printed wiring boards**
- **Ausbau der Leitterplatten**
- **Déposer des plaquettes à circuit imprimé**

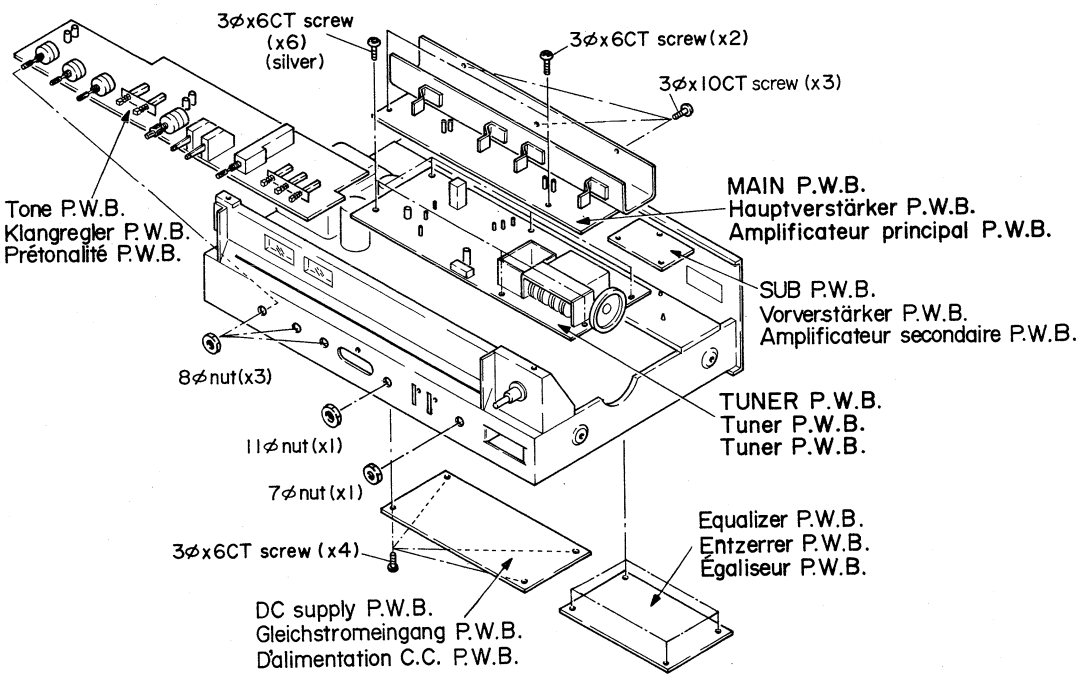

Fig. 2
Abb. 2

SR-803

- **Removing the printed wiring boards**
- **Ausbau der Leitterplatten**
- **Déposer des plaquettes à circuit imprimé**

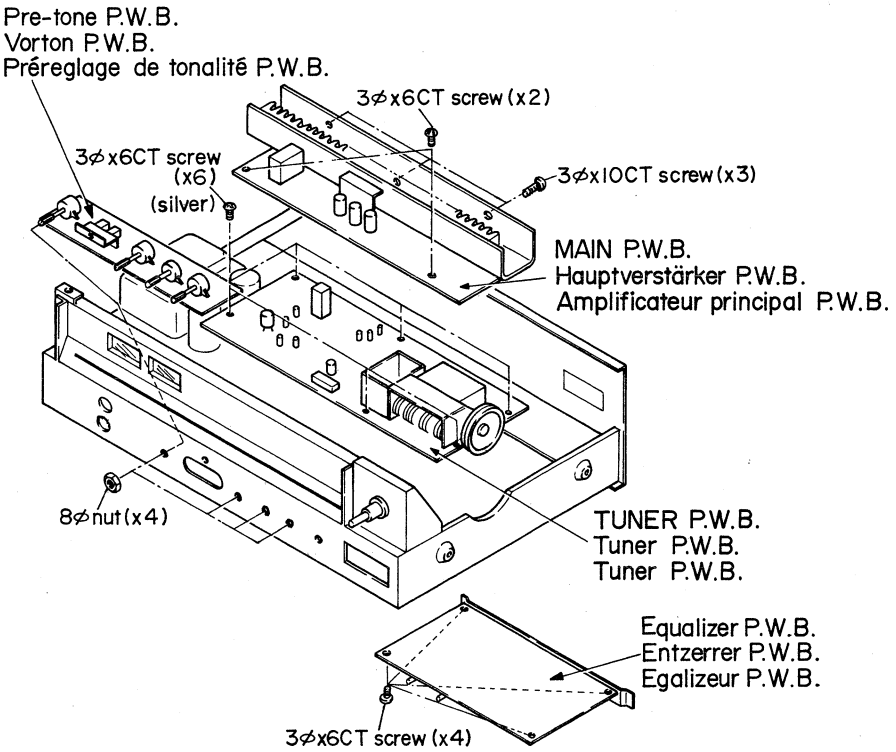

Fig. 3
Abb. 3

SR-703

- **Removing the printed wiring boards**
- **Ausbau der Leitterplatten**
- **Déposer des plaquettes à circuit imprimé**

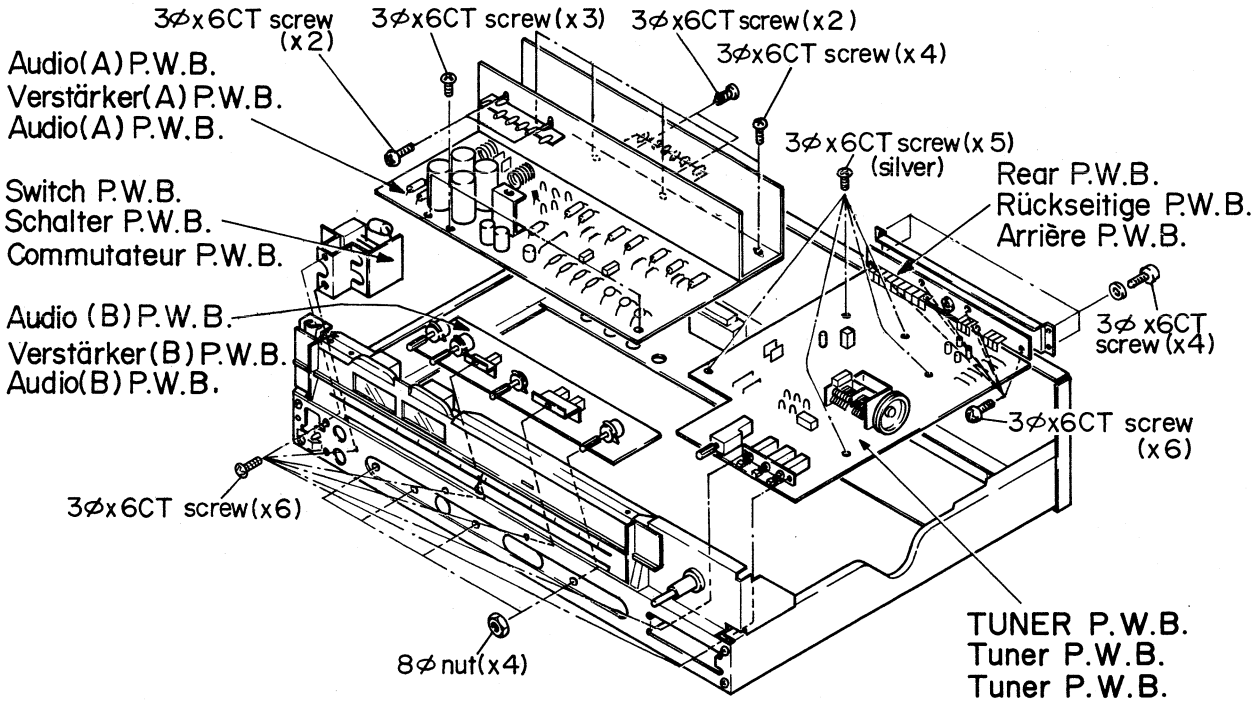

Fig. 4
Abb. 4

DIAL CORD SETTING·SKALENSEILEINSTELLUNG·EQUIPEMENT DE CADRAN

The dial pulley shows the position that the tuning shaft is turned to the counterclockwise direction.

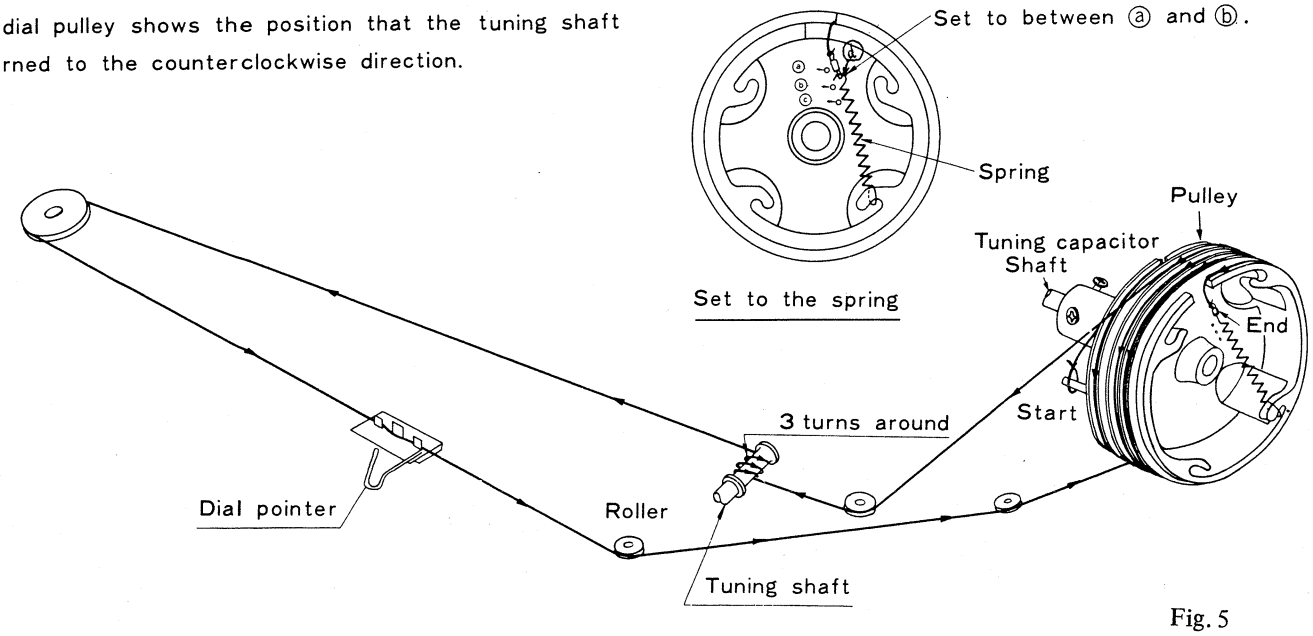

Fig. 5

GENERAL ALIGNMENT INSTRUCTION · ALLGEMEINE AUSRICHTANLEITUG· INSTRUCTION GENERALE

(SR-903·803)

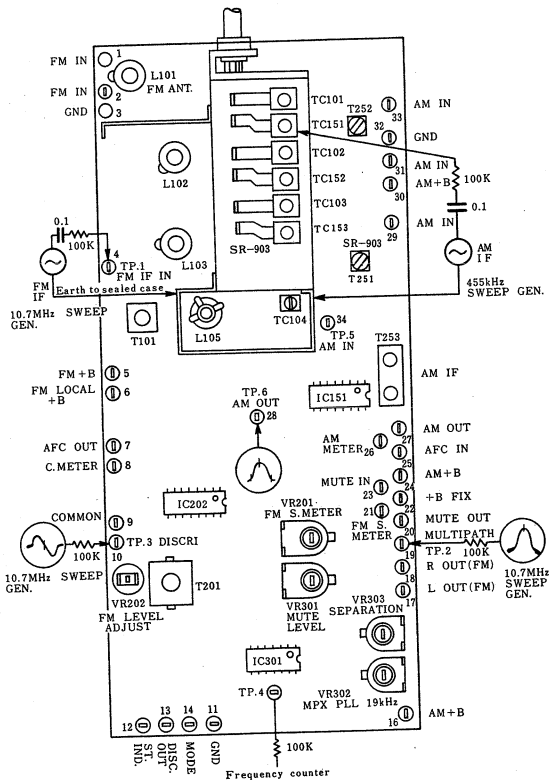

Fig. 6

(SR-703)

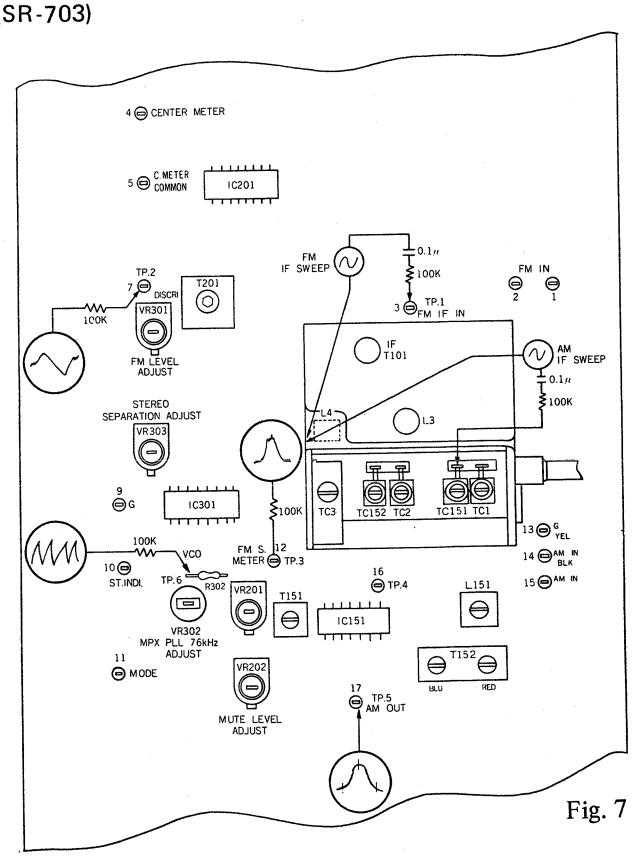

Fig. 7

FM TUNER ALIGNMENT

Test condition

FUNCTION ..... AM
VOLUME ..... Minimum

Steps		Item	Measuring Instrument	Input Terminal	Output Terminal	Frequency	Adjust	Wave Form
1	(1)	IF Amplifier	10.7MHz ± 150kHz Sweep Generator	TP 1	TP 2 TP 3		T101	CAUTION (1)
	(2)	"S" curve		TP 1	TP 3 TP 2		T201	CAUTION (2)
2	(1)	Covering	2.1 FM siganl generator 87.5MHz 400Hz 100% modulated, 60dB at input * AC voltmeter	Antenna terminal	REC OUT (L) or SP OUT (L)	(87.5MHz Tune the dial pointer at low freqiemcy end)	L105 (SR-903, 803) L4 (SR-703)	Output Max.
	(2)		2.2 FM signal generator 108MHz 400Hz 100% modulated, 60dB at input * AC voltmeter			108MHz (Turn the dial pointer at 108MHz)	TC104 (SR-903, 803) TC3 (SR-703)	
	(3)							Repeat (1) & (2)
3	(1)	Tracking	3.1 FM signal Generator 90MHz 400Hz 100% modulated, 10dB at input * AC voltmeter	Antenna terminal	REC OUT (L) or SP OUT (L)	90MHz	L101, L102 L103 (SR-903, 803) L3 (SR-703)	Output Max.
	(2)		3.2 FM signal generator 106MHz 400Hz 100% modulated, 10dB at input * AC voltmeter			106MHz	TC101, TC102 TC103 (SR-903, 803) TC1, TC2 (SR-703)	
	(3)							Repeat (1) & (2)
4		Discriminate	FM signal generator 98MHz 400Hz 100% modulated, 10dB at input *AC voltmeter	Antenna terminal	REC OUT (L) or SP OUT (L)	98MHz (SR-903, 703) 100MHz (SR-803)	T201 (lower)	Cut the input signal level of FM signal generator and set the pointer of tuning meter to the center mark.
5		Distortion	FM signal generator 98MHz 400Hz 100% modulated, 60dB at input Distortion meter	Antenna terminal	REC OUT (L) or SP OUT (L)	98MHz (SR-903,703) 100MHz (SR-803)	T201 (upper)	Adjust T201 so that distortion will become min. CAUTION (3)
6		Output	FM signal generator 98MHz 400Hz 30% modulated, 60dB at input * AC voltmeter	Antenna terminal	REC OUT (L)	98MHz	VR202 (SR-903, 803) VR301 (SR-703)	150mV ±1dB (SR-903, 803) 200mV ± 1dB (SR-703)
7		FM Muting	FM signal generator 98MHz 400Hz 100% modulated, 20dB at input * AC voltmeter	Antenna terminal	REC OUT (L) or SP OUT (L)	98MHz	VR301 (SR-903, 803) VR202 (SR-703)	Adjust *VR301 so that the output signal can occur then the input signal is 24 ± 6dB. * VR301(SR-903, 803) VR202 (SR-703)
8		Signal Meter	FM signal generator 98MHz 400Hz 100% modulated, 10dB at input * AC voltmeter	Antenna terminal	Signal Meter	98MHz	VR201	Adjust VR201 so that deviation of the pointer in signal meter will be 4–5.

* AC voltmeter SR-903, 703
V.T.V.M. SR-803

CAUTION

1. Short-circuit the OSC stage by earthing the live side of the varrialbe capacitor in that stage.
   Adjust the core of T101 so that the gain will be max. In this case, reduce the level of the input signal of signal generator so that the waveform will be one shown in Fig. 8.
2. Short-circuit the OSC stage as described in Caution 1.
   Adjust the primary core (lower) of T201 so that the output is like the S curve shown in Fig. 9 with A and B symmetrical with respect to C.
   Adjust the secondary core (upper) so that the straight line of the S curve can be achieved.
   At the time of adjustment in Caution 1 and 2, center of the marker will sometimes not correspond to that of the waveform because of the ceramic filters used.
3. As the result of the adjustment step 5, the best point of adjustment from step 4 will be shifted a bit. Repeat the adjustment of step 4 and 5 until the deterioration becomes minimum and the pointer of the tuning meter is in its center.

Fig. 8.



Fig. 9

FM MPX ALIGNMENT

FUNCTION ..... FM MUTE/AUTO LOCK
VOLUME ..... Minimum

Steps		Item	Measuring Instrument	Input Terminal	Output Terminal	Frequency	Adjust	Wave Form
1		19kHz Free Running Frequency	FM signal generator 98MHz non-modulated 60dB at input *AC voltmeter, Frequency counter	Antenna terminal	TP 4 (SR-903 803) TP 6 (SR-703)	98MHz	VR302	Adjust VR302 so that the counter will indicated *19kHz ± 30Hz.
2	(1)	Separation	1. FM signal generator 98MHz, 60dB at input 2. Stereo signal generator Main signal 92% modulated Pilot signal 8% modulated AC voltmeter *	Antenna terminal	REC OUT (L) or SP OUT (L)	98MHz (SR-903, 703) 100MHz (SR-803)	VR303	After making the siganl of Rch and Pilot, adjust VR303 so that the output wave form of Lch becomes min.
	(2)							Optimize VR303 so that the leak level of the Lch signal is equal to that of the Rch signal.

* AC voltmeter (SR-903, 703)
V.T.V.M. (SR-803)

* 19kHz ±30Hz (SR-903, 803)
76kHz ±60Hz (SR-703)

AM TUNER ALIGNMENT

Test condition

FUNCTION ..... AM
VOLUME ..... Minimum

Steps		Item	Measuring Instrument	Input Terminal	Output Terminal	Frequency	Adjust	Wave Form
1		IF Amplifier	Sweep generator 455kHz	TC151	TP 6 TP 5		T253 (SR-903, 803) T151, 152 (SR-703 only)	Gain Max. CAUTION (4)
2	(1)	Covering	AM signal generator 600kHz 400Hz 30% modulated 50dB at input *AC voltmeter	Ferrite antenna	REC OUT or SP OUT	600kHz	T252 (SR-903, 803) L151 (SR-703 only)	Gain Max. CAUTION (5)
	(2)		AM signal generator 1400kHz 400Hz 30% modulated, 50dB at input *AC voltmeter			1400kHz	TC152	
	(3)							Repeat (1) and (2)
3	(1)	Tracking	AM signal generator 600kHz 400Hz 30% modulated, 50dB at input *AC voltmeter	Ferrite antenna	REC OUT or SP OUT	600kHz	Ferrite antenna T251 (SR-903 only)	Gain Max. CAUTION (5)
	(2)		AM signal generator 1400kHz 400Hz 30% modulated, 50dB at input AC voltmeter			1400kHz	TC151 TC153 (SR-903 only)	
	(3)		*					Repeat (1) and (2)

* AC voltmeter (SR-903, 703)
V.T.V.M. (SR-803)

CAUTION

4. In item 1, set the capacitance of the variable capacitor to minimum and adjust red and blue cores of T253 so that the waveform is as shown in Fig. 10. As T253 contains a 455kHz ceramic filter, sometimes the center of the marker will not correspond to that of the waveform.
   In this case, neglect the marker. After adjusting as above,increase the output level of the sweep generator and adjust T253 again so that the top of the waveform A (indicated in Fig. 11) will be flat and wide.
5. In items 2 and 3, at the time of first adjustment, set input power at 74dB and adjust obtaining the minimum necessary input power (50 dB).

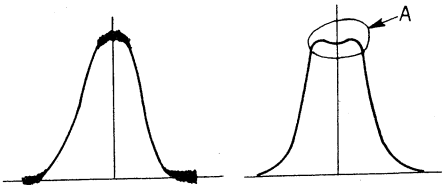

Fig. 10 Fig. 11

AUDIO CIRCUIT ALIGNMENT

(SR-903)

Test condition

FUNCTION ..... Free
VOLUME ..... Minimum

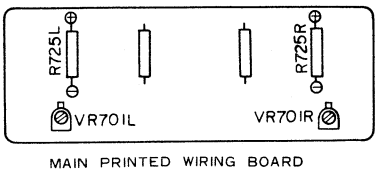

Fig. 12

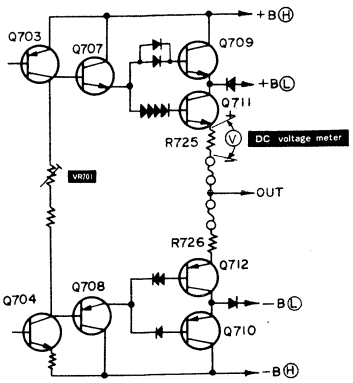

Fig. 13

Perform this adjustment approx. 10 minutes after the power switch ON.

Item	Measuring Instrument	Point to be Measured	Adjust	Value Adjusted
Idle Current	DC voltmeter	R725 L,R	VR701 L,R	13.2V ± 4.4mV (60 ± 20mA)

(SR-803)

Item	Measuring Instrument	Point to be Measured	Adjust	Value Adjusted
Idle Current	DC volt meter	R713 L,R	VR701 L,R	20±10mV (40±20mA)

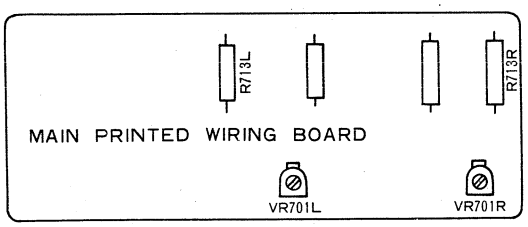

Fig. 14

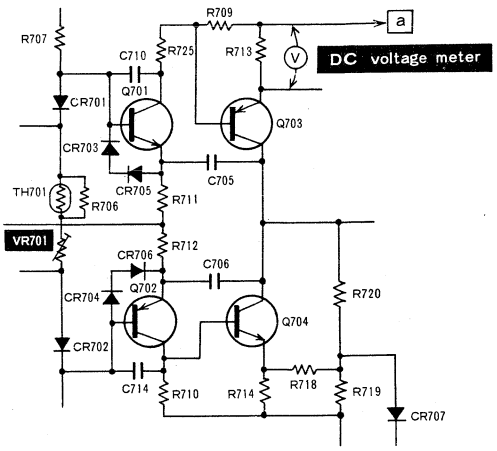

(This figure shows L channel only.)

Fig. 15

(SR-703)

Test conditions

FUNCTION ..... Free
VOLUME ..... Minimum

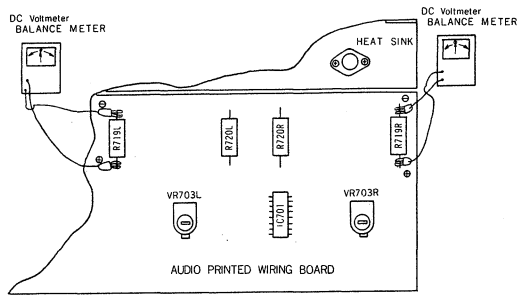

Fig. 16



Fig. 17

Perform this adjustment approx. 5 minutes after the power switch ON.

Item	Measuring Instrument	Point to be Measured	Adjust	Value Adjusted
Idle Current	DC voltmeter	R719 L,R	VR703 L,R	20 ± 10mV (40 ±20mA)

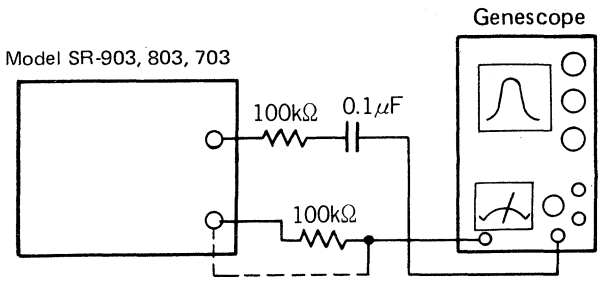

Fig. 18 FM IF Discriminator and AM IF alignments (AM and FM Step. 1)

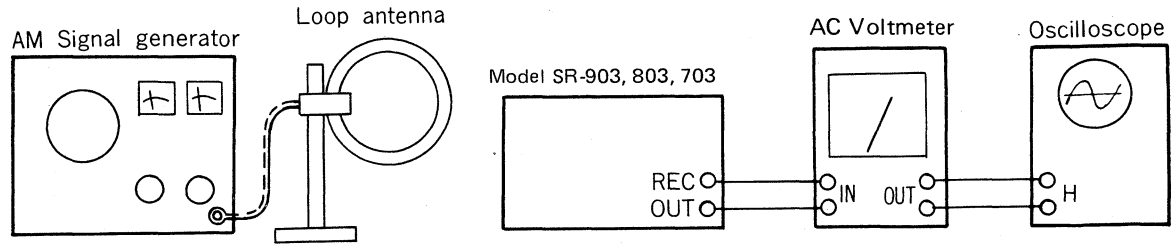

Fi.g 19 AM frequency covering and tracking alignments (Step. 2 and 3)

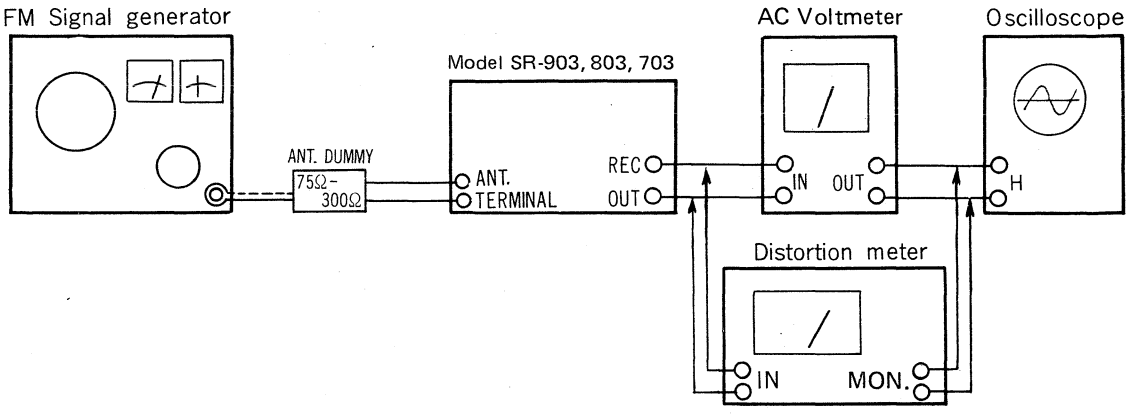

Fig. 20 FM frequency covering, tracking and other alignments (Step. 2 to 8)

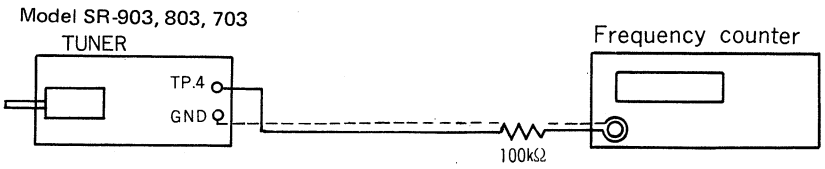

Fig. 21 FM MPX 19 kHz adjustment (Step. 1)

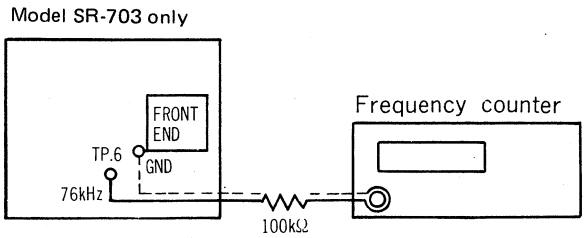

Fig. 22 FM MPX 76 kHz adjustment

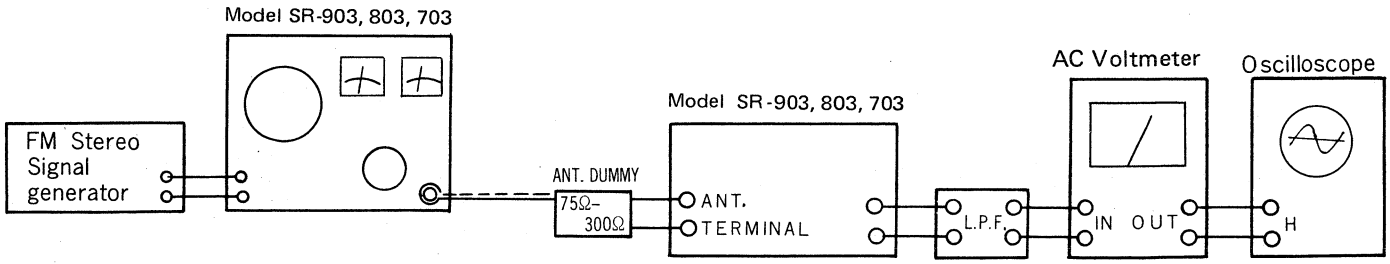

Fig. 23 FM MPX alignments (Step. 2)

BLOCK DIAGRAM·BLOCKSCHEMA·SCHEMA

SR-903

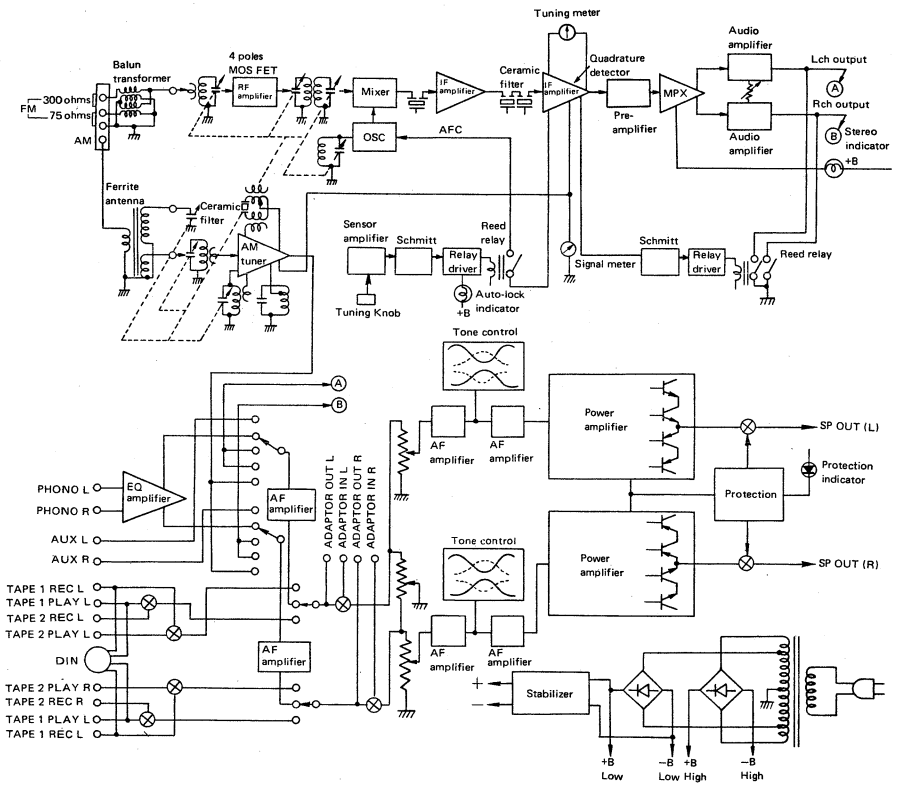

SR-803

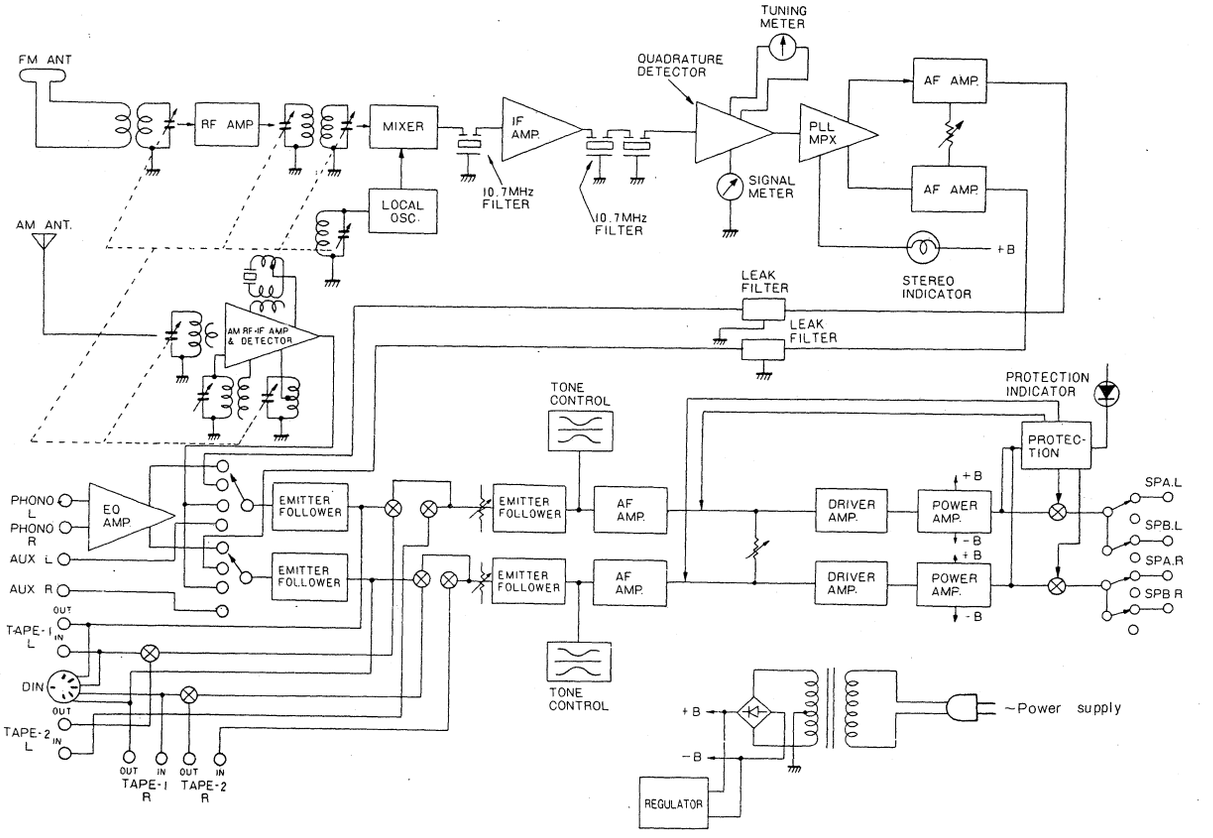
TUNING METER
FM ANT
QUADRATURE DETECTOR
RF AMP
MIXER
IF AMP.
PLL MPX
AF AMP.
AF AMP.
LOCAL OSC.
10.7MHz FILTER
10.7MHz FILTER
SIGNAL METER
AM ANT.
+B
STEREO INDICATOR
LEAK FILTER
LEAK FILTER
AM RF·IF AMP & DETECTOR
TONE CONTROL
PROTECTION INDICATOR
PROTEC-TION
PHONO L
PHONO R
AUX L
AUX R
EQ AMP.
EMITTER FOLLOWER
EMITTER FOLLOWER
AF AMP.
DRIVER AMP.
POWER AMP.
SPA.L
SPB.L
SPA.R
SPB.R
TAPE-1 L
DIN
TAPE-2 L
TONE CONTROL
~Power supply
REGULATOR
OUT IN OUT IN
TAPE-1 R
TAPE-2 R

SR-703

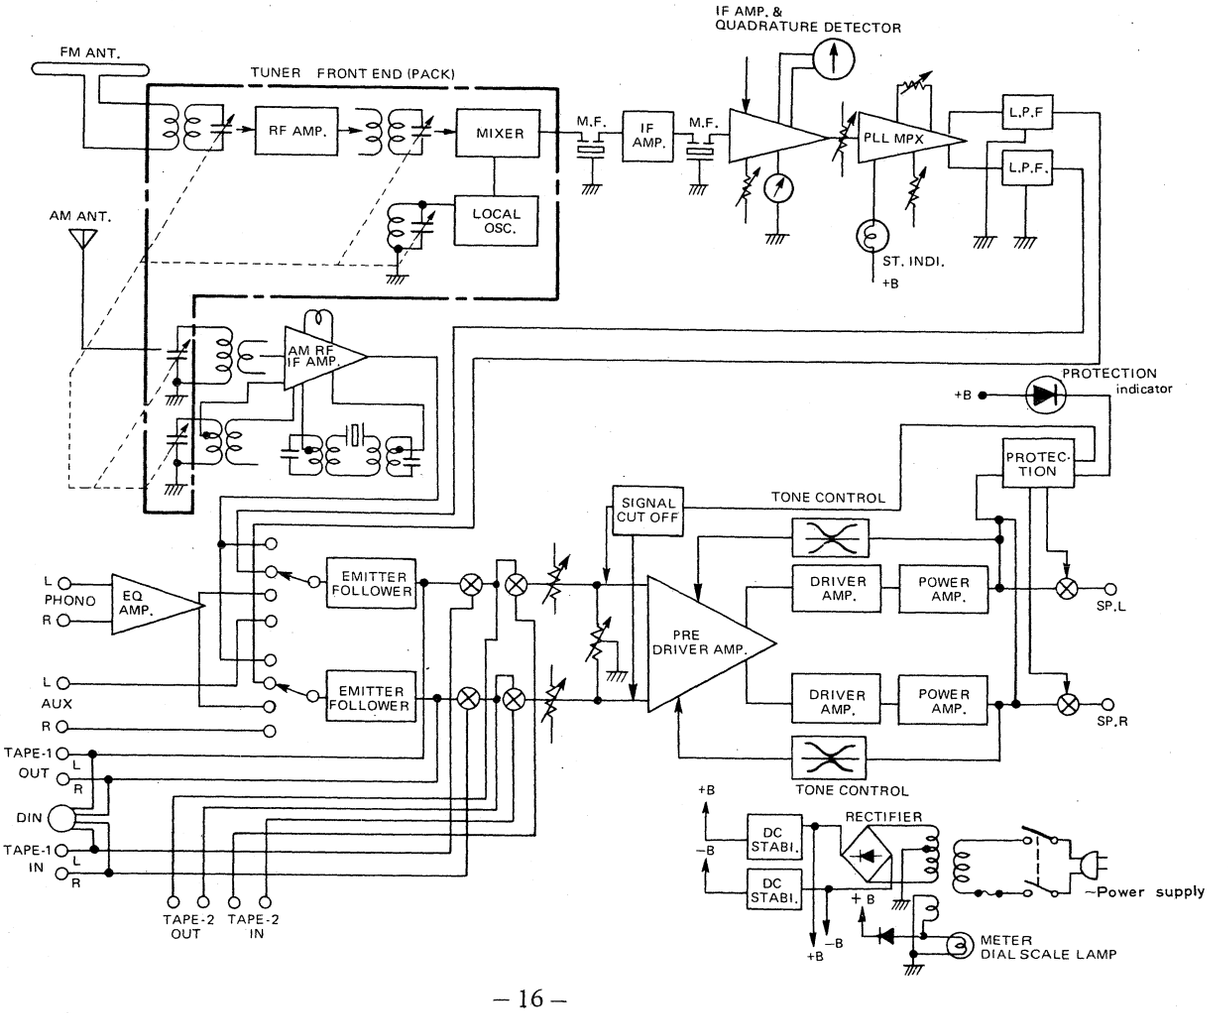
IF AMP. & QUADRATURE DETECTOR
FM ANT.
TUNER FRONT END (PACK)
RF AMP.
MIXER
M.F.
IF AMP.
M.F.
PLL MPX
L.P.F
L.P.F.
AM ANT.
LOCAL OSC.
ST. INDI.
+B
AM RF IF AMP.
PROTECTION indicator
+B
PROTEC-TION
SIGNAL CUT OFF
TONE CONTROL
L
PHONO
R
EQ AMP.
EMITTER FOLLOWER
DRIVER AMP.
POWER AMP.
SP.L
PRE DRIVER AMP.
L
AUX
R
EMITTER FOLLOWER
DRIVER AMP.
POWER AMP.
SP.R
TAPE-1 OUT
L
R
TONE CONTROL
DIN
TAPE-1 IN
L
R
+B
RECTIFIER
DC STABI.
DC STABI.
~Power supply
TAPE-2 OUT
TAPE-2 IN
METER DIAL SCALE LAMP

SR-903
PRINTED WIRING BOARD·PRINTPLATTEN·PLAN DE BASE

TUNER PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

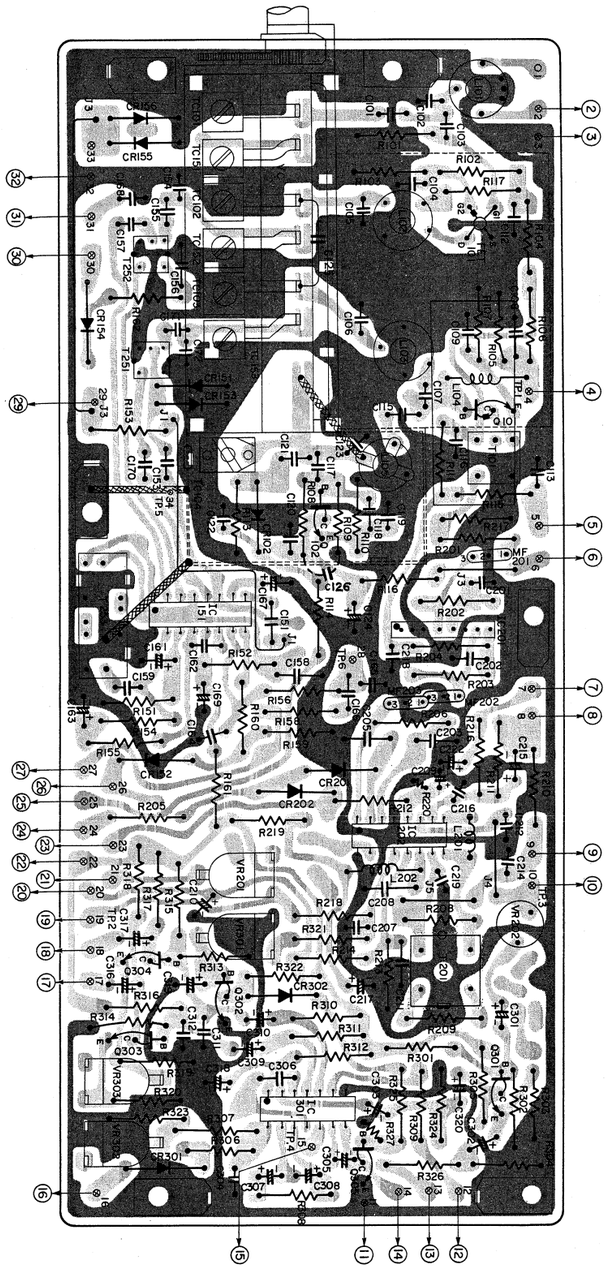

EQUALIZER PRINTED WIRING BOARD

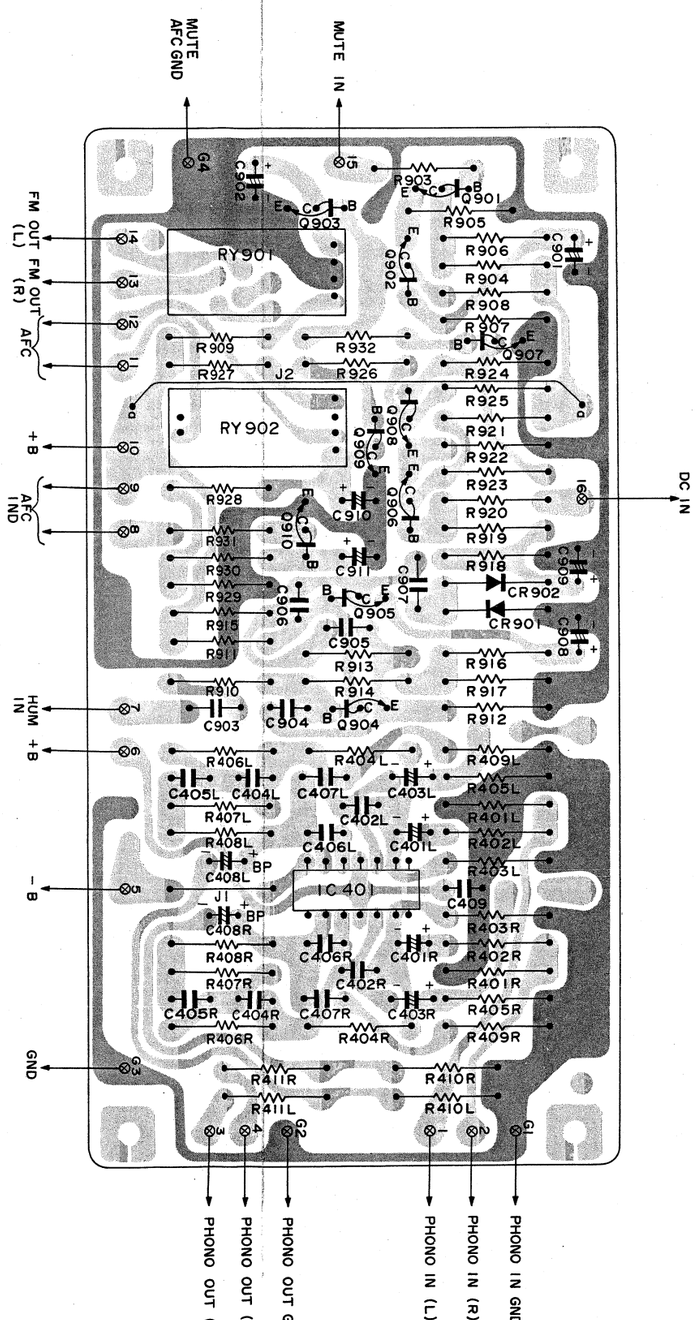

DC SUPPLY PRINTED WIRING BOARD

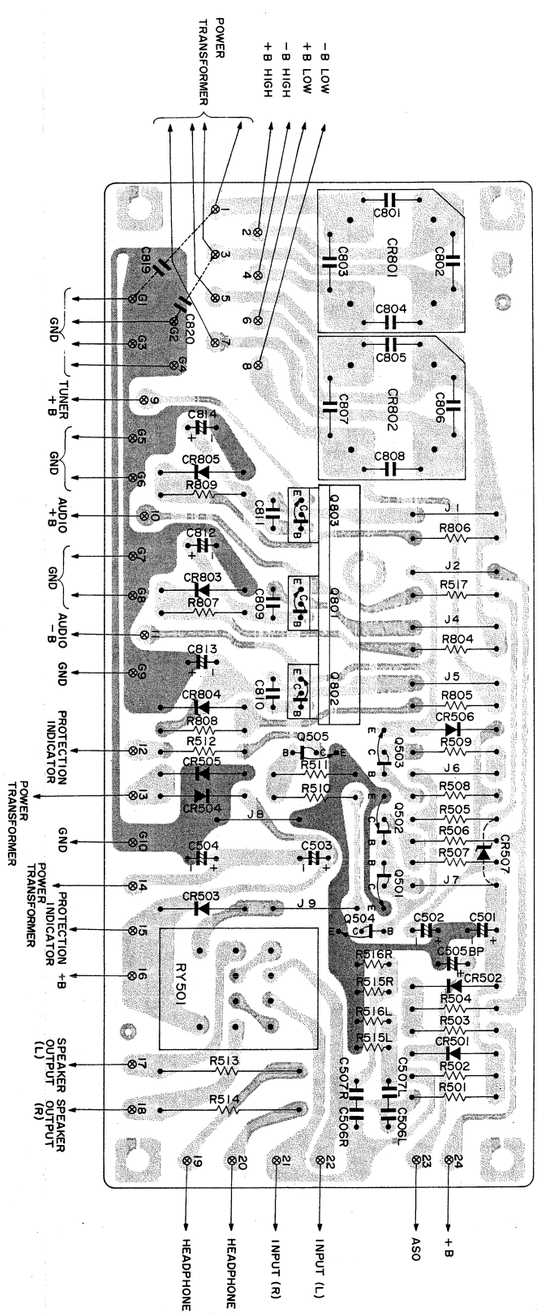

SR-903
MAIN AMPLIFIER PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

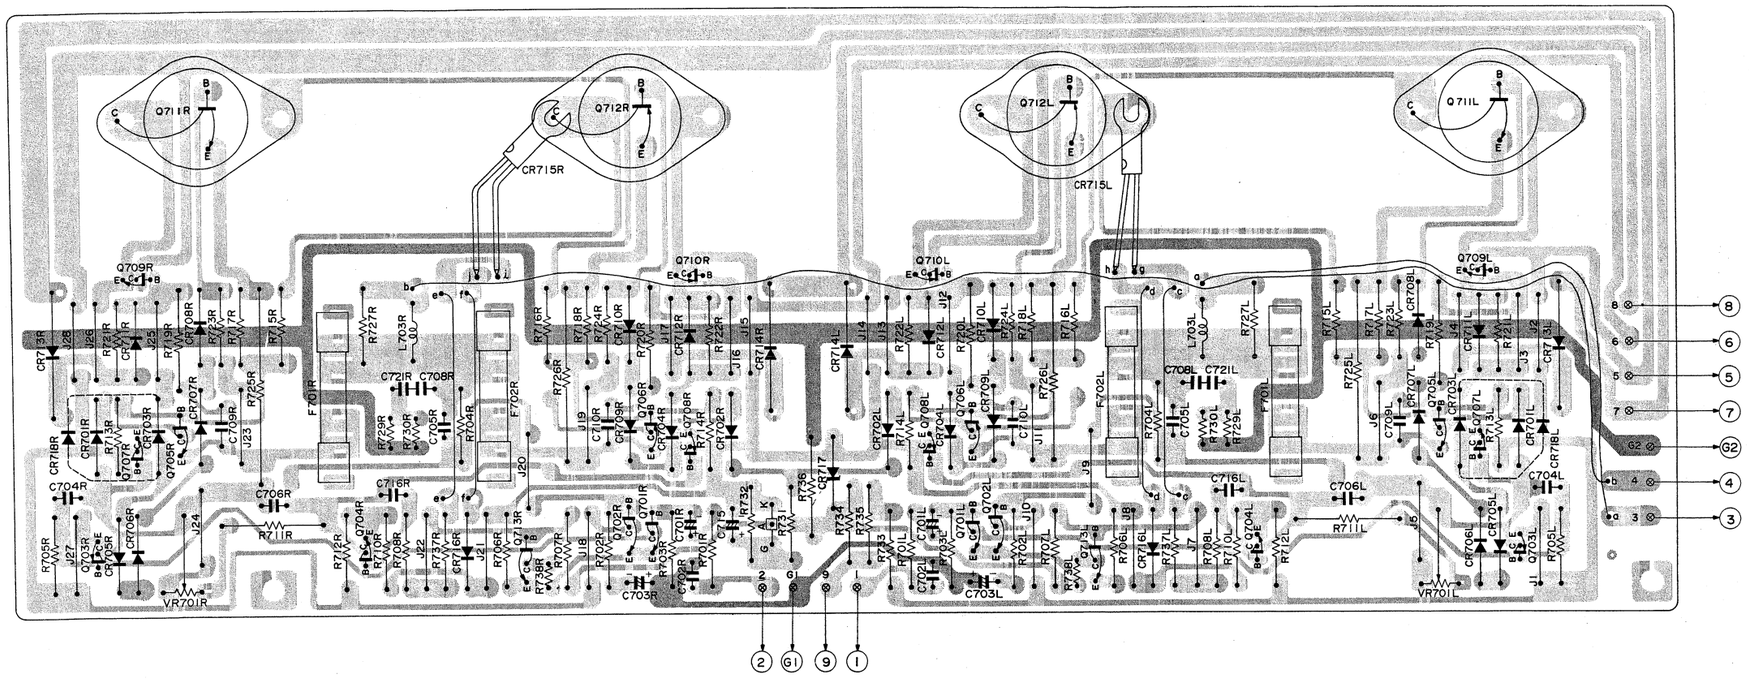

HA1211



2SC1514



2SB628
2SD608



HA1452W
HA1156WZ



2SB568A
2SD478



2SA872B
2SC1775



HA1137
HA1138



2SC1345
2SC1344
2SC535

2SA844
2SC1213
2SC461



2SD581A
2SB611A



3SK45



2SB616
2SD586



TONE CONTROL PRINTED WIRING BOARD

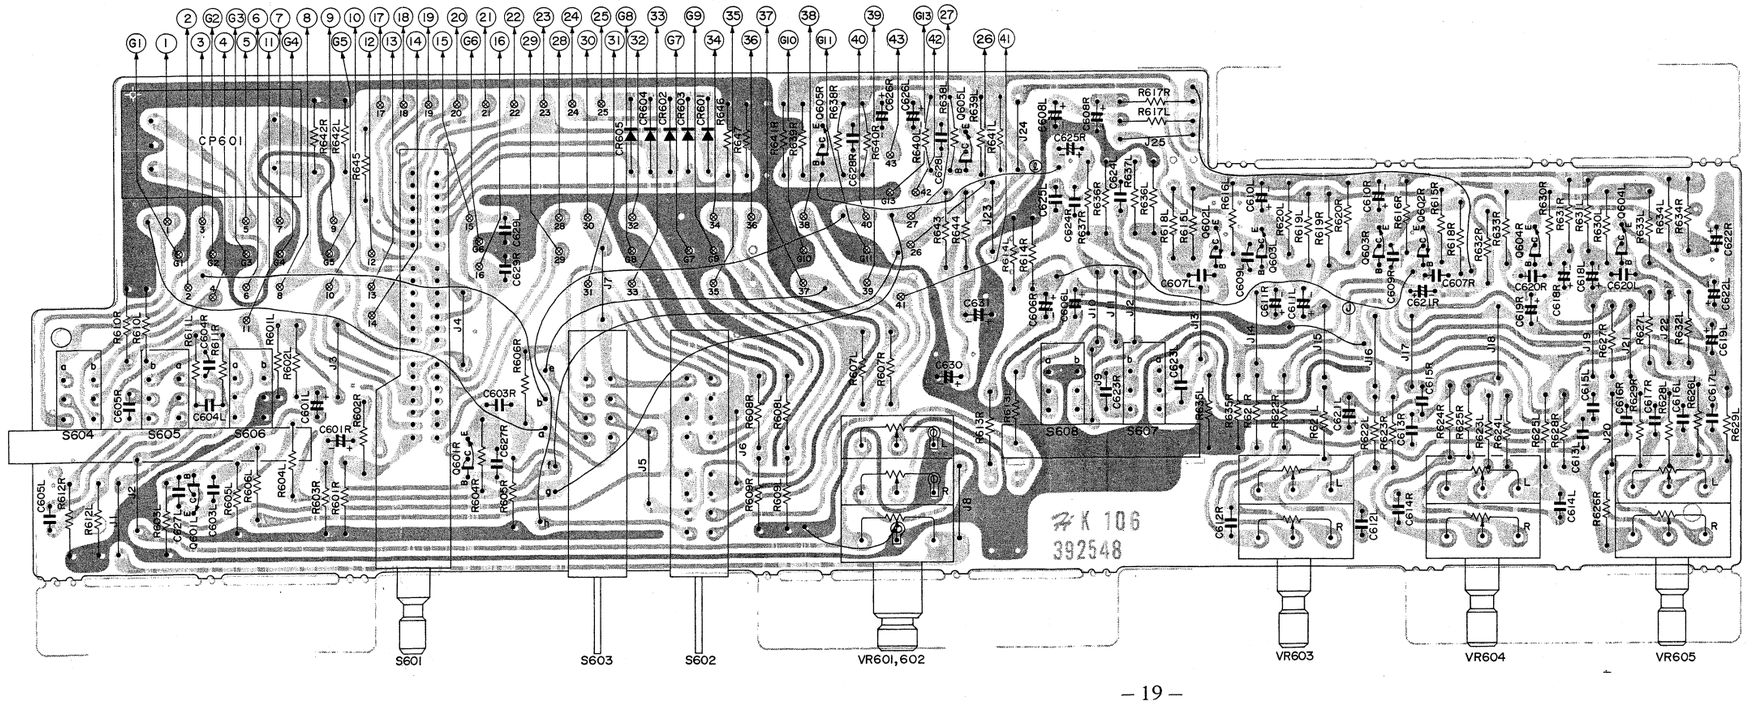

MV-5W



CW01B

W06C
IS2076
HZ-15
IS2267

ISS62
HZ-1E
IN34A

IN60P



U06C



MV-1Y



S5VB20



SR-903
CIRCUIT DIAGRAM·SCHALTPLAN·PLAN DE CIRCUIT

ALL RESISTANCE VALUES ARE IN OHMS(Ω).
ALL CAPACITANCE VALUES ARE IN FARAD(F).

TUNER CIRCUIT DIAGRAM

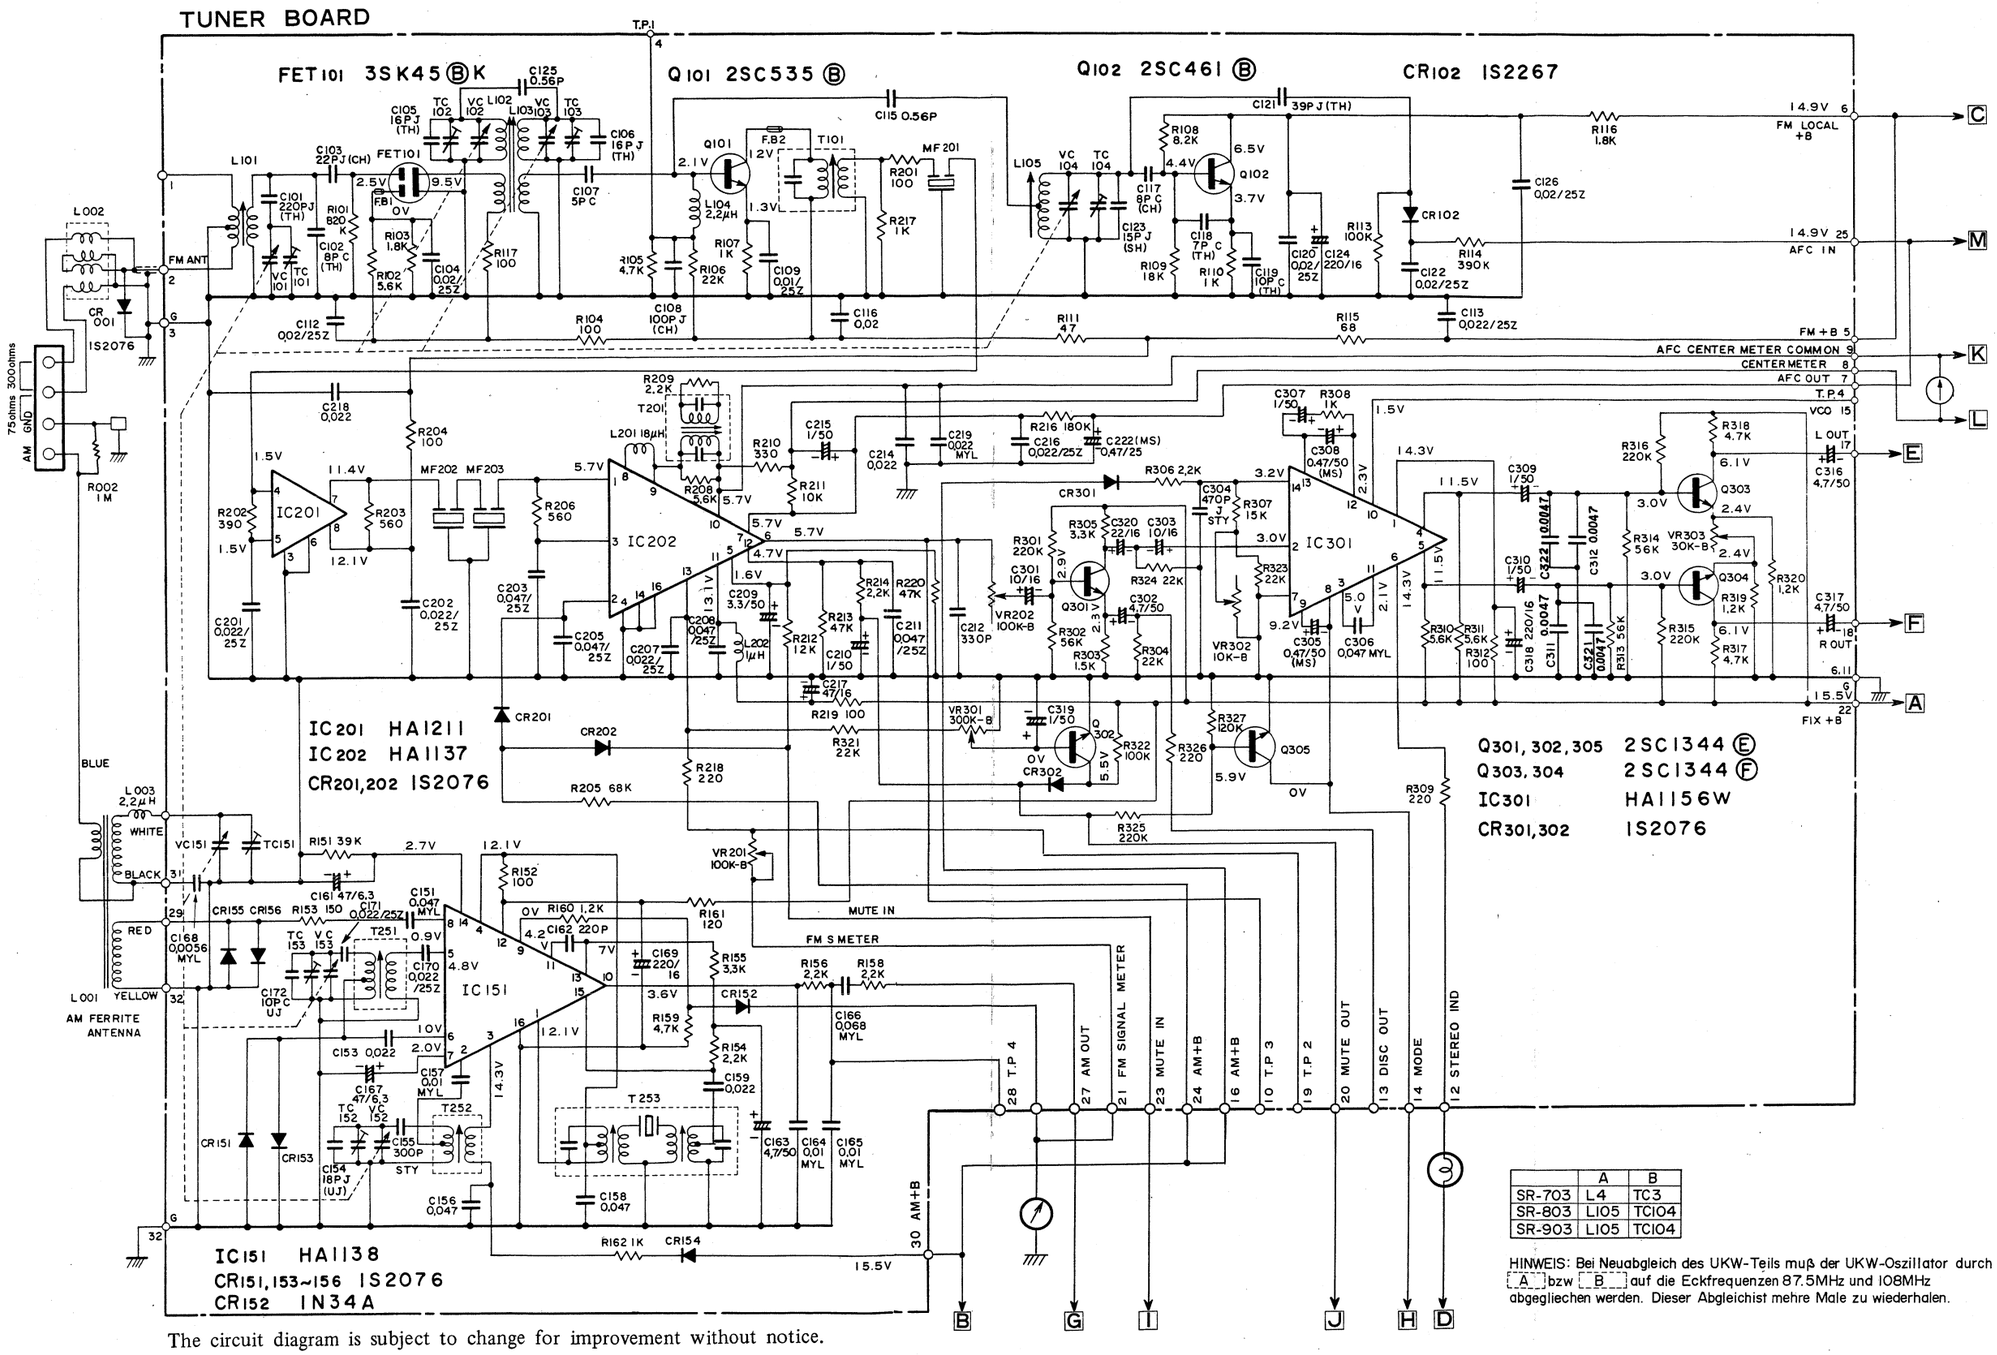

	A	B
SR-703	L4	TC3
SR-803	L105	TC104
SR-903	L105	TC104

HINWEIS: Bei Neuabgleich des UKW-Teils muß der UKW-Oszillator durch [A] bzw [B] auf die Eckfrequenzen 87.5MHz und 108MHz abgegliechen werden. Dieser Abgleichist mehre Male zu wiederhalen.

The circuit diagram is subject to change for improvement without notice.

SR-903
AUDIO CIRCUIT DIAGRAM

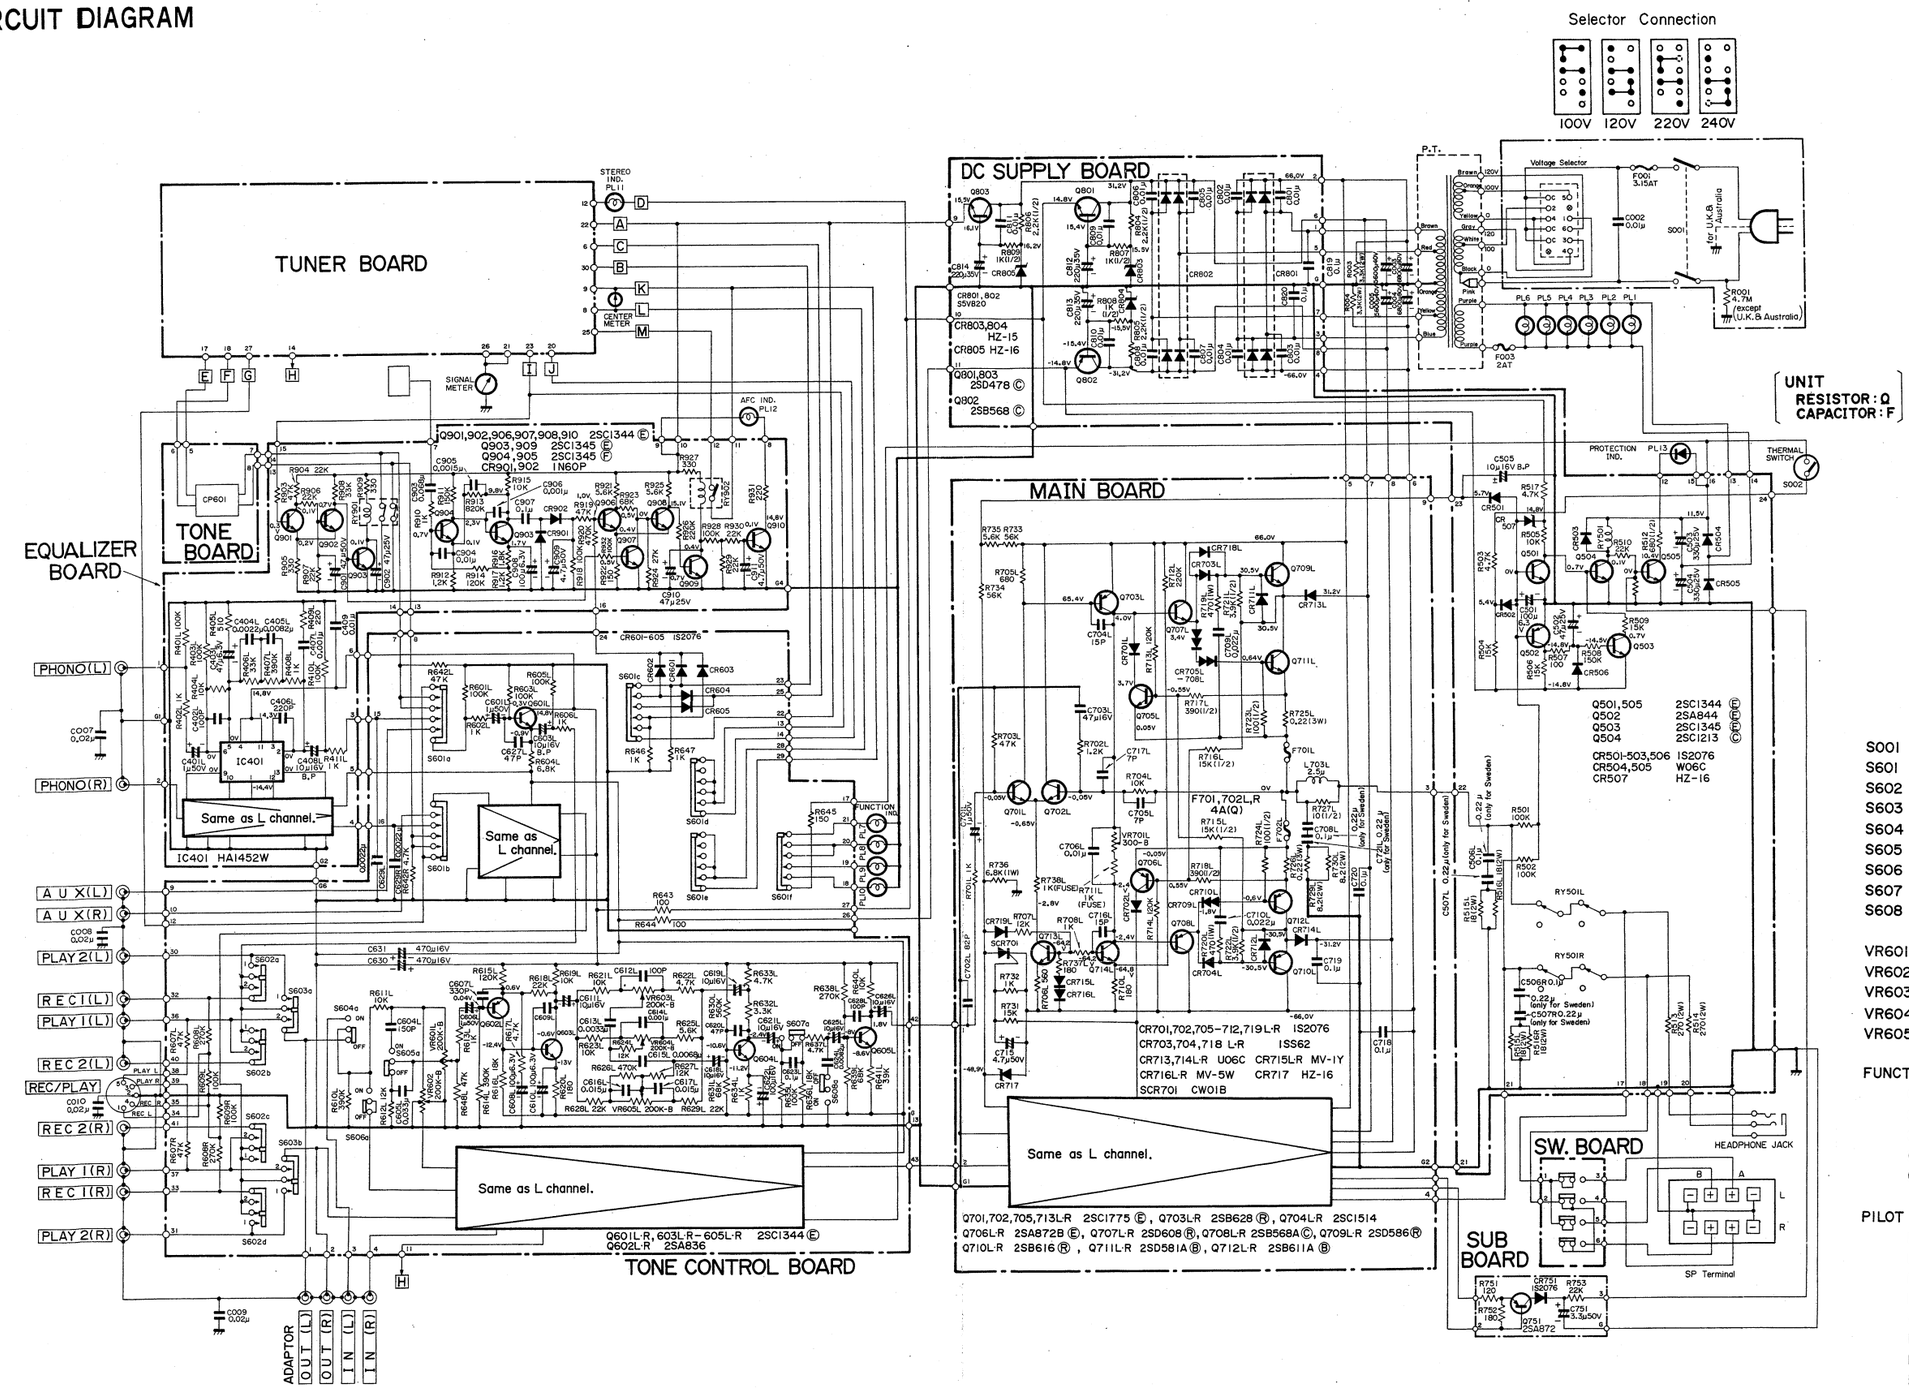

S001 POWER SW.
S601 FUNCTION SW.
S602 TAPE COPY SW.
S603 TAPE MONITOR SW.
S604 ADAPTOR SW.
S605 LOUDNESS SW.
S606 MODE SW.
S607 LOW FILTER SW.
S608 HIGH FILTER SW.

VR601 MAIN VOLUME
VR602 BALANCER VOLUME
VR603 TREBLE VOLUME
VR604 MIDRANGE VOLUME
VR605 BASS VOLUME

FUNCTION
① AM
② FM
③ FM MUTE / AUTO LOCK
④ PHONO
⑤ AUX

PILOT LAMP
PL1-6 DIAL ILLUMINATION
PL7 FUNCTION AM
PL8 FUNCTION FM
PL9 FUNCTION PHONO
PL10 FUNCTION AUX
PL11 STEREO INDICATOR
PL12 AUTO LOCK INDICATOR
PL13 PROTECTION INDICATOR

HITACHI SR-903·803·703

SR-803

PRINTED WIRING BOARD·PRINTPLATTEN·PLAN DE BASE

TUNER PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

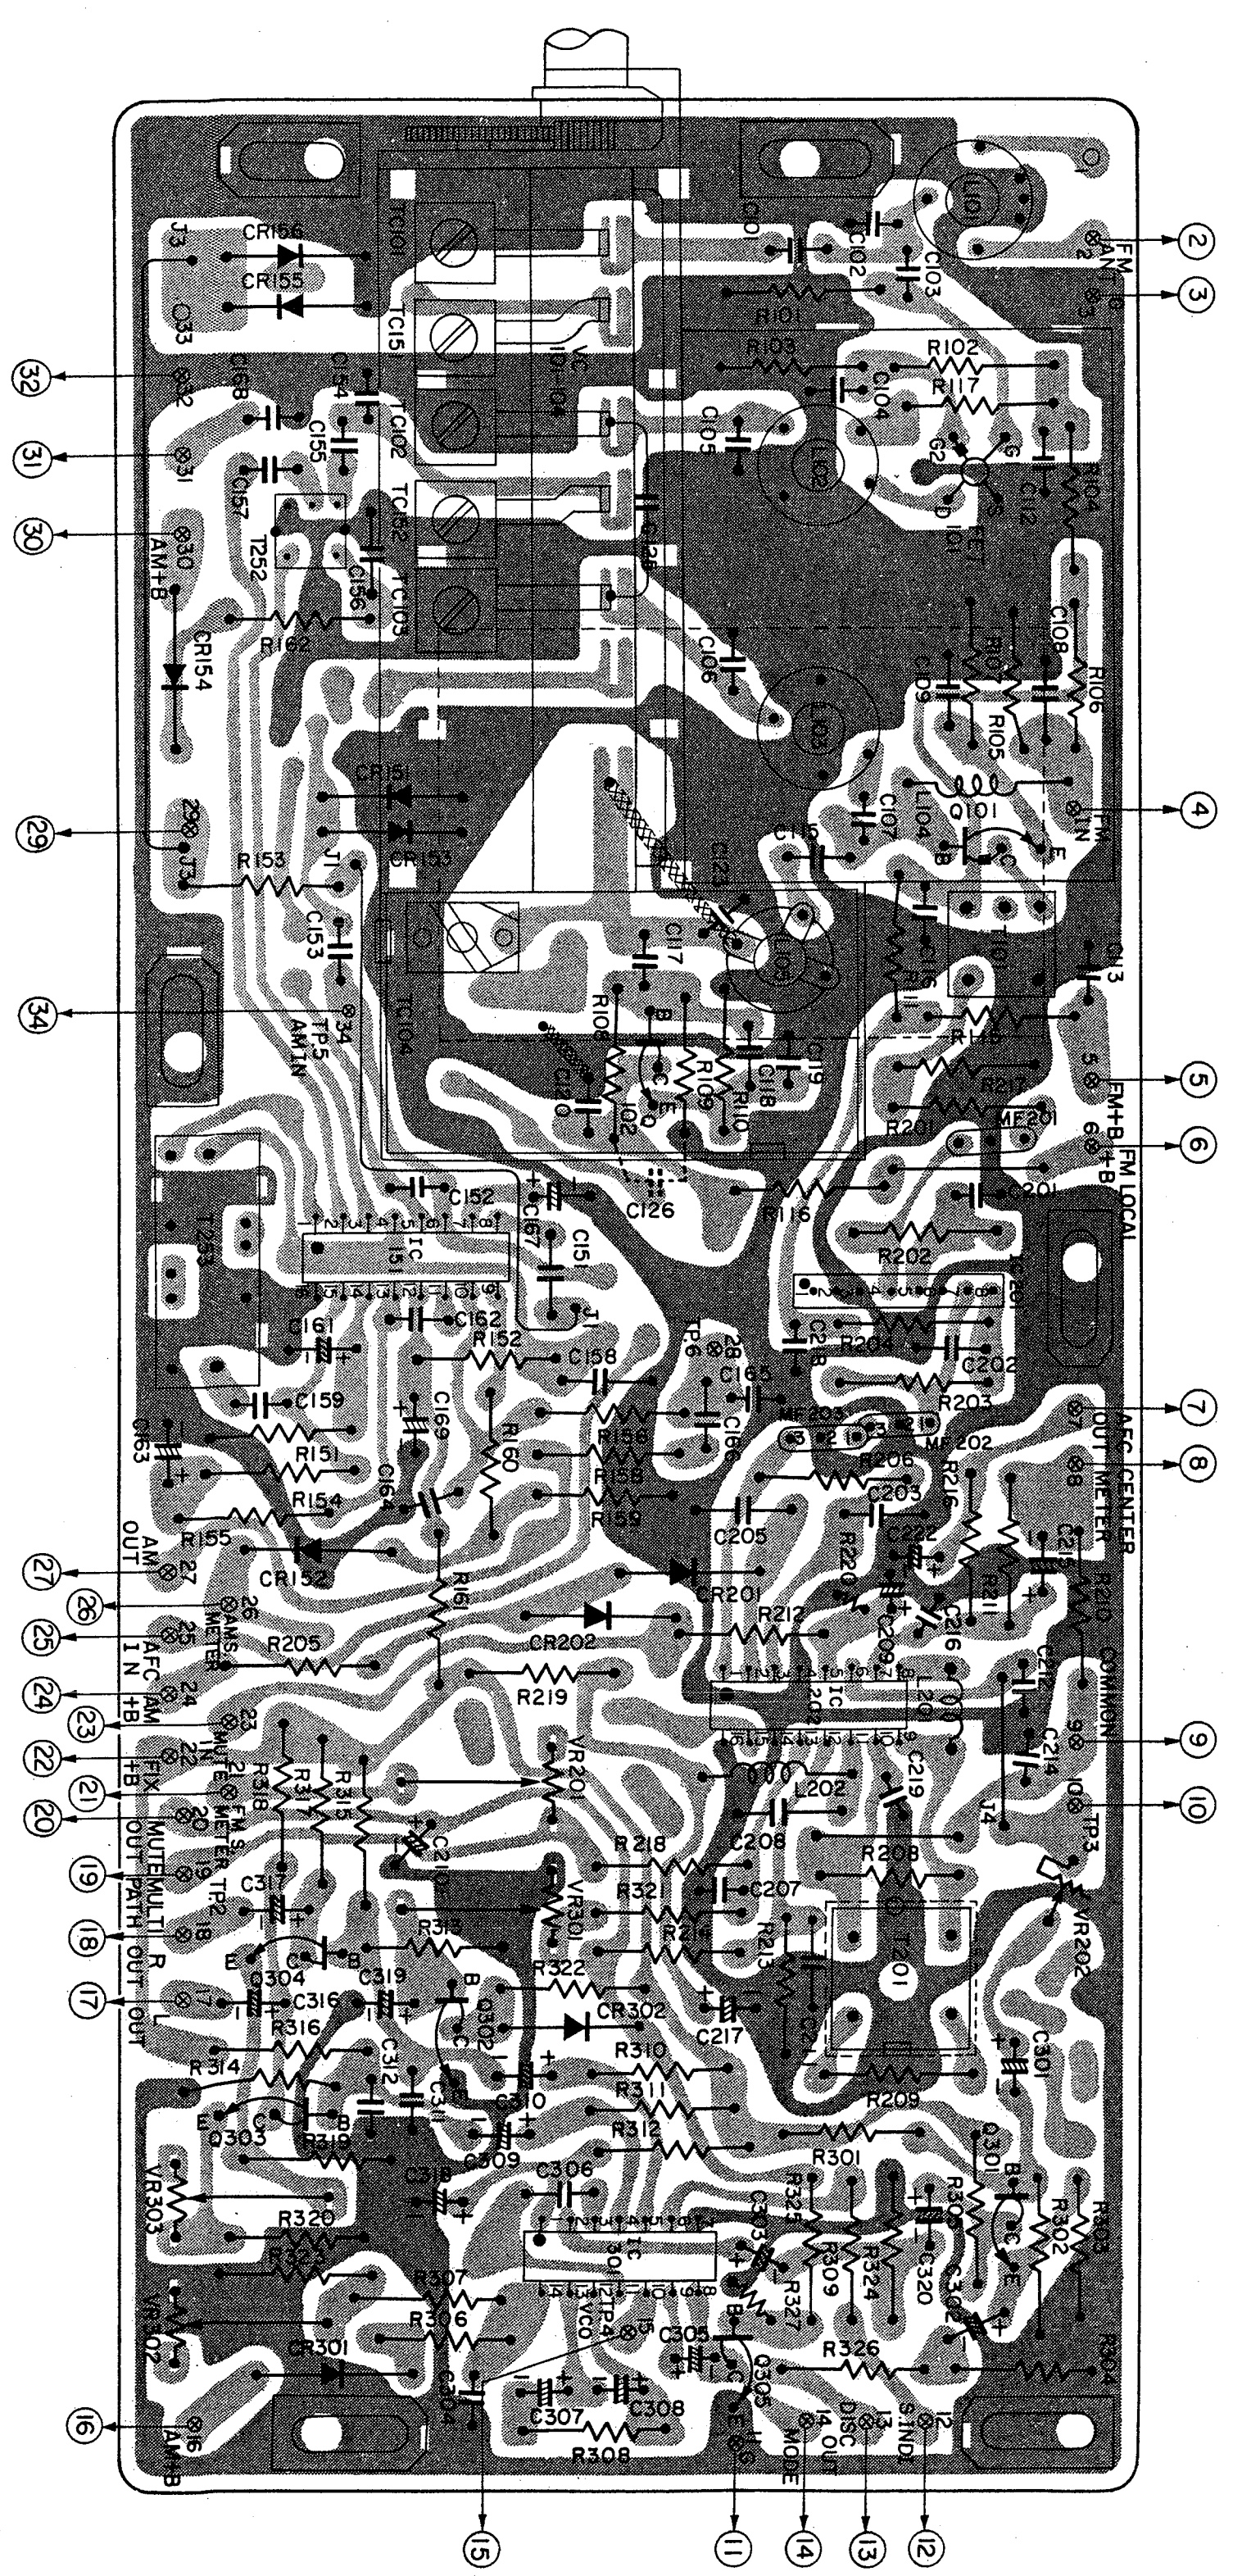

EQUALIZR PRINTED WIRING BOARD

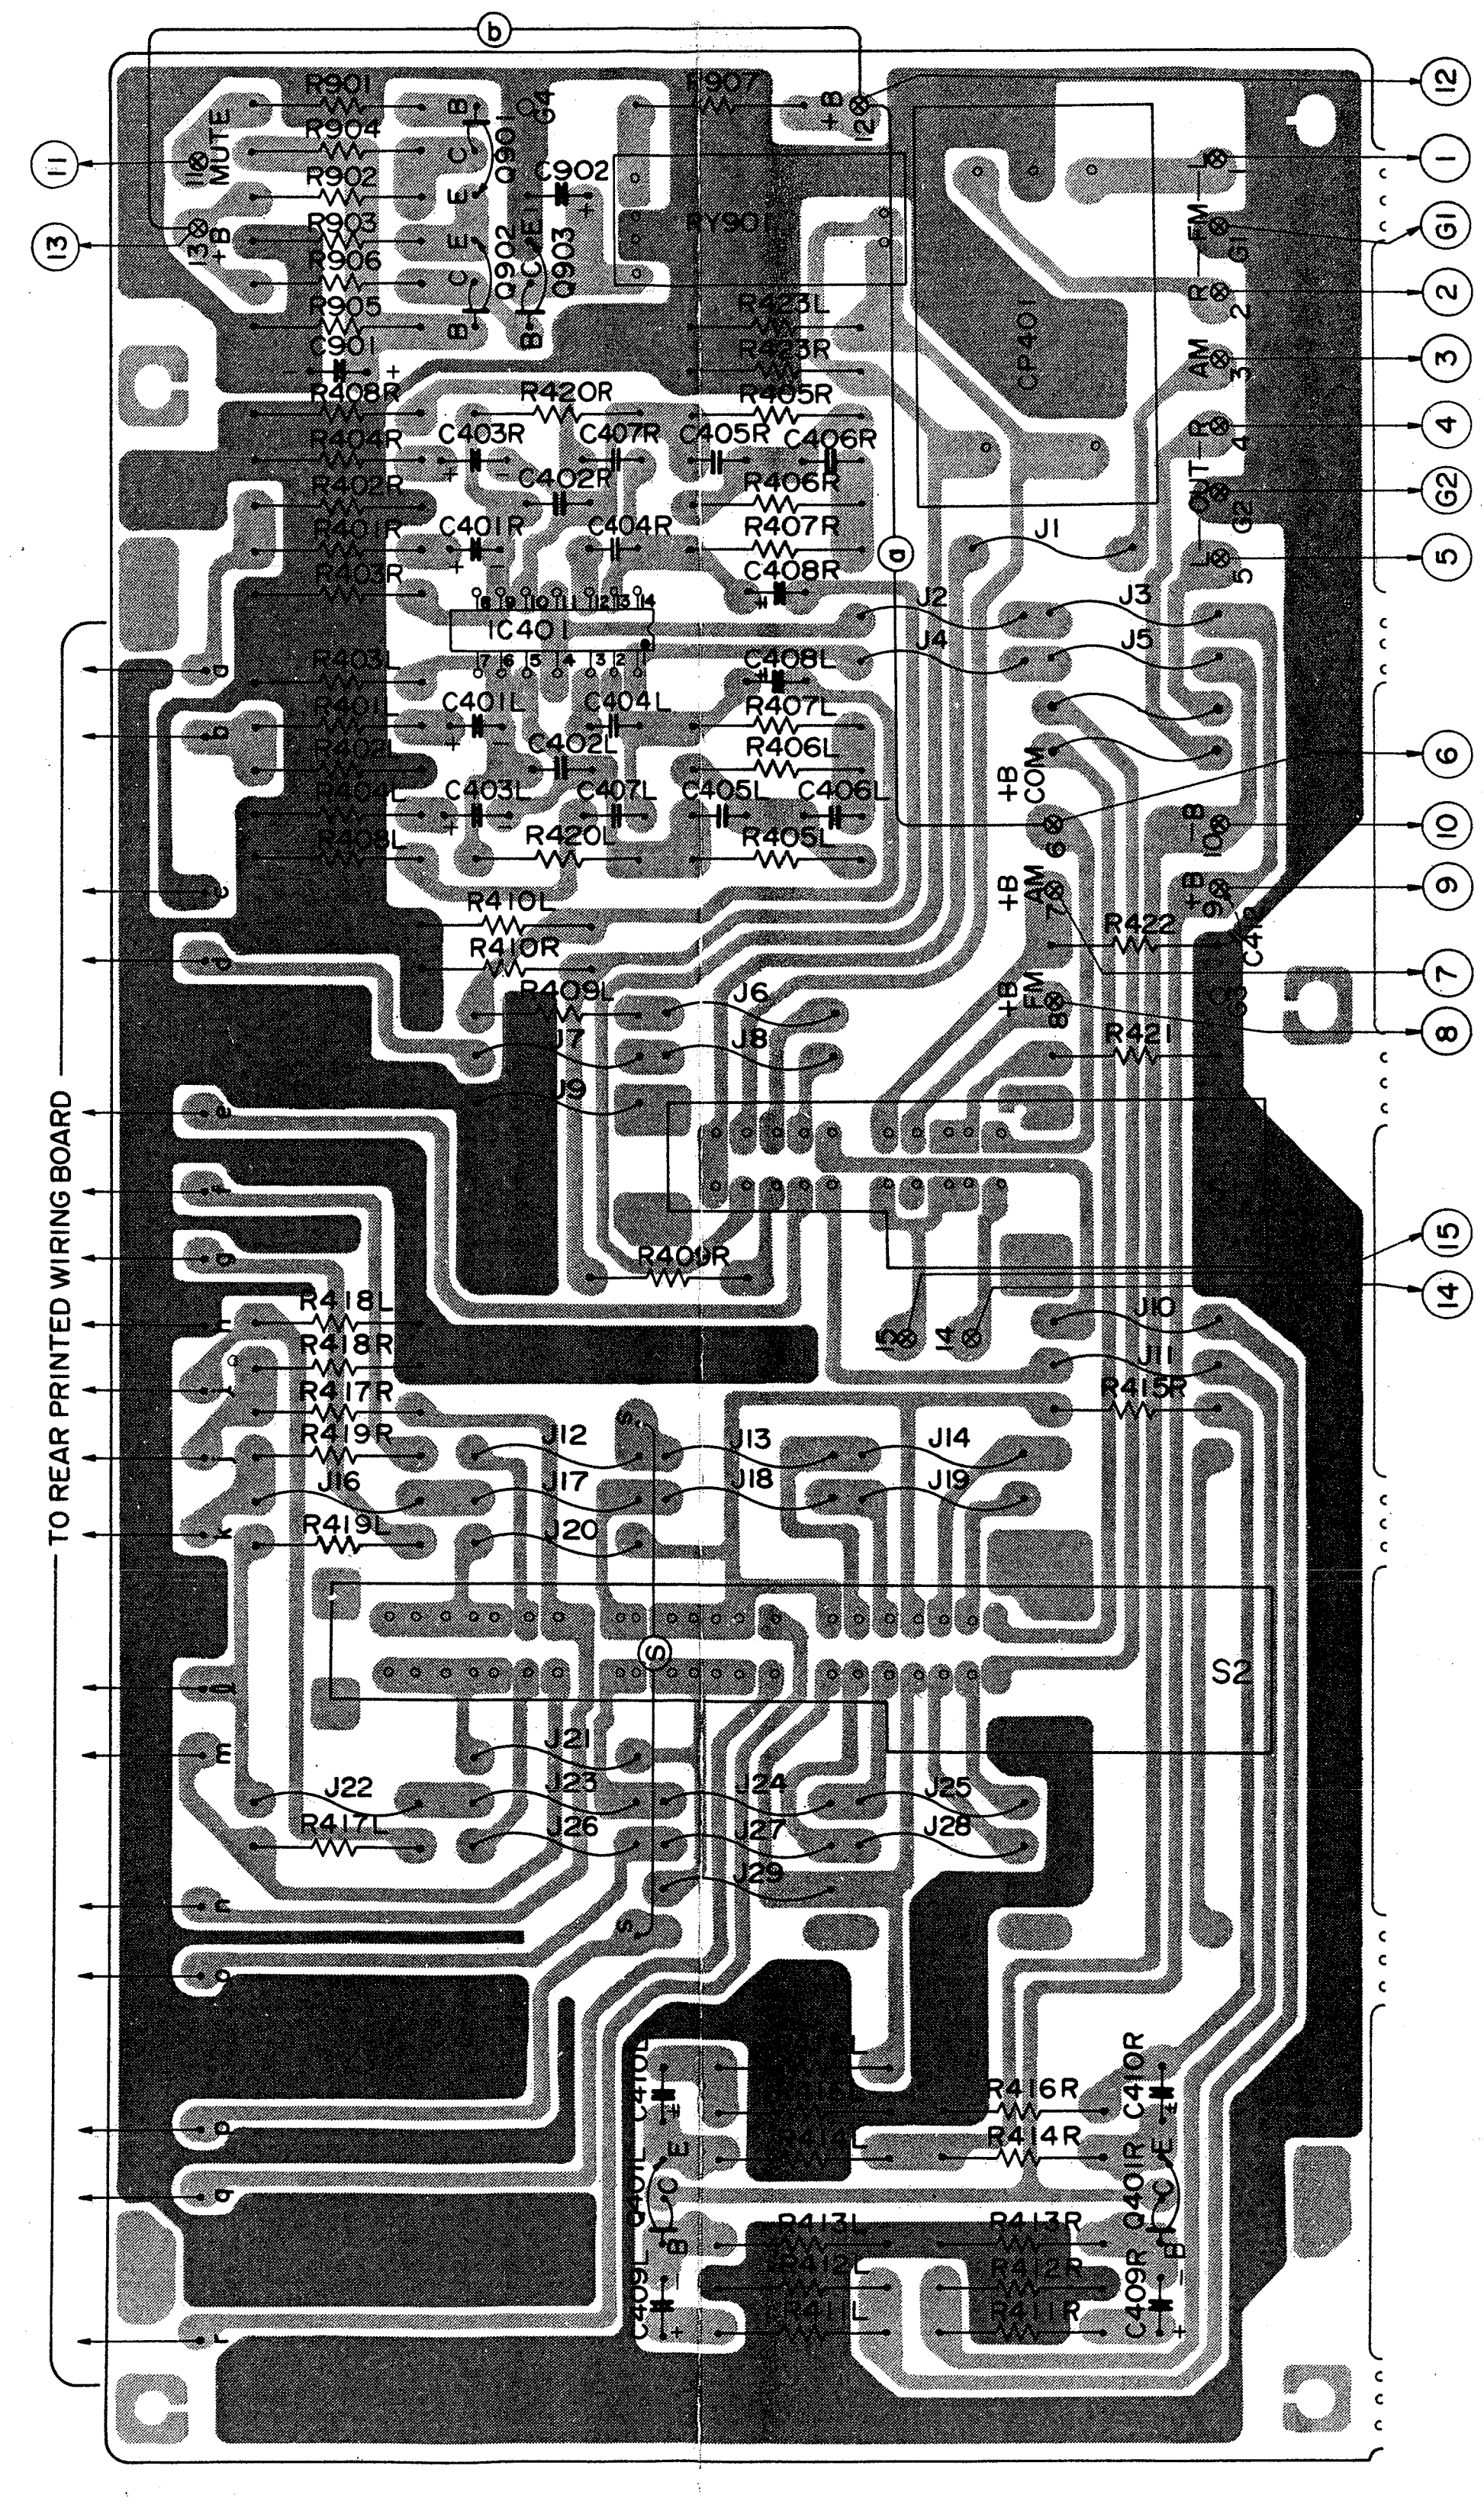

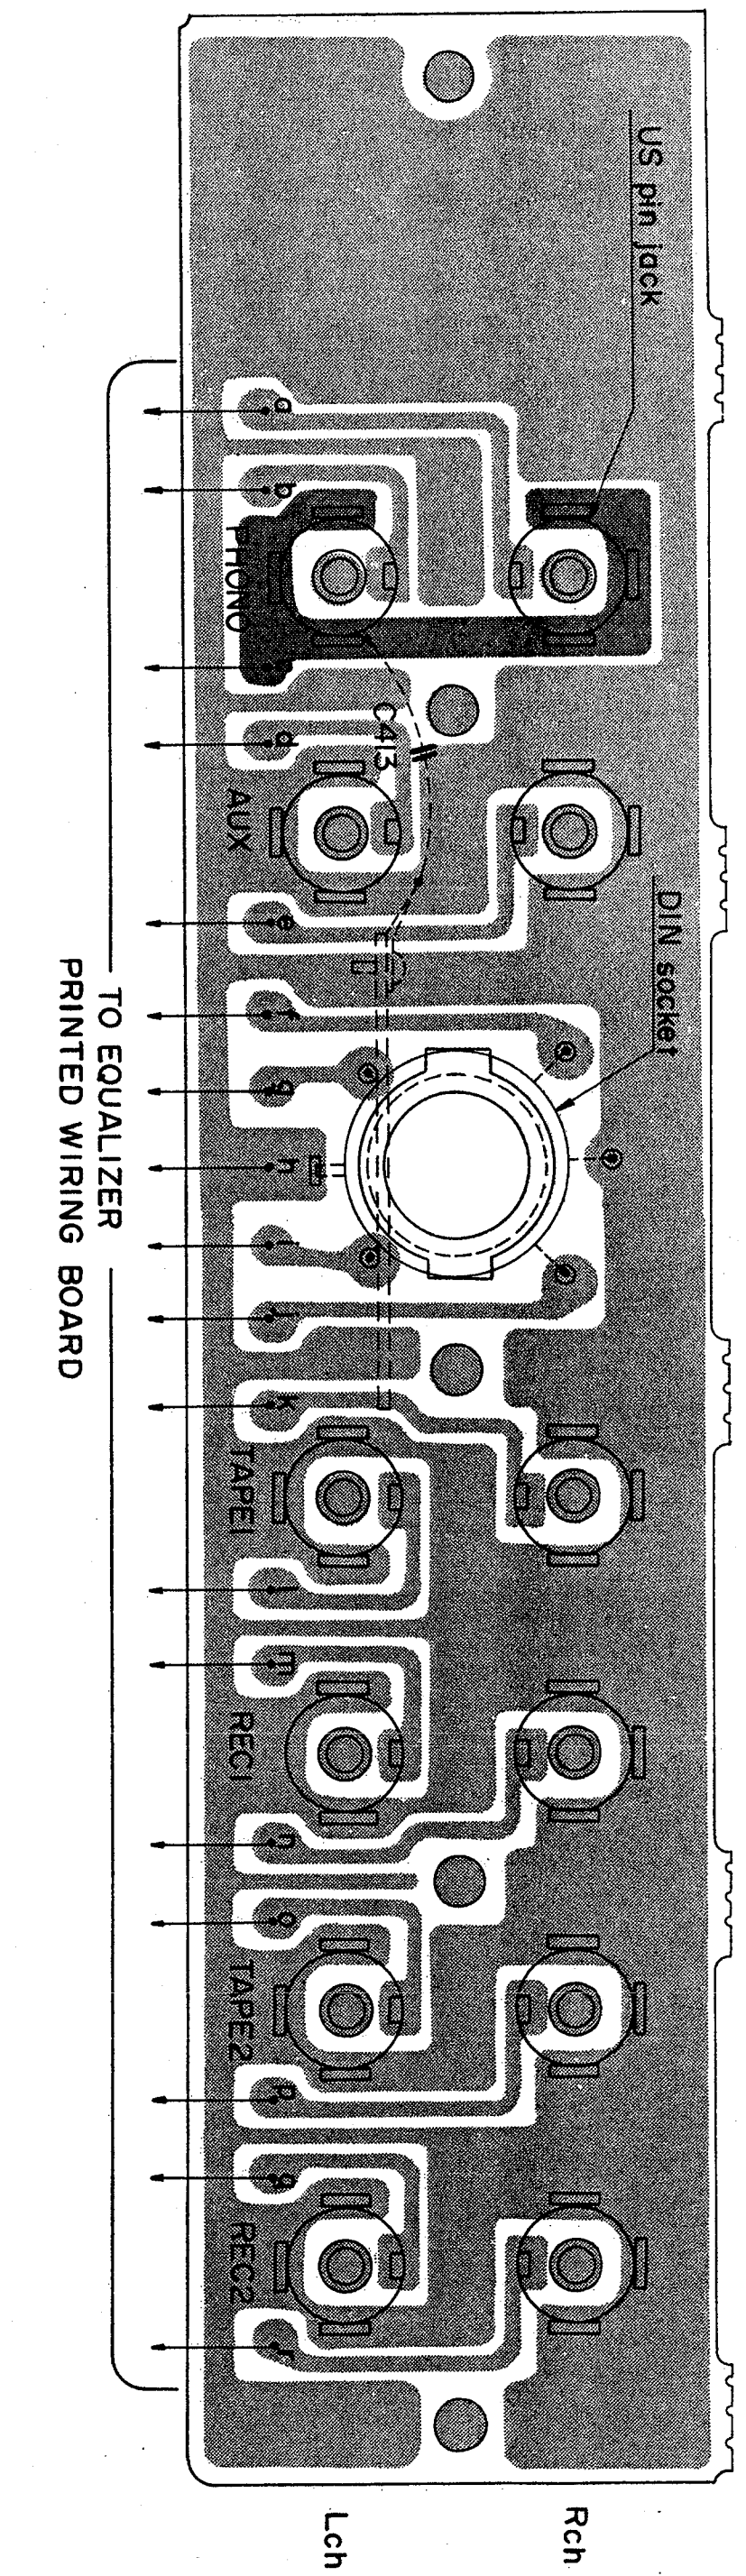

SR-803

MAIN PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

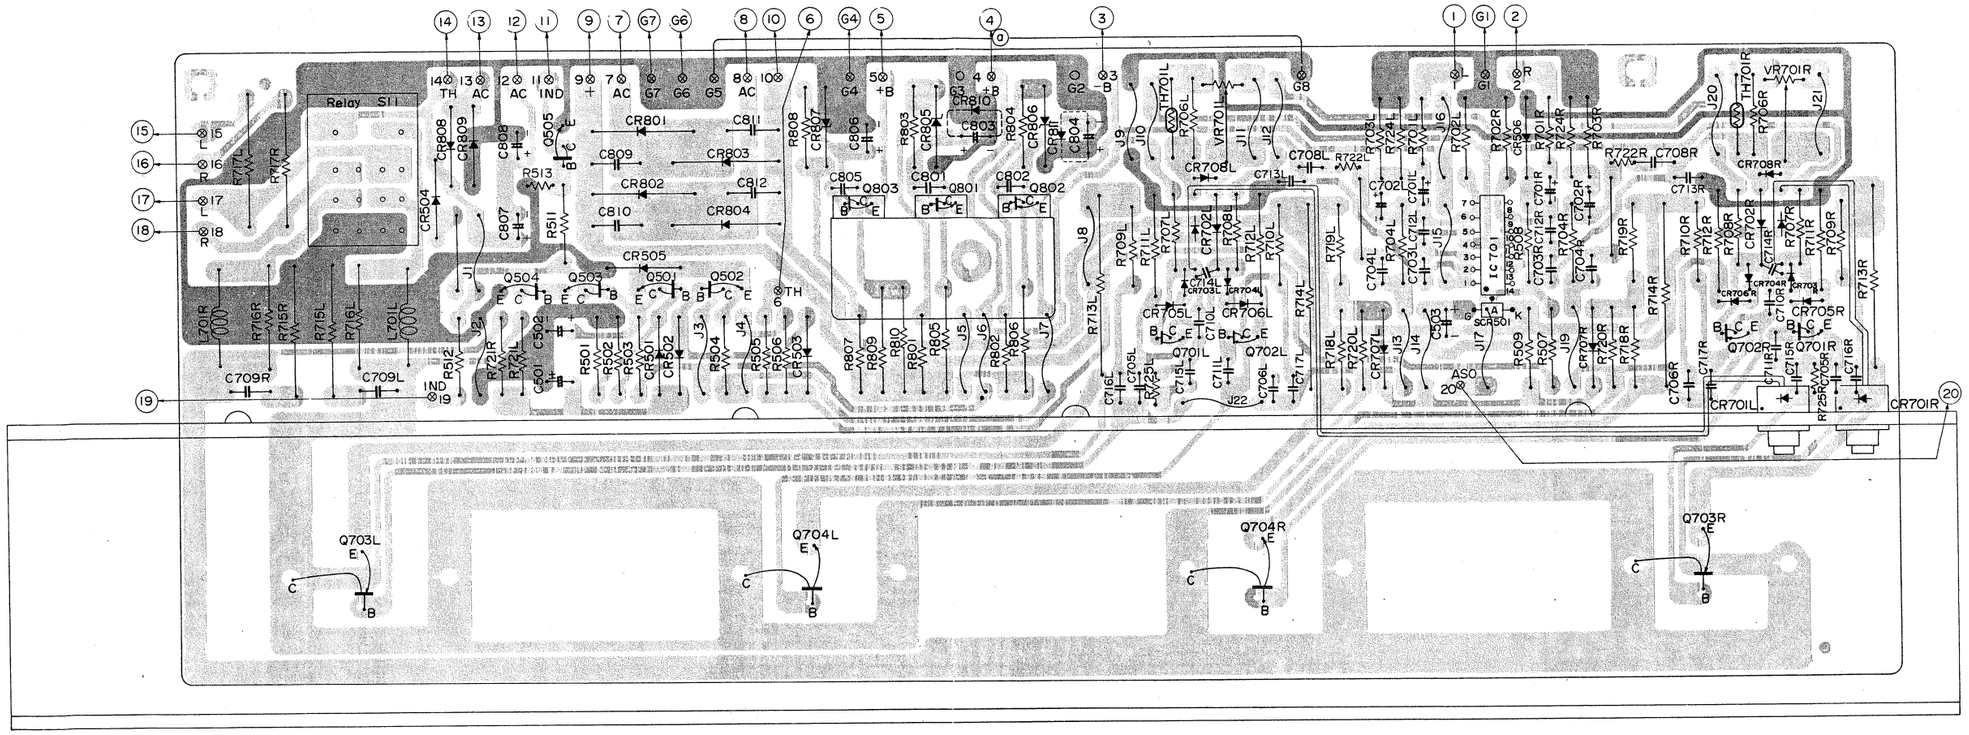

PRE-TONE PRINTED WIRING BOARD

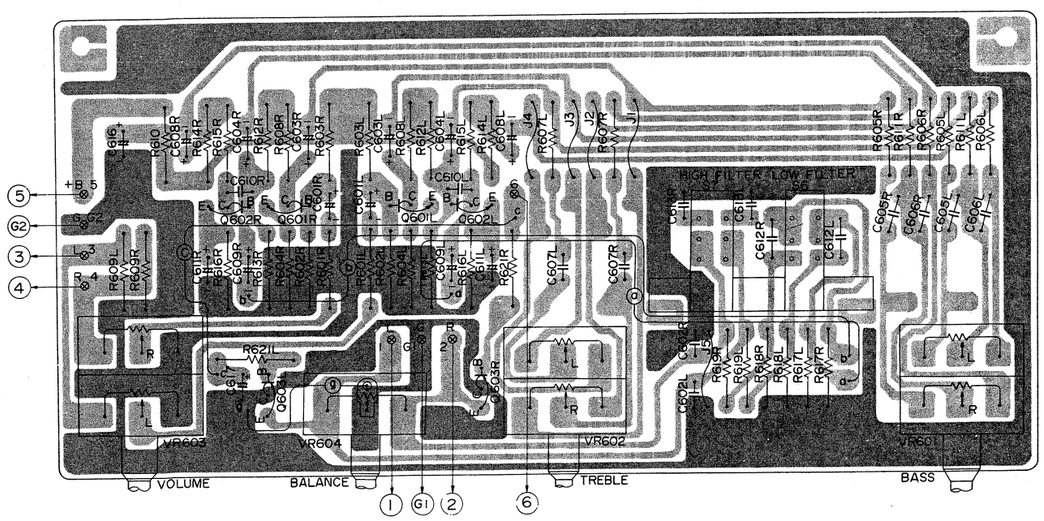

SWITCH PRINTED WIRING BOARD

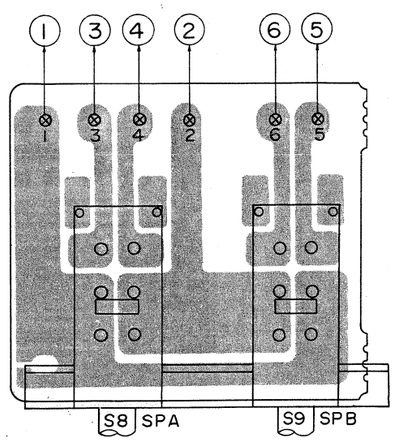

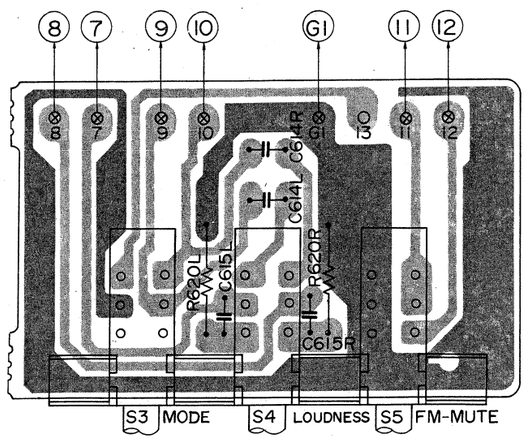

SR-803

CIRCUIT DIAGRAM·SCHALTPLAN·PLAN DE CIRCUIT

TUNER CIRCUIT DIAGRAM

The circuit diagram is subject to change for improvement without notice.

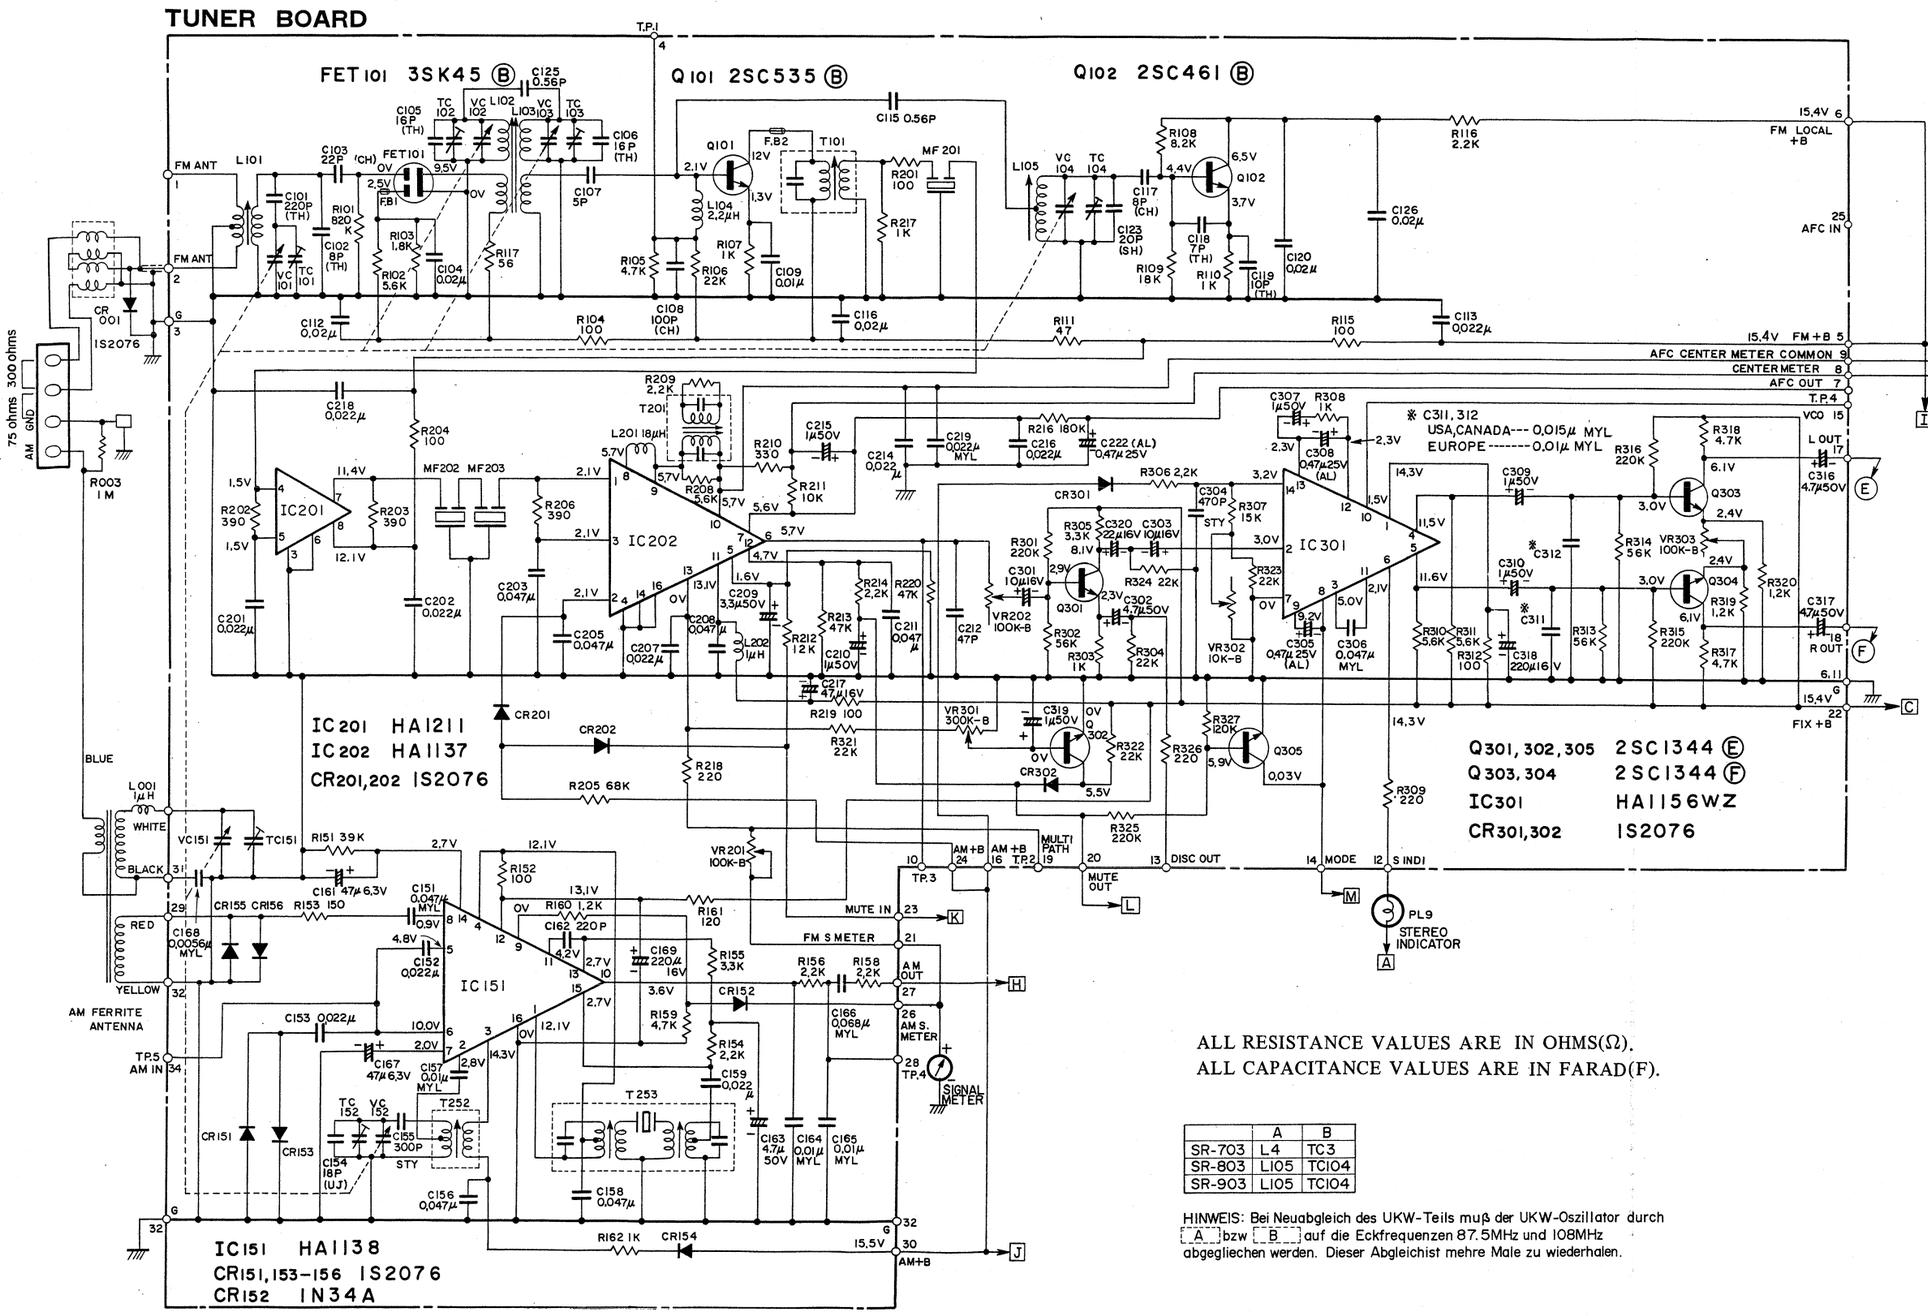

ALL RESISTANCE VALUES ARE IN OHMS(Ω).
ALL CAPACITANCE VALUES ARE IN FARAD(F).

	A	B
SR-703	L4	TC3
SR-803	L105	TC104
SR-903	L105	TC104

HINWEIS: Bei Neuabgleich des UKW-Teils muß der UKW-Oszillator durch [A] bzw [B] auf die Eckfrequenzen 87.5MHz und 108MHz abgeglichen werden. Dieser Abgleichist mehre Male zu wiederholen.

SR-803
AUDIO CIRCUIT DIAGRAM

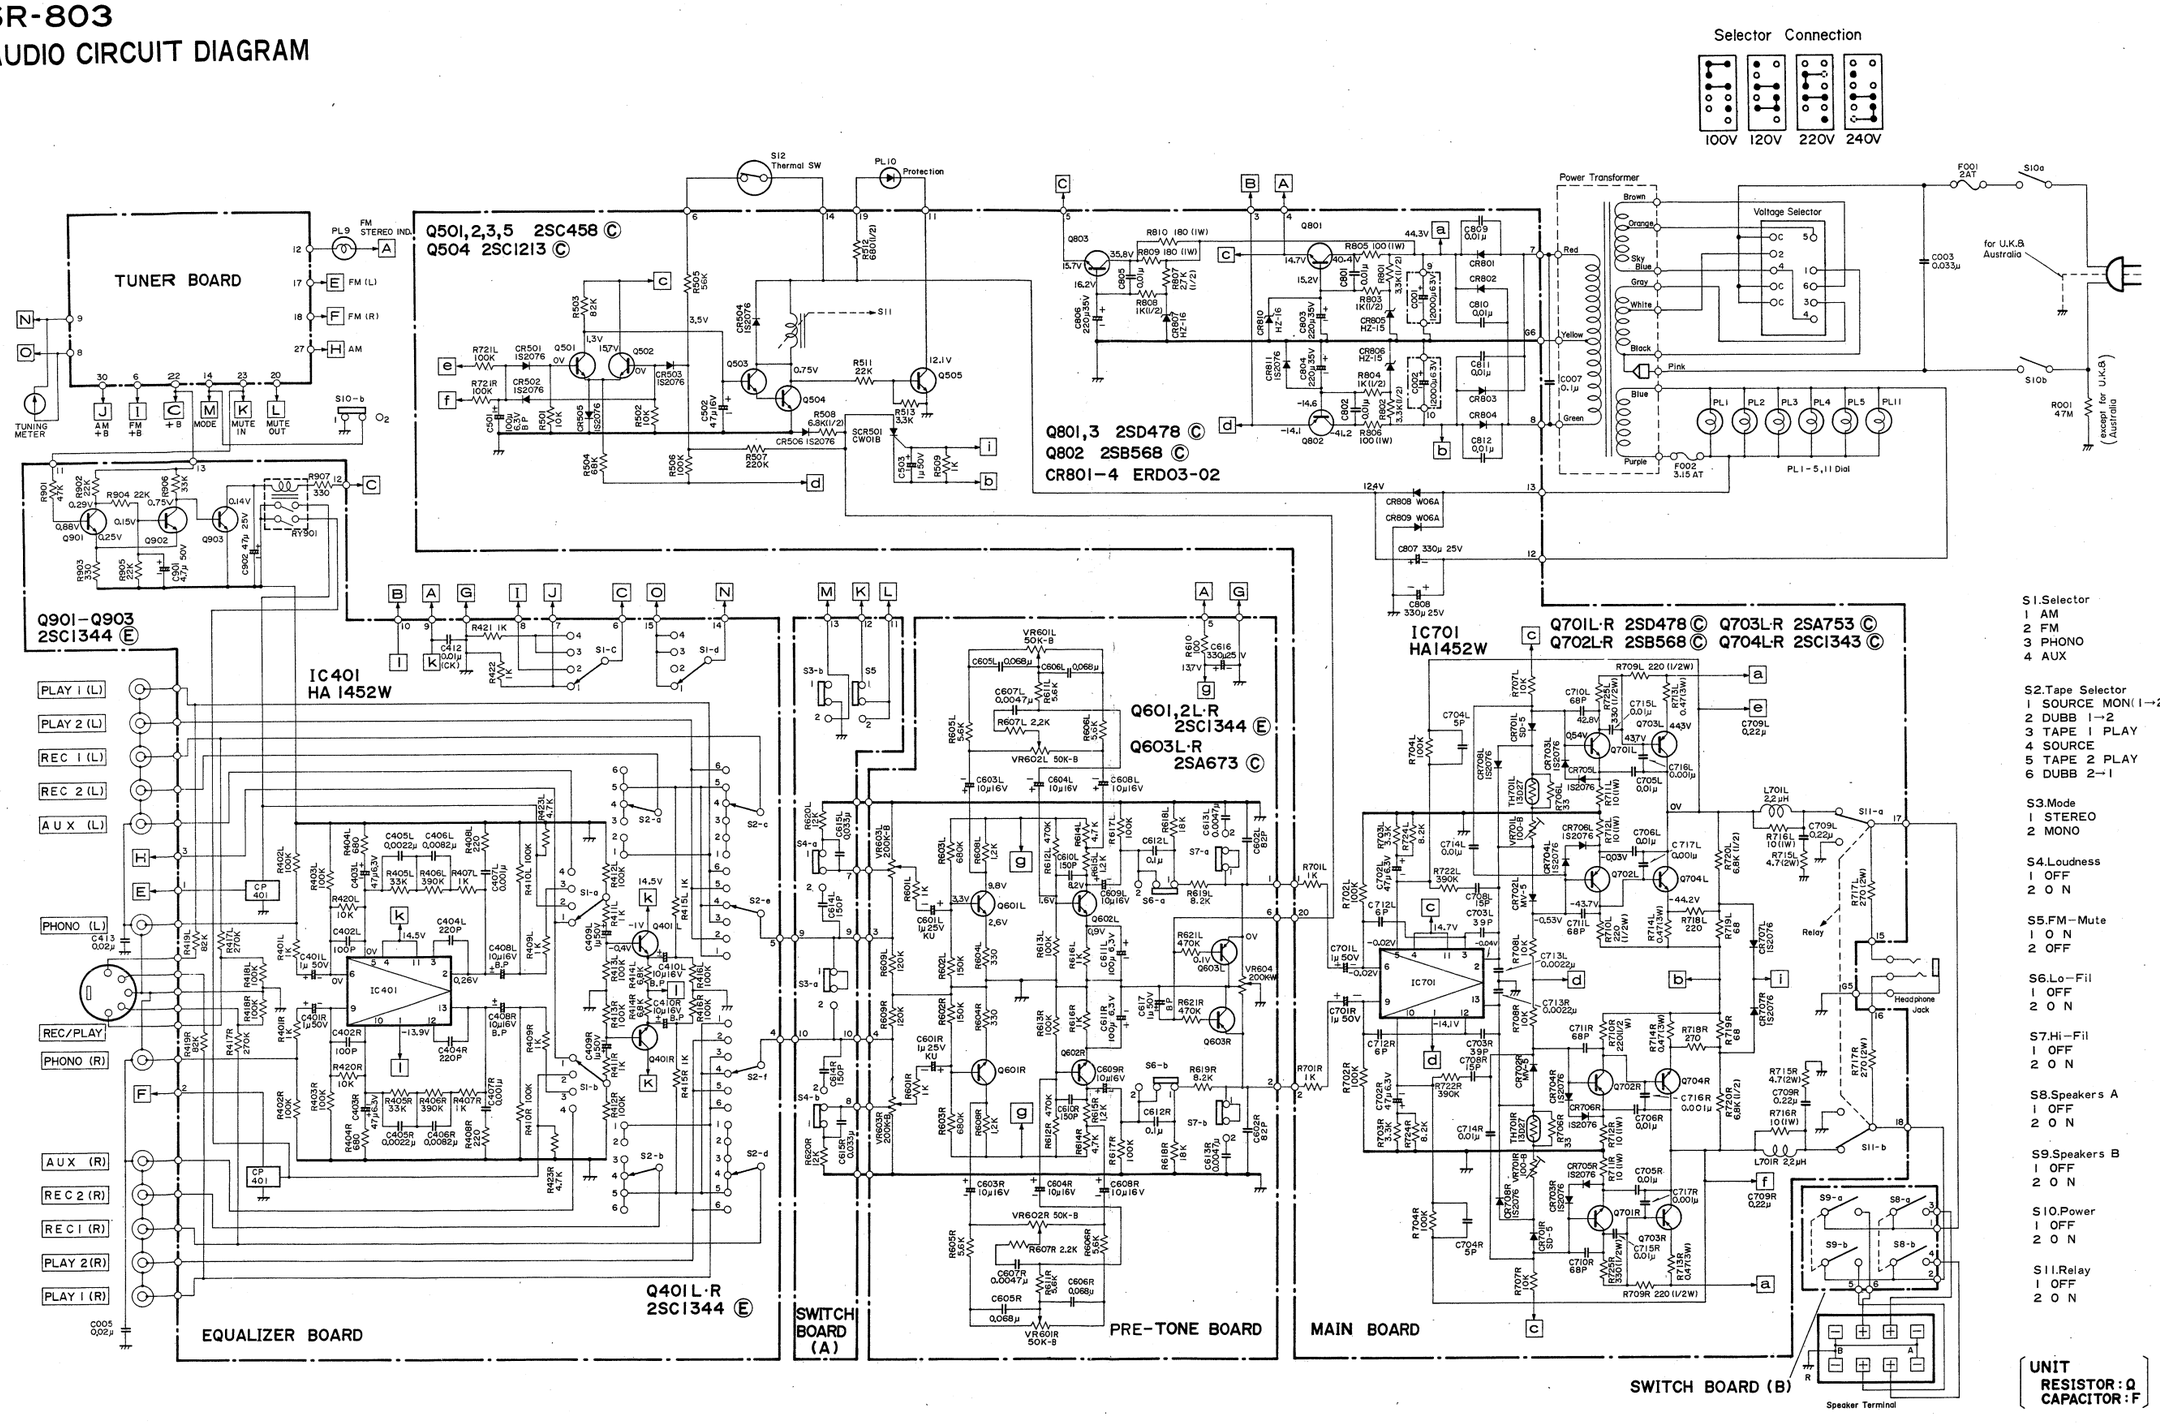

SR-703

PRINTED WIRING BOARD·PRINTPLATTEN·PLAN DE BASES

TUNER PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board. This number matches the number in the circuit diagram.

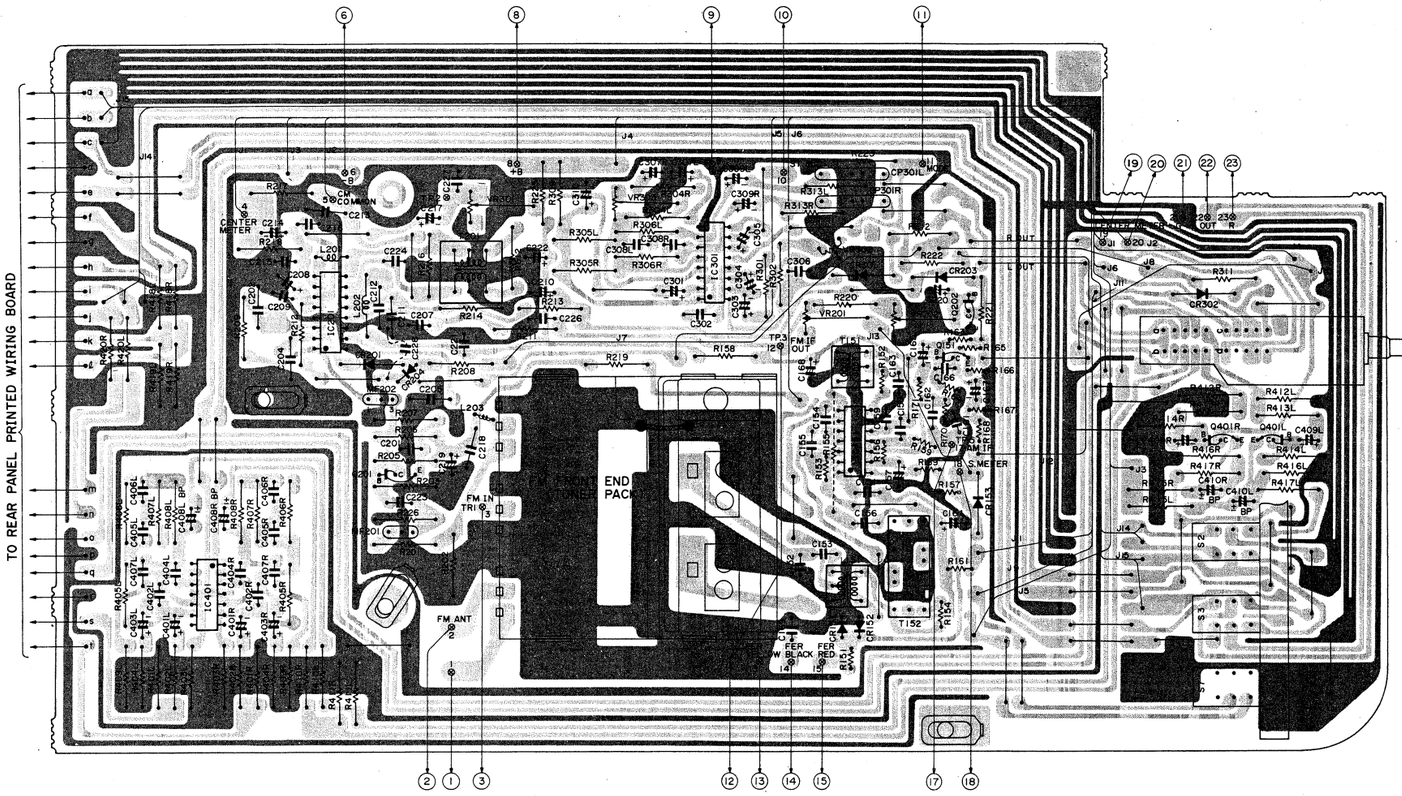

2SC1344
2SC460



HA1137
HA1196



HA1151
HA1452W

REAR PRINTED WIRING BOARD

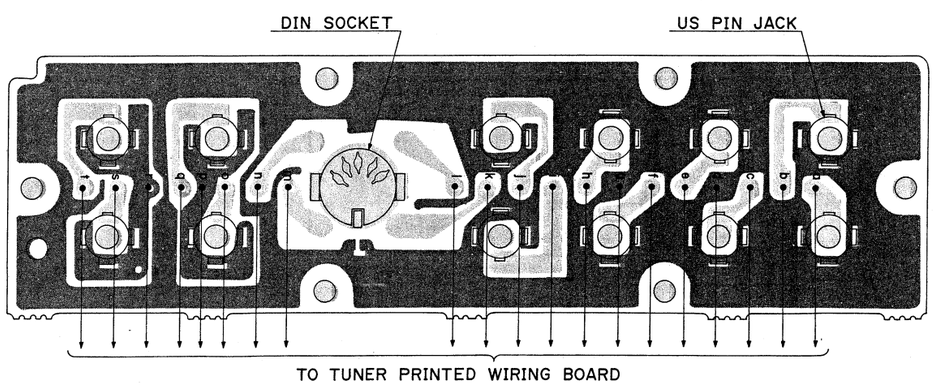

INNER VIEW(HA1196)

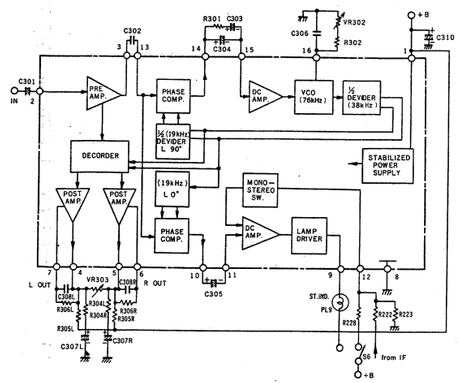

SR-703
AUDIO(A)PRINTED WIRING BOARD

The terminal No. shows the stamp on the printed wiring board.
This number matches the number in the circuit diagram.

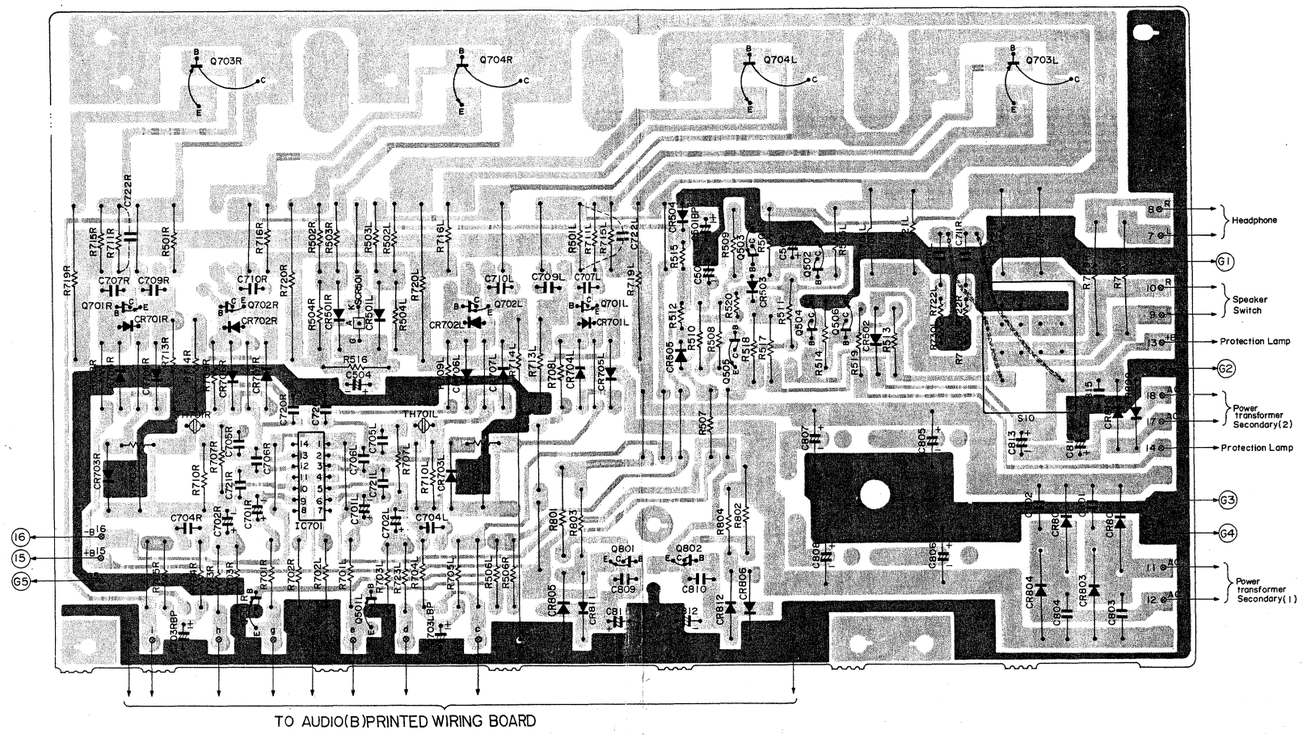

2SC1343
2SA753



HA1452W



2SC1344
2SA836
2SC1213
2SC458



CW01B



2SD478
2SB568

AUDIO(B)PRINTED WIRING BOARD

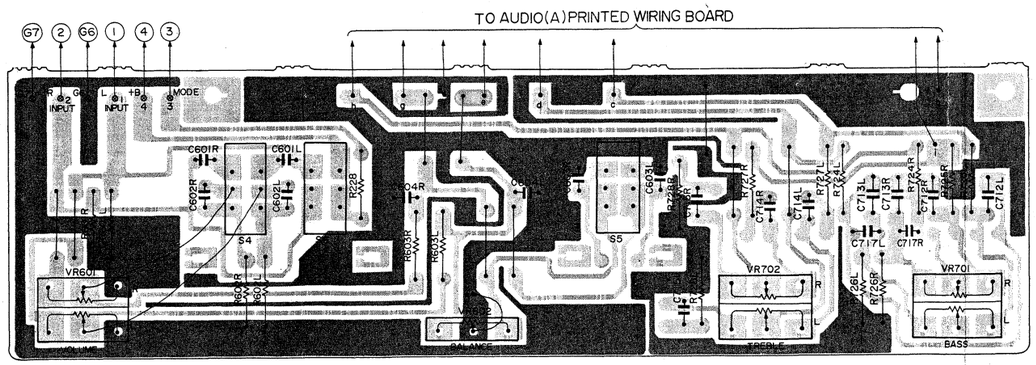

SWITCH PRINTED WIRING BOARD

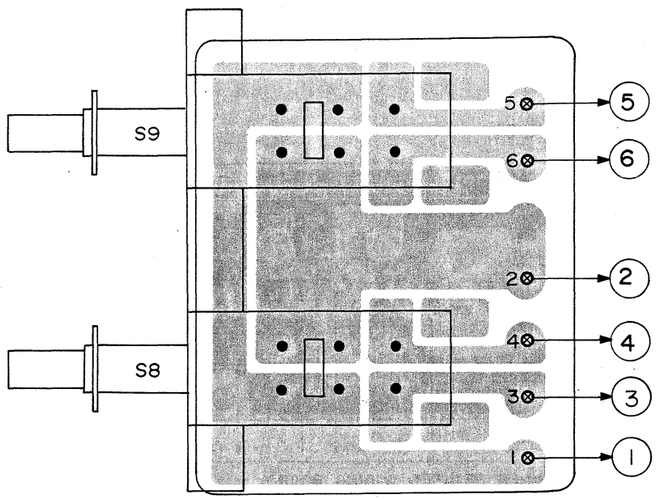

SR-703

CIRCUIT DIAGRAM·SCHALTPLAN·PLAN DE CIRCUIT

The circuit diagram is subject to change for improvement without notice.

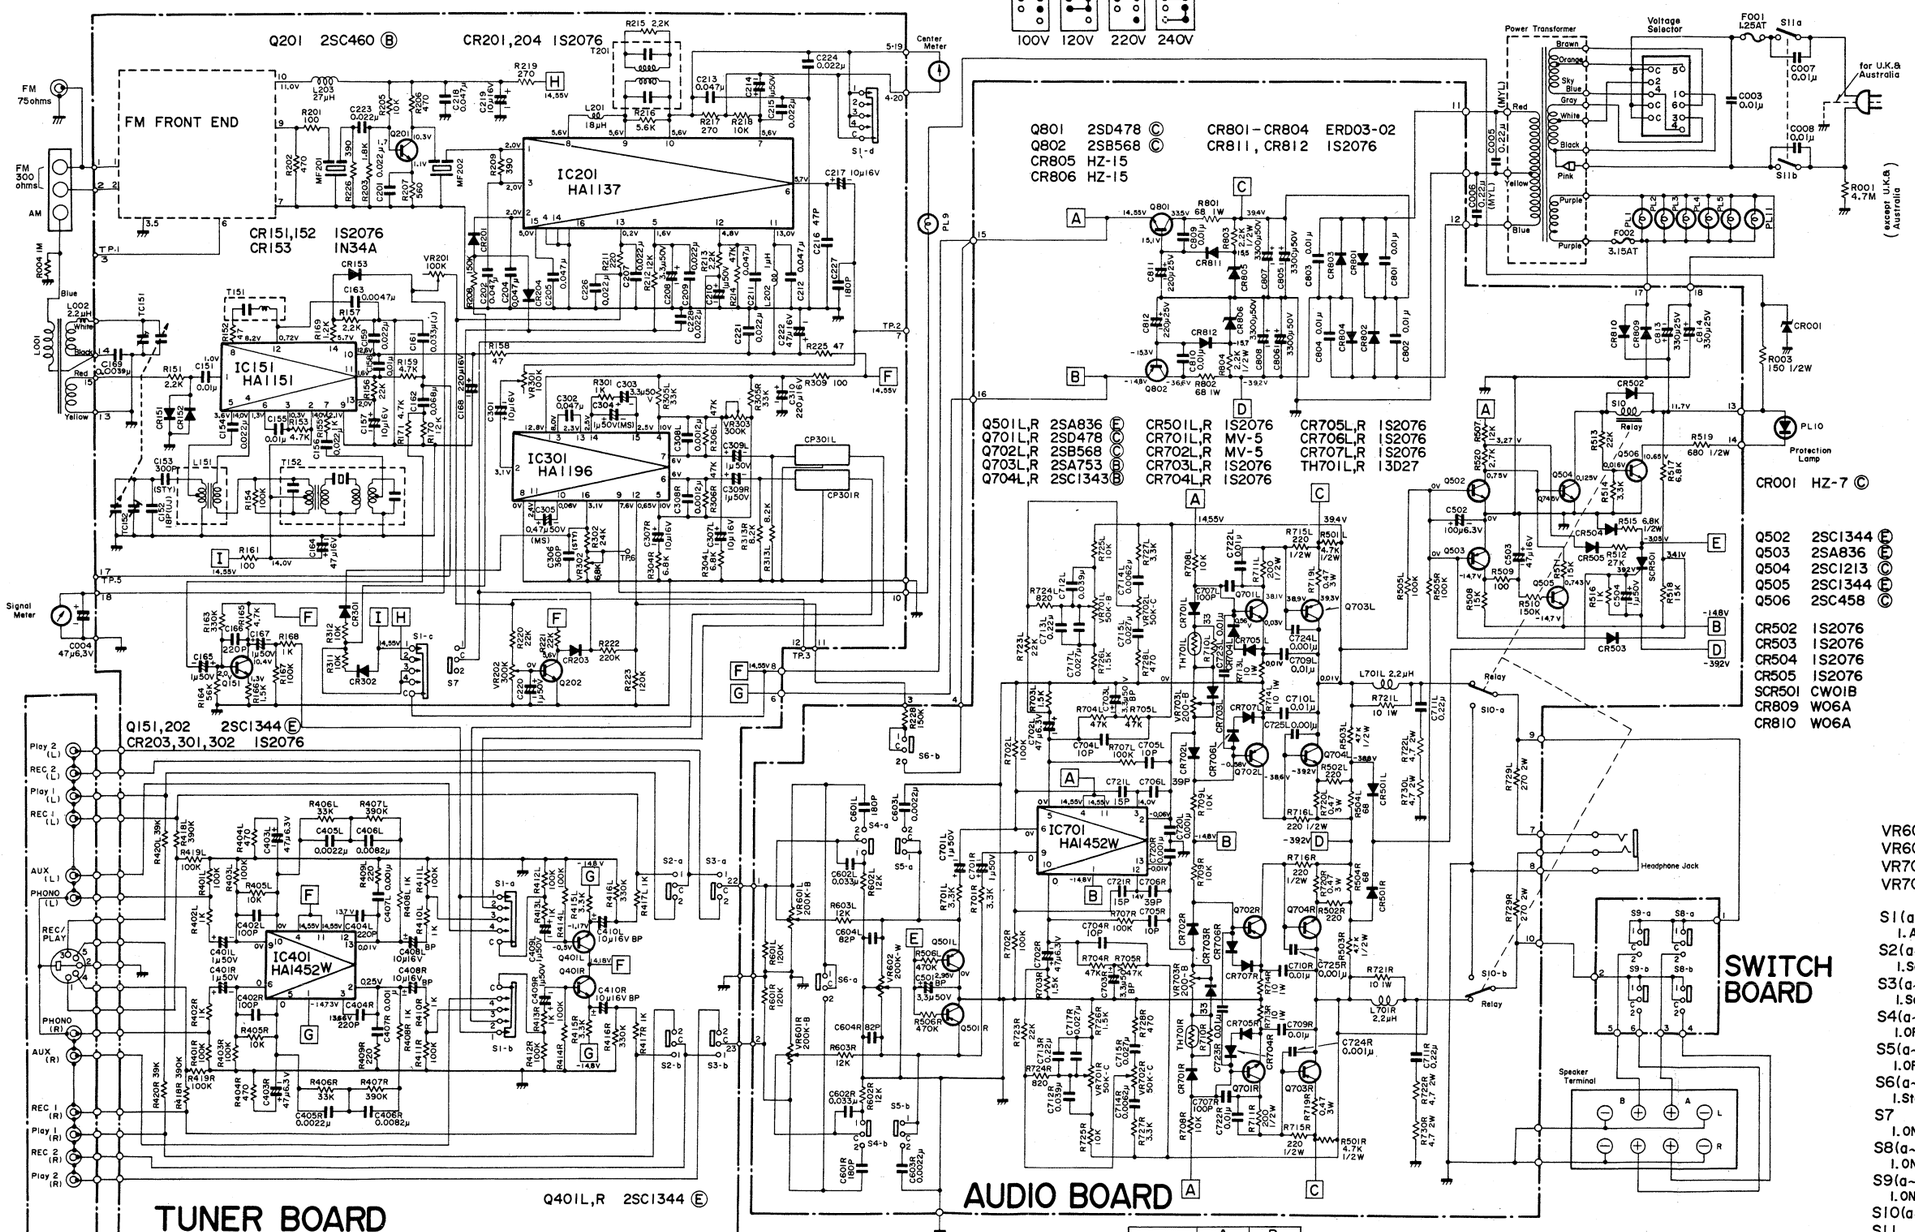

	A	B
SR-703	L4	TC3
SR-803	L105	TC104
SR-903	L105	TC104

HINWEIS: Bei Neuabgleich des UKW-Teils muß der UKW-Oszillator durch [A] bzw [B] auf die Eckfrequenzen 87.5MHz und 108MHz abgegliechen werden. Dieser Abgleichist mehre Male zu wiederhalen.

VR601 : Volume
VR602 : Balance
VR701 : Bass
VR702 : Treble

S1(a~d) : Function
1. AM 2.FM 3.PHONO 4.AUX
S2(a~b) : Tape 1
1.Source 2.Tape 2(Tape 1→ Tape 2)
S3(a~b) : Tape 2
1.Source(Tape 1→ Tape 2) 2.Tape 2
S4(a~b) : Loudness
1.OFF 2.ON
S5(a~b) : High Cut Filter
1.OFF 2.ON
S6(a~b) : Mode
1.Stereo 2.Monaural
S7 : Mute
1.ON 2.OFF
S8(a~b) : Speaker A
1.ON 2.OFF
S9(a~b) : Speaker B
1.ON 2.OFF
S10(a~b): Relay
S11 : Power Switch
1.OFF 2.ON

UNIT
RESISTOR : Ω
CAPACITOR : F

REPLACEMENT PARTS LIST·ERSATZTEILLISTE·TABLEAU DES PIECE (SR-903)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
CAPACITORS					
for TUNER PRINTED WIRING BOARD					
C101	0248362	Ceramic, discal	220pF	±5%	50V
C102	0248308	Ceramic, discal	8pF	±0.25pF	50V
C103	0246448	Ceramic, discal	22pF	±5%	50V
C104	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C105	0248335	Ceramic, discal	16pF	±5%	50V
C106	0248335	Ceramic, discal	16pF	±5%	50V
C107	0248635	Ceramic, discal	5pF	±0.25pF	50V
C108	0246464	Ceramic, discal	100pF	±5%	50V
C109	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C112	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C113	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C115	0231185	Ceramic, discal	0.56pF	±5%	500V
C116	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C117	0246418	Ceramic, discal	8pF	±0.25pF	50V
C118	0248307	Ceramic, discal	7pF	±0.25pF	50V
C119	0248310	Ceramic, discal	10pF	±0.25pF	50V
C120	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C121	0248344	Ceramic, discal	39pF	±5%	50V
C122	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C123	0248174	Ceramic, discal	15pF	±5%	50V
C124	0252532	Electrolytic	220μF		16V
C125	0231185	Ceramic, discal	0.56pF	±5%	500V
C126	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C151	0275015	Mylar, film	0.047μF	±10%	50V
C153	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C154	0248496	Ceramic, discal	18pF	±5%	50V
C155	0228322	Styrol	300pF	±5%	50V
C156	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C157	0275011	Mylar, film	0.01μF	±10%	50V
C158	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C159	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C161	0252225	Electrolytic	47μF		6.3V
C162	0248692	Ceramic, discal	220pF	±5%	50V
C163	0252815	Electrolytic	4.7μF		50V
C164	0275011	Mylar, film	0.01μF	±10%	50V
C165	0275011	Mylar, film	0.01μF	±10%	50V
C166	0275016	Mylar, film	0.068μF	±10%	50V
C167	0252225	Electrolytic	47μF		6.3V
C168	1274235	Mylar, film	5600pF	±5%	50V
C169	0252532	Electrolytic	220μF		16V
C170	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C171	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C172	0248470	Ceramic, discal	10pF	±0.25pF	50V
C201	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C202	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C203	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C205	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C207	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C208	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C209	0252813	Electrolytic	3.3μF		50V
C210	0252811	Electrolytic	1μF		50V
C211	0244175	Ceramic, discal	0.047μF	+80% −20%	25V
C212	0248736	Ceramic, discal	330pF	±10%	50V
C214	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C215	0252811	Electrolytic	1μF		50V
C216	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C217	0252525	Electrolytic	47μF		16V
C218	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C219	0275013	Mylar, film	0.022μF	±10%	50V
C222	0252875	Electrolytic	0.47μF		50V
C301	0252521	Electrolytic	10μF		16V
C302	0252815	Electrolytic	4.7μF		50V
C303	0252521	Electrolytic	10μF		16V
C304	0221522	Styrol	470pF	±5%	50V
C305	0252875	Electrolytic	0.47μF		50V
C306	0275015	Mylar, film	0.047μF	±10%	50V
C307	0252811	Electrolytic	1μF		50V
C308	0252875	Electrolytic	0.47μF		50V
C309	0252811	Electrolytic	1μF		50V
C310	0252811	Electrolytic	1μF		50V
C311	1274215	Mylar, film	4700pF	±5%	50V
C312	1274215	Mylar, film	4700pF	±5%	50V
C316	0252815	Electrolytic	4.7μF		50V
C317	0252815	Electrolytic	4.7μF		50V
C318	0252532	Electrolytic	220μF		16V
C319	0252811	Electrolytic	1μF		50V
C320	0252522	Electrolytic	22μF		16V
C321	1274215	Mylar, film	4700pF	±5%	50V
C322	1274215	Mylar, film	4700pF	±5%	50V
for EQUALIZER PRINTED WIRING BOARD					
C401(L,R)	0252811	Electrolytic	1μF		50V
C402(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C403(L,R)	0252225	Electrolytic	47μF		6.3V
C404(L,R)	0274013	Mylar, film	2200pF	±10%	50V
C405(L,R)	0274036	Mylar, film	8200pF	±10%	50V
C406(L,R)	0248732	Ceramic, discal	220pF	±10%	50V
C407(L,R)	0274011	Mylar, film	1000pF	±10%	50V
C408(L,R)	0257145	Electrolytic	10μF		16V
C409	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C901	0252815	Electrolytic	4.7μF		50V
C902	0252625	Electrolytic	47μF		25V
C903	0275016	Mylar, film	0.068μF	±10%	50V
C904	0275011	Mylar, film	0.01μF	±10%	50V
C905	0274012	Mylar, film	1500pF	±10%	50V
C906	0274011	Mylar, film	1000pF	±10%	50V
C907	0276011	Mylar, film	0.1μF	±10%	50V
C908	0252231	Electrolytic	100μF		6.3V
C909	0252815	Electrolytic	4.7μF		50V
C910	0252625	Electrolytic	47μF		25V
C911	0252815	Electrolytic	4.7μF		50V
for DC SUPPLY PRINTED WIRING BOARD					
C501	0252231	Electrolytic	100μF		6.3V
C502	0252625	Electrolytic	47μF		25V
C503	0252633	Electrolytic	330μF		25V
C504	0252633	Electrolytic	330μF		25V
C505	0257145	Electrolytic	10μF		16V
C506(L,R)	0276511	Myalr, film	0.1μF	±10%	100V
C801	0245408	Ceramic, discal	0.01μF	±20%	500V
C802	0245408	Ceramic, discal	0.01μF	±20%	500V
C803	0245408	Ceramic, discal	0.01μF	±20%	500V
C804	0245408	Ceramic, discal	0.01μF	±20%	500V
C805	0245408	Ceramic, discal	0.01μF	±20%	500V
C806	0245408	Ceramic, discal	0.01μF	±20%	500V
C807	0245408	Ceramic, discal	0.01μF	±20%	500V

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C808	0245408	Ceramic, discal	0.01μF	±20%	500V
C809	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C810	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C811	0245017	Ceramic, discal	0.01μF	+80% −20%	25V
C812	0252732	Electrolytic	220μF		35V
C813	0252732	Electrolytic	220μF		35V
C814	0252732	Electrolytic	220μF		35V
C819	0279954	Mylar, film	0.1μF	±10%	100V
C820	0279954	Mylar, film	0.1μF	±10%	100V
for TONE CONTROL PRINTED WIRING BOARD					
C601(L,R)	0252811	Electrolytic	1μF		50V
C603(L,R)	0257145	Electrolytic	10μF		16V
C604(L,R)	0228315	Styrol	150pF	±5%	50V
C605(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
C606(L,R)	0252811	Electrolytic	1μF		50V
C607(L,R)	0248736	Ceramic, discal	330pF	±10%	50V
C608(L,R)	0252231	Electrolytic	100μF		6.3V
C610(L,R)	0252231	Electrolytic	100μF		6.3V
C611(L,R)	0252571	Electrolytic	10μF		16V
C612(L,R)	0248724	Mylar, film	100pF	±10%	50V
C613(L,R)	0274014	Myalr, film	3300pF	±10%	50V
C614(L,R)	0274012	Mylar, film	1500pF	±10%	50V
C615(L,R)	0274316	Mylar, film	6800pF	±10%	50V
C616(L,R)	0275012	Mylar, film	0.015μF	±10%	50V
C617(L,R)	0275012	Mylar, film	0.015μF	±10%	6.3V
C618(L,R)	0252521	Electrolytic	10μF		16V
C619(L,R)	0252571	Electrolytic	10μF		16V
C620(L,R)	0248676	Ceramic, discal	47pF	±5%	50V
C621(L,R)	0252571	Electrolytic	10μF		16V
C622(L,R)	0252531	Electrolytic	100μF		16V
C623(L,R)	0276011	Mylar, film	0.1μF	±10%	50V
C624(L,R)	0274036	Mylar, film	8200pF	±10%	50V
C625(L,R)	0252521	Electrolytic	10μF		16V
C626(L,R)	0252521	Electrolytic	10μF		16V
C627(L,R)	0248676	Ceramic, discal	47pF	±5%	50V
C628(L,R)	0248724	Ceramic, discal	100pF	±10%	50V
C629(L,R)	0274013	Mylar, film	2200pF	±10%	50V
C630(L,R)	0252535	Electrolytic	470μF		16V
C631(L,R)	0252535	Electrolytic	470μF		16V
for MAIN AMPLIFIER PRINTED WIRING BOARD					
C701(L,R)	0252811	Electrolytic	1μF		50V
C702(L,R)	0248722	Ceramic, discal	82pF	±10%	50V
C703(L,R)	0252525	Electrolytic	47μF		16V
C704(L,R)	0247834	Ceramic, discal	15pF	±5%	500V
C705(L,R)	0247807	Ceramic, discal	7pF	±0.25pF	500V
C706(L,R)	0275711	Mylar, film	0.01μF	±10%	200V
C708(L,R)	0276511	Mylar, film	0.1μF	±10%	100V
C709(L,R)	0275713	Mylar, film	0.022μF	±10%	200V
C710(L,R)	0275713	Mylar, film	0.022μF	±10%	200V
C715	0252815	Electrolytic	4.7μF		50V
C716(L,R)	0247834	Ceramic, discal	15pF	±5%	500V
C717(L,R)	0247804	Ceramic, discal	4pF	±0.25pF	500V
C718	0276511	Mylar, film	0.1μF	±10%	100V
C719	0276011	Mylar, film	0.1μF	±10%	500V
C720	0276011	Mylar, film	0.1μF	±10%	500V
for CHASSIS ASSEMBLY					
C002	0214481	Paper	0.01μF	±20%	400V
C003	0250442	Electrolytic	6800μF		80V

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C004	0250442	Electrolytic	6800μF		80V
C005	0250884	Electrolytic	5600μF		40V
for REAR PLATE ASSEMBLY					
C007	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C008	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C009	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
C010	0245018	Ceramic, discal	0.022μF	+80% −20%	25V
RESISTORS					
for TUNER PRINTED WIRING BOARD					
R101	0114303	Carbon film	820kΩ	±5%	SRD¼P
R102	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R103	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R104	0114131	Carbon film	100Ω	±5%	SRD¼P
R105	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R106	0114209	Carbon film	22kΩ	±5%	SRD¼P
R107	0114161	Carbon film	1kΩ	±5%	SRD¼P
R108	0114183	Carbon film	8.2kΩ	±5%	SRD¼P
R109	0114207	Carbon film	18kΩ	±5%	SRD¼P
R110	0114161	Carbon film	1kΩ	±5%	SRD¼P
R111	0114057	Carbon film	47Ω	±5%	SRD¼P
R113	0114281	Carbon film	100kΩ	±5%	SRD¼P
R114	0114295	Carbon film	390kΩ	±5%	SRD¼P
R115	0114061	Carbon film	68Ω	±5%	SRD¼P
R116	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R117	0114131	Carbon film	100Ω	±5%	SRD¼P
R151	0114215	Carbon film	39kΩ	±5%	SRD¼P
R152	0114131	Carbon film	100Ω	±5%	SRD¼P
R153	0114135	Carbon film	150Ω	±5%	SRD¼P
R154	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R155	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R156	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R158	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R159	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R160	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R161	0114133	Carbon film	120Ω	±5%	SRD¼P
R162	0114161	Carbon film	1kΩ	±5%	SRD¼P
R201	0114131	Carbon film	100Ω	±5%	SRD¼P
R202	0114145	Carbon film	390Ω	±5%	SRD¼P
R203	0114149	Carbon film	560Ω	±5%	SRD¼P
R204	0114131	Carbon film	100Ω	±5%	SRD¼P
R205	0114221	Carbon film	68kΩ	±5%	SRD¼P
R206	0114149	Carbon film	560Ω	±5%	SRD¼P
R208	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R209	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R210	0114143	Carbon film	330Ω	±5%	SRD¼P
R211	0114201	Carbon film	10kΩ	±5%	SRD¼P
R212	0114203	Carbon film	12kΩ	±5%	SRD¼P
R213	0114217	Carbon film	47kΩ	±5%	SRD¼P
R214	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R216	0114287	Carbon film	180kΩ	±5%	SRD¼P
R217	0114161	Carbon film	1kΩ	±5%	SRD¼P
R218	0114139	Carbon film	220Ω	±5%	SRD¼P
R219	0114131	Carbon film	100Ω	±5%	SRD¼P
R220	0138177	Carbon film	47kΩ	±5%	SRD½SD
R301	0114289	Carbon film	220kΩ	±5%	SRD¼P
R302	0114219	Carbon film	56kΩ	±5%	SRD¼P

(SR-903)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R303	0114161	Carbon film	1kΩ	±5%	SRD¼P
R304	0114209	Carbon film	22kΩ	±5%	SRD¼P
R305	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R306	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R307	0114205	Carbon film	15kΩ	±5%	SRD¼P
R308	0114161	Carbon film	1kΩ	±5%	SRD¼P
R309	0114139	Carbon film	220Ω	±5%	SRD¼P
R310	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R311	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R312	0114131	Carbon film	100Ω	±5%	SRD¼P
R313	0114219	Carbon film	56kΩ	±5%	SRD¼P
R314	0114219	Carbon film	56kΩ	±5%	SRD¼P
R315	0114289	Carbon film	220kΩ	±5%	SRD¼P
R316	0114289	Carbon film	220kΩ	±5%	SRD¼P
R317	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R318	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R319	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R320	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R321	0114209	Carbon film	22kΩ	±5%	SRD¼P
R322	0114281	Carbon film	100kΩ	±5%	SRD¼P
R323	0114209	Carbon film	22kΩ	±5%	SRD¼P
R324	0114209	Carbon film	22kΩ	±5%	SRD¼P
R325	0114289	Carbon film	220kΩ	±5%	SRD¼P
R326	0114139	Carbon film	220Ω	±5%	SRD¼P
R327	0138203	Carbon film	120kΩ	±5%	SRD¼SD
for EQUALIZER PRINTED WIRING BOARD					
R401(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R402(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R403(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R404(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R405(L,R)	0114148	Carbon film	510Ω	±5%	SRD¼P
R406(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R407(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R408(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R409(L,R)	0114139	Carbon film	220Ω	±5%	SRD¼P
R410(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R411(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R903	0114217	Carbon film	47kΩ	±5%	SRD¼P
R904	0114209	Carbon film	22kΩ	±5%	SRD¼P
R905	0114143	Carbon film	330Ω	±5%	SRD¼P
R906	0114209	Carbon film	22kΩ	±5%	SRD¼P
R907	0114209	Carbon film	22kΩ	±5%	SRD¼P
R908	0114213	Carbon film	33kΩ	±5%	SRD¼P
R909	0114143	Carbon film	330Ω	±5%	SRD¼P
R910	0114161	Carbon film	1kΩ	±5%	SRD¼P
R911	0114285	Carbon film	150kΩ	±5%	SRD¼P
R912	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R913	0114303	Carbon film	820kΩ	±5%	SRD¼P
R914	0114283	Carbon film	120kΩ	±5%	SRD¼P
R915	0114201	Carbon film	10kΩ	±5%	SRD¼P
R916	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R917	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R918	0114281	Carbon film	100kΩ	±5%	SRD¼P
R919	0114217	Carbon film	47kΩ	±5%	SRD¼P
R920	0114297	Carbon film	470kΩ	±5%	SRD¼P
R921	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R922	0114135	Carbon film	150Ω	±5%	SRD¼P
R923	0114221	Carbon film	68kΩ	±5%	SRD¼P
R924	0114211	Carbon film	27kΩ	±5%	SRD¼P
R925	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R926	0114289	Carbon film	220kΩ	±5%	SRD¼P
R927	0114143	Carbon film	330Ω	±5%	SRD¼P
R928	0114281	Carbon film	100kΩ	±5%	SRD¼P
R929	0114209	Carbon film	22kΩ	±5%	SRD¼P

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R930	0114209	Carbon film	22kΩ	±5%	SRD¼P
R931	0134365	Composition	220Ω	±10%	RC½GF
R932	0114281	Carbon film	100kΩ	±5%	SRD¼P
for DC SUPPLY PRINTED WIRING BOARD					
R501	0114281	Carbon film	100kΩ	±5%	SRD¼P
R502	0114281	Carbon film	100kΩ	±5%	SRD¼P
R503	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R504	0114205	Carbon film	15kΩ	±5%	SRD¼P
R505	0114201	Carbon film	10kΩ	±5%	SRD¼P
R506	0114205	Carbon film	15kΩ	±5%	SRD¼P
R507	0114131	Carbon film	100Ω	±5%	SRD¼P
R508	0114285	Carbon film	150kΩ	±5%	SRD¼P
R509	0114205	Carbon film	15kΩ	±5%	SRD¼P
R510	0114209	Carbon film	22kΩ	±5%	SRD¼P
R511	0114209	Carbon film	22kΩ	±5%	SRD¼P
R512	0134371	Composition	680Ω	±10%	RC½GF
R513	0119526	Metal oxide	270Ω	±10%	RD2PA
R514	0119526	Metal oxide	270Ω	±10%	RD2PA
R515(L,R)	0119154	Metal	18Ω	±10%	RN2B
R516(L,R)	0119154	Metal	18Ω	±10%	RN2B
R517	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R804	0134377	Composition	2.2kΩ	±10%	RC½GF
R805	0134377	Composition	2.2kΩ	±10%	RC½GF
R806	0134377	Composition	2.2kΩ	±10%	RC½GF
R807	0134373	Composition	1kΩ	±10%	RC½GF
R808	0134373	Composition	1kΩ	±10%	RC½GF
R809	0134373	Composition	1kΩ	±10%	RC½GF
for TONE CONTROL PRINTED WIRING BOARD					
R601(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R602(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R603(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R604(L,R)	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R605(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R606(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R607(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R608(L,R)	0114291	Carbon film	270kΩ	±5%	SRD¼P
R609(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R610(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R611(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R612(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R613(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R614(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R615(L,R)	0114283	Carbon film	120kΩ	±5%	SRD¼P
R616(L,R)	0114207	Carbon film	18kΩ	±5%	SRD¼P
R617(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R618(L,R)	0114209	Carbon film	22kΩ	±5%	SRD¼P
R619(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R620(L,R)	0114137	Carbon film	180Ω	±5%	SRD¼P
R621(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R622(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R623(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R624(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R625(L,R)	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R626(L,R)	0114297	Carbon film	470kΩ	±5%	SRD¼P
R627(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R628(L,R)	0114209	Carbon film	22kΩ	±5%	SRD¼P
R629(L,R)	0114209	Carbon film	22kΩ	±5%	SRD¼P
R630(L,R)	0114299	Carbon film	560kΩ	±5%	SRD¼P
R631(L,R)	0114221	Carbon film	68kΩ	±5%	SRD¼P
R632(L,R)	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R633(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R634(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R635(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P

(SR-903)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R636(L,R)	0114207	Carbon film	18kΩ	±5%	SRD¼P
R637(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R638(L,R)	0114291	Carobn film	270kΩ	±5%	SRD¼P
R639(L,R)	0114221	Carbon film	68kΩ	±5%	SRD¼P
R640(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R641(L,R)	0114175	Carbon film	3.9kΩ	±5%	SRD¼P
R642(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R643	0114131	Carbon film	100Ω	±5%	SRD¼P
R644	0114131	Carbon film	100Ω	±5%	SRD¼P
R645	0114135	Carbon film	150Ω	±5%	SRD¼P
R646	0114161	Carbon film	1kΩ	±5%	SRD¼P
R647	0114161	Carbon film	1kΩ	±5%	SRD¼P
R648(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
for MAIN AMPLIFIER PRINTED WIRING BOARD					
R701(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R702(L,R)	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R703(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R704(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R705(L,R)	0114151	Carbon film	680Ω	±5%	SRD¼P
R706(L,R)	0114149	Carbon film	560Ω	±5%	SRD¼P
R707(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R708(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R710(L,R)	0114137	Carbon film	180Ω	±5%	SRD¼P
R711(L,R)	0117391	Metal oxide	1kΩ	±5%	RD¼PA
R712(L,R)	0114289	Carbon film	220kΩ	±5%	SRD¼P
R713(L,R)	0114283	Carbon film	120kΩ	±5%	SRD¼P
R714(L,R)	0114283	Carbon film	120kΩ	±5%	SRD¼P
R715(L,R)	0134387	Composition	15kΩ	±10%	RC½GF
R716(L,R)	0134387	Composition	15kΩ	±10%	RC½GF
R717(L,R)	0134368	Composition	390Ω	±10%	RC½GF
R718(L,R)	0134368	Composition	390Ω	±10%	RC½GF
R719(L,R)	0119429	Metal oxide	470Ω	±10%	RD1PA
R720(L,R)	0119429	Metal oxide	470Ω	±10%	RD1PA
R721(L,R)	0134380	Composition	3.9kΩ	±10%	RC½GF
R722(L,R)	0134380	Composition	3.9kΩ	±10%	RC½GF
R723(L,R)	0134361	Composition	100Ω	±10%	RC½GF
R724(L,R)	0134361	Composition	100Ω	±10%	RC½GF
R725(L,R)	0119233	Metal	0.22Ω	±10%	RN3B
R726(L,R)	0119233	Metal	0.22Ω	±10%	RN3B
R727(L,R)	0134289	Composition	10Ω	±10%	RC½GF
R729(L,R)	0119142	Metal	8.2Ω	±10%	RN2B
R730(L,R)	0119142	Metal	8.2Ω	±10%	RN2B
R731	0114205	Carbon film	15kΩ	±5%	SRD¼P
R732	0114161	Carbon film	1kΩ	±5%	SRD¼P
R733	0114219	Carbon film	56kΩ	±5%	SRD¼P
R734	0114219	Carbon film	56kΩ	±5%	SRD¼P
R735	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R736	0119451	Metal oxide	6.8kΩ	±10%	RD1PA
R737(L,R)	0114137	Carbon film	180Ω	±5%	SRD¼P
R738(L,R)	0117391	Metal oxide	1kΩ	±5%	RD¼PA
for CHASSIS ASSEMBLY					
R001	0111955	Metal (for West Germany & France)	2700kΩ	±10%	RN½B
R003	0119547	Metal oxide	3.3kΩ	±10%	RD2PA
R004	0119547	Metal oxide	3.3kΩ	±10%	RD2PA
for REAR PLATE ASSEMBLY					
R002	0139007	Composition	1MΩ	±10%	RC½GF

SYMBOL NO.	STOCK NO.	DESCRIPTION			
for SUB PRINTED WIRING BOARD					
R751	0114133	Carbon film	120Ω	±5%	SRD¼P
R752	0114131	Carbon film	100Ω	±5%	SRD¼P
R753	0114209	Carbon film	0.022μF	±5%	SRD¼P
ICs, FET & TRANSISTORS					
for TUNER PRINTED WIRING BOARD					
IC151	2367201	HA1138			
IC201	2367191	HA1211			
IC202	2367122	HA1137			
IC301	2367173	HA1156WZ			
FET101	2327433	2SK45 Ⓑ BK			
Q101	0573510	2SC535 Ⓑ			
Q102	0573507	2SC461 Ⓑ			
Q301	2327443	2SC1344 Ⓔ			
Q302	2327443	2SC1344 Ⓔ			
Q303	2327444	2SC1344 Ⓕ			
Q304	2327444	2SC1344 Ⓕ			
Q305	2327443	2SC1344 Ⓔ			
for EQUALIZER PRINTED WIRING BOARD					
IC401	2367152	HA1452 W			
Q901	2327443	2SC1344 Ⓔ			
Q902	2327443	2SC1344 Ⓔ			
Q903	2327363	2SC1345 Ⓔ			
Q904	2327364	2SC1345 Ⓕ			
Q905	2327364	2SC1345 Ⓕ			
Q906	2327443	2SC1344 Ⓔ			
Q907	2327443	2SC1344 Ⓔ			
Q908	2327443	2SC1344 Ⓔ			
Q909	2327363	2SC1345 Ⓔ			
Q910	2327443	2SC1344 Ⓔ			
for DC SUPPLY PRINTED WIRING BOARD					
Q501	2327443	2SC1344 Ⓔ			
Q502	2328083	2SA844 Ⓔ			
Q503	2327363	2SC1345 Ⓔ			
Q504	2327333	2SC1213 Ⓒ			
Q505	2327443	2SC1344 Ⓔ			
Q801	2327802	2SD478 Ⓒ			
Q802	2327792	2SB568 Ⓒ			
Q803	2327802	2SD478 Ⓒ			
for TONE CONTROL PRINTED WIRING BOARD					
Q601(L,R)	2327443	2SC1344 Ⓔ			
Q602(L,R)	2327743	2SA836 Ⓔ			
Q603(L,R)	2327443	2SC1344 Ⓔ			
Q604(L,R)	2327443	2SC1344 Ⓔ			
Q605(L,R)	2327443	2SC1344 Ⓔ			
for MAIN AMPLIFIER PRINTED WIRING BOARD					
Q701(L,R)	2327913	2SC1775 Ⓔ			
Q702(L,R)	2327913	2SC1775 Ⓔ			
Q703(L,R)	2328122	2SB628 Ⓡ			
Q704(L,R)	2328141	2SC1514			
Q705(L,R)	2327913	2SC1775 Ⓔ			
Q706(L,R)	2327907	2SA872B Ⓔ			
Q707(L,R)	2328092	2SD608 Ⓡ			

(SR-903)

SYMBOL NO.	STOCK NO.	DESCRIPTION
Q708(L,R)	2327795	2SB568A Ⓒ
Q709(L,R)	2328112	2SD586 Ⓡ
Q710(L,R)	2328102	2SB616 Ⓡ
Q711(L,R)	2328171	2SD581A Ⓑ
Q712(L,R)	2328151	2SB611A Ⓑ
Q713(L,R)	2327913	2SC1775 Ⓔ
for SUB PRINTED WIRING BOARD		
Q751	2327907	2SA872B Ⓔ

DIODES & THYRISTOR

SYMBOL NO.	STOCK NO.	DESCRIPTION
for TUNER PRINTED WIRING BOARD		
CR102	2337141	1S2267
CR151	2337011	1S2076
CR152	0575002	1N34A
CR153	2337011	1S2076
CR154	2337011	1S2076
CR155	2337011	1S2076
CR156	2337011	1S2076
CR201	2337011	1S2076
CR202	2337011	1S2076
CR301	2337011	1S2076
CR302	2337011	1S2076
for DC SUPPLY PRINTED WIRING BOARD		
CR501	2337011	1S2076
CR502	2337011	1S2076
CR503	2337011	1S2076
CR504	2337083	W06C
CR505	2337083	W06C
CR506	2337011	1S2076
CR507	2337182	HZ-16
CR801	2337341	S5VB20
CR802	2337341	S5VB20
CR803	2337181	HZ-15
CR804	2337181	HZ-15
CR805	2337182	HZ-16
for TONE CONTROL PRINTED WIRING BOARD		
CR601	2337011	1S2076
CR602	2337011	1S2076
CR603	2337011	1S2076
CR604	2337011	1S2076
CR605	2337011	1S2076
for MAIN AMPLIFIER PRINTED WIRING BOARD		
CR701(L,R)	2337011	1S2076
CR702(L,R)	2337011	1S2076
CR703(L,R)	2328041	1SS62
CR704(L,R)	2328041	1SS62
CR705(L,R)	2337011	1S2076
CR708(L,R)	2337011	1S2076
CR709(L,R)	2337011	1S2076
CR710(L,R)	2337011	1S2076
CR711(L,R)	2337011	1S2076
CR712(L,R)	2337011	1S2076
CR713(L,R)	2328031	U06C
CR714(L,R)	2328031	U06C
CR715(L,R)	2347122	MV-1Y
CR716(L,R)	2347042	MV-5W
CR717	2337182	HZ-16
CR718(L,R)	2328041	1SS62
CR719(L,R)	2337011	1S2076
CR751	2337011	1S2076 (for SUB PRINTED WIRING BOARD)
SCR701	2337091	CW01B
for EQUALIZER PRINTED WIRING BOARD		
CR901	0575019	1N60P
CR902	0575019	1N60P
for REAR PLATE ASSEMBLY		
CR001	2337011	1S2076

VARIABLE RESISTORS

SYMBOL NO.	STOCK NO.	DESCRIPTION
for TUNER PRINTED WIRING BOARD		
VR201	0151226	100kΩ - (B)
VR202	0151254	100kΩ - (B)
VR301	0151284	300kΩ - (B)
VR302	0151224	10kΩ - (B)
VR303	0151281	20kΩ - (B)
for TONE CONTROL PRINTED WIRING BOARD		
VR601(L,R), VR602	0158061	200kΩ - (B) (Volume, Balance)
VR603(L,R)	0156152	200kΩ - (B) (Treble)
VR604(L,R)	0156152	200kΩ - (B) (Midrange)
VR605(L,R)	0156152	200kΩ - (B) (Bass)
for MAIN AMPLIFIER PRINTED WIRING BOARD		
VR701(L,R)	0151256	300Ω - (B)

COILS & TRANSFORMERS

SYMBOL NO.	STOCK NO.	DESCRIPTION
for TUNER PRINTED WIRING BOARD		
L101	2134651	FM antenna coil
L102	2134657	FM RF1 coil
L103	2134658	FM RF2 coil
L104	2227201	Choke coil (2.2μH)
L105	2134471	FM OSC coil
L201	2227119	Choke coil (18μH)
L202	2227081	Choke coil (1μH)
T101	2154293	FM IF transformer
T201	2154271	FM IF transformer
T251	2134446	AM RF coil
T252	2134445	AM OSC coil
T253	2154181	AM IF transformer
for MAIN AMPLIFIER PRINTED WIRING BOARD		
L703(L,R)	2227261	Audio trap coil (2.2μH)
for REAR PLATE ASSEMBLY		
L003	2227032	Choke coil (2.2μH)

MISCELLANEOUS

SYMBOL NO.	STOCK NO.	DESCRIPTION
ELECTROLYTIC PARTS		
	2505288	Tuner printed wiring board assembly

(SR-903)

SYMBOL NO.	STOCK NO.	DESCRIPTION
	2505911	Equalizer printed wiring board assembly
	2506341	Tone control printed wiring board assembly
	2505935	Main amplifier printed wiring board assembly
	2505943	DC supply printed wiring board assembly
	2506351	Sub printed wiring board assembly
	2505801	Switch printed wiring board assembly
VC101-104 VC151-153	0281180	Variable capacitor
TC104	0283123	Trimmer capacitor
MF201	2134547	Ceramic, filter
MF202	2134547	Ceramic, filter
MF203	2134547	Ceramic, filter
RY901	2647061	Reed relay
RY902	2647062	Reed relay
S501	2647072	Power relay
S601 a-f	2617592	Switch-rotary switch (for Function sw.)
S602 a-d	2627121	Switch-lever switch (for Tape copy sw.)
S603 a,b	2627111	Switch-lever switch (for Tape monitor sw.)
S604 a,b S605 a,b S606 a,b	2637871	Switch-push switch (for Adaptor, Loudness, Mode sw.)
S607 a,b S608 a,b	2637731	Switch-push switch (for Low filter, High filter sw.)
S8, 9	2637741	Switch-push switch (for speaker sw.)
	2637864	Switch-power switch
	2787452	Switch-Thermal switch
CP601	2134492	Leak filter
F003	2727193	Fuse (2A)
F701(L,R)	2727337	Fuse (4A)
F702(L,R)	2727181	Holder-fuse holder
	2767233	Lamp-indicator lamp (8V, 30mA)
PL13	2337233	Light emitting diode
T001	2218281	Power transformer
	2577294	Signal meter (for U.K., France & Switzerland)
	2577295	Signal meter (for West Germany & Australia)
	2577242	Tuning meter (for U.K., France & Switzerland)
	2577296	Tuning meter (for West Germany & Australia)
	2677201	Jack-headphone jack
	2687311	Terminal-6P terminal
	2687392	Terminal-4P terminal
	2687831	Terminal-5P terminal
	2657123	Voltage changing socket

MECHANICAL PARTS

	3199596	Dial scale (Black) (for West Germany & Australia)
	3199597	Dial scale (Gold) (for U.K., France & Switzerland)
	3387111	Dial pointer (for U.K., France & Switzerland)
	3387112	Dial pointer (for West Germany & Australia)
	0666704	Dial cord holding fixture
	3337201	Spring
	4398541	Lamp cover (with lamp)
	4393763	Meter panel (for West Germany & Australia)
	4393764	Meter panel (for U.K., France & Switzerland)
	3923402	Indicator (orange)
	3923401	Indicator (red)
	4684131	Indicator cover
	4571933	Flywheel assembly
	3922541	Pulley
	4567411	3 ϕ x 6CT bind screw (yellow)
	4567413	3 ϕ x 10CT bind screw (yellow)
	4567453	3 ϕ x 10CT bind screw (silver)
	4567451	3 ϕ x 6CT bind screw (silver)
	4567431	3 ϕ x 6CT bind screw (black)
	4567421	4 ϕ x 6CT bind screw
	4567433	3 ϕ x 10CT bind screw (black)
	4387911	Nut
	4790096	Washer
	4567412	3 ϕ x 8CT bind screw
	4397021	Bushing (for transistor)
	3920371	Bushing (for power transistor)

for REAR PLATE ASSEMBLY

F001	2727196	Fuse-fuse (3.15A)
	2727121	Holder-fuse holder
	2657361	Socket-coaxial cable socket
	0541358	Socket-DIN 5P socket
	2687701	Terminal-4P speaker terminal
	2687421	Terminal-4P screw terminal
	2687461	Terminal-2P terminal board
	2687642	Jack-8P US pin jack
L001	2134721	Ferrite antenna
L002	2120871	Balun transformer
	4090092	Earth screw
	4567431	3 ϕ x 6CT bind screw
	4567453	3 ϕ x 10CT bind screw (silver)
	4567433	3 ϕ x 10CT bind screw (black)
	4568833	3 ϕ x 10CT screw
	3913001	Bushing (for ferrite antenna & AC power cord) (for France & West Germany) (for ferrite antenna) (for U.K., Switzerland & Australia)
	3715183	Bushing (for AC power cord) (for U.K. & Switzerland)
	3715184	Bushing (for AC power cord) (for Australia)
	2748621	AC power cord (for U.K.)
	2748511	AC power cord (for France & West Germany)
	2747771	AC power cord (for Switzerland)
	2747301	AC power cord (for Australia)
	2787221	Belt (for AC power cord) (for Australia)

for FINAL ASSEMBLY

	3244232	Escutcheon assembly (for West Germany & Australia)
	3244236	Escutcheon assembly (for U.K., France & Switzerland)
	3284041	Knob (Bass, Midrange, Treble) (for U.K., France & Switzerland)
	3284042	Knob (Bass, Midrange, Treble) (for West Germany & Australia)
	3282804	Knob-push knob (Speaker A,B, others) (for West Germany & Australia)
	3282397	Knob-push knob (Power) (for West Germany & Australia)
	3284451	Knob-push knob (for U.K., France & Switzerland)
	3284203	Knob-Tuning knob (Gold) (for U.K., France Switzerland)
	3284204	Knob-Tuning knob (Black) (for West Germany & Australia)
	3284461	Knob-Balance knob (Gold) (for U.K., France & Switzerland)
	3284462	Knob-Balance knob (Black) (for West Germany & Australia)
	3284481	Knob-Volume knob (Gold) (for U.K., France & Switzerland)
	3284482	Knob-Volume knob (Black) (for West Germany & Australia)
	3284023	Knob-Function (Black) (for West Germany & Australia)
	3284021	Knob-Function (Gold) (for U.K., France & Switzerland)
	3282983	Knob-lever knob (Tape copy) (for West Germany) & Australia)
	3282985	Knob-lever knob (Tape monitor) (for U.K., France & Switzerland)
	3282398	Knob-push knob (Power) (for U.K., France & Switzerland)
	4743422	Ring-Bass, Treble, Balance knob
	4743423	Ring-Volume, Function knob
	4743852	Ring
	3710471	Headphone cap (Black) (for West Germany & Australia)
	3916411	Leg
	4567413	3 ϕ x 10CT bind screw
	4567411	3 ϕ x 6CT bind screw
	4567446	4 ϕ x 16CT bind screw

for CABINET ASSEMBLY

9403057	Cabinet (for U.K.)
9403049	Cabinet (for France, Switzerland, West Germany & Australia)

for ACCESSORY

2748371	FM antenna

(SR-803)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
CAPACITORS					
for TUNER PRINTED WIRING BOARD					
C101	0248362	Ceramic, discal	220pF	±5%	50V
C102	0248308	Ceramic, discal	8pF	±0.25pF	50V
C103	0246448	Ceramic, discal	22pF	±5%	50V
C104	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C105	0248335	Ceramic, discal	16pF	±5%	50V
C106	0248335	Ceramic, discal	16pF	±5%	50V
C107	0248635	Ceramic, discal	5pF	±0.25pF	10V
C108	0246464	Ceramic, discal	100pF	±5%	50V
C109	0245017	Ceramic, discal	0.01μF	+80 −20%	25V
C112	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C113	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C115	0231185	Ceramic, discal	0.56pF	±5pF	500V
C116	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C117	0246418	Ceramic, discal	8pF	±0.25pF	50V
C118	0248307	Ceramic, discal	7pF	±0.25pF	50V
C119	0248310	Ceramic, discal	10pF	±0.25pF	50V
C120	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C123	0248177	Ceramic, discal	20pF	±5%	50V
C124	0252532	Electrolytic	220μF		16V
C125	0231185	Ceramic, discal	0.56pF	±5pF	500V
C126	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C151	0275015	Mylar, film	0.047μF	±10%	50V
C152	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C153	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C154	0248496	Ceramic, discal	18pF	±5%	50V
C155	0228322	Styrol	300pF	±5%	50V
C156	0244175	Ceramic, discal	0.047μF	+80 −20%	25V
C157	0275011	Mylar, film	0.01μF	±10%	50V
C158	0244175	Ceramic, discal	0.047μF	+80 −20%	25V
C159	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C161	0252225	Electrolytic	47μF		6.3V
C162	0248692	Ceramic, discal	220pF	±5%	50V
C163	0252815	Electrolytic	4.7μF		50V
C164	0275011	Mylar, film	0.01μF	±10%	50V
C165	0275011	Myalr, film	0.01μF	±10%	50V
C166	0275016	Myalr, film	0.068μF	±10%	50V
C167	0252225	Electrolytic	47μF		6.3V
C168	1274235	Mylar, film	5600pF	±5%	50V
C169	0252532	Electrolytic	220μF		16V
C201	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C202	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C203	0244175	Ceramic, discal	0.047μF	+80 −20%	25V
C205	0244175	Ceramic, discal	0.047μF	+80 −20%	25V
C207	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C208	0244175	Ceramic, discal	0.047μF	+80 −20%	25V
C209	0252813	Electrolytic	3.3μF		50V
C210	0252811	Electrolytic	1μF		50V
C211	0244175	Ceramic, discal	0.047μF	+80 −20%	25V
C212	0248676	Ceramic, discal	47pF	±5%	50V
C214	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C215	0252811	Electrolytic	1μF		50V
C216	0245018	Ceramic, discal	0.022μF	+80 −20%	25V
C217	0252525	Electrolytic	47μF		16V
C218	0245018	Ceramic, discal	0.022μF	+80 −20%	25V

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C219	0275013	Mylar, film	0.022μF	±10%	50V
C222	0251925	Aluminium solid	0.47μF	±10%	25V
C301	0252521	Electrolytic	10μF		16V
C302	0252815	Electrolytic	4.7μF		50V
C303	0252521	Electrolytic	10μF		16V
C304	0221522	Styrol	470pF	±5%	25V
C305	0251925	Aluminium solid	0.47μF	±10%	25V
C306	0275015	Mylar, film	0.047μF	±10%	50V
C307	0252811	Electrolytic	1μF		50V
C308	0251925	Aluminium solid	0.47μF	±10%	25V
C309	0252811	Electrolytic	1μF		50V
C310	0252811	Electrolytic	1μF		50V
C311	1275211	Mylar, film	0.01μF	±5%	50V
C312	1275211	Mylar, film	0.01μF	±5%	50V
C316	0252815	Electrolytic	4.7μF		50V
C317	0252815	Electrolytic	4.7μF		50V
C318	0252532	Electrolytic	220μF		16V
C319	0252811	Electrolytic	1μF		50V
C320	0252522	Electrolytic	22μF		16V
for EQUALIZER PRINTED WIRING BOARD					
C401(L,R)	0252811	Electrolytic	1μF		50V
C402(L,R)	0248684	Ceramic, discal	100pF	±5%	50V
C403(L,R)	0252225	Electrolytic	47μF		6.3V
C404(L,R)	0248732	Ceramic, discal	220pF	±10%	50V
C405(L,R)	0274013	Mylar, film	2200pF	±10%	50V
C406(L,R)	0274036	Mylar, film	8200pF	±10%	50V
C407(L,R)	0274011	Mylar, film	1000pF	±10%	50V
C408(L,R)	0257145	Electrolytic	10μF		16V
C409(L,R)	0252811	Electrolytic	1μF		50V
C410(L,R)	0257145	Electrolytic	10μF		16V
C901	0252815	Electrolytic	4.7μF		50V
C902	0252625	Electrolytic	47μF		25V
for PRE-TONE PRINTED WIRING BOARD					
C601(L,R)	0252602	Electrolytic	1μF		25V
C602(L,R)	0248722	Ceramic, idscal	82pF	±10%	50V
C603(L,R)	0252571	Electrolytic	10μF		16V
C604(L,R)	0252521	Electrolytic	10μF		16V
C605(L,R)	0275016	Mylar, film	0.068μF	±10%	50V
C606(L,R)	0275016	Mylar, film	0.068μF	±10%	50V
C607(L,R)	0274315	Mylar, film	4,700pF	±10%	50V
C608(L,R)	0252571	Electrolytic	10μF		16V
C109(L,R)	0252571	Electrolytic	10μF		16V
C610(L,R)	0248728	Ceramic, discal	150pF	±10%	50V
C611(L,R)	0252231	Electrolytic	100μF		6.3V
C612(L,R)	0276011	Mylar, film	0.1μF	±10%	50V
C616	0252633	Electrolytic	330μF		25V
C617	0257181	Electrolytic	1μF		50V
for SWITCH PRINTED WIRING BOARD					
C614(L,R)	0228315	Styrol	150pF	±5%	50V
C615(L,R)	0275014	Mylar, film	0.033μF	±10%	50V
for MAIN PRINTED WIRING BOARD					
C501	0257109	Electrolytic	100μF		6.3V
C502	0252525	Electrolytic	47μF		16V

(SR-803)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
C503	0252811	Electrolytic	1μF		50V
C701(L,R)	0252811	Electrolytic	1μF		50V
C702(L,R)	0252225	Electrolytic	47μF		6.3V
C705(L,R)	0275011	Mylar, film	0.01μF	±10%	50V
C706(L,R)	0275011	Myalr, film	0.01μF	±10%	50V
C708(L,R)	0248664	Ceramic, discal	15pF	±5%	50V
C709(L,R)	0276213	Mylar, film	0.22μF	±10%	50V
C710(L,R)	0248720	Ceramic, discal	68pF	±10%	50V
C711(L,R)	0248720	Ceramic, discal	68pF	±10%	50V
C801	0275011	Mylar, film	0.01μF	±10%	50V
C802	0275011	Mylar, film	0.01μF	±10%	50V
C803	0252732	Electrolytic	220μF		50V
C804	0252732	Electrolytic	220μF		35V
C805	0175011	Mylar, film	0.01μF	±10%	50V
C806	0252732	Electrolytic	220μF		35V
C807	0252633	Electrolytic	330μF		25V
C808	0252633	Electrolytic	330μF		25V
C809	0245408	Ceramic, discal	0.01μF	±20%	500V
C810	0245408	Ceramic, discal	0.01μF	±20%	500V
C811	0245408	Ceramic, discal	0.01μF	±20%	500V
C812	0245408	Ceramic, discal	0.01μF	±20%	500V
for CHASSIS ASSEMBLY					
C001	0250631	Electrolytic	12000μF		63V
C002	0250631	Electrolytic	12000μF		63V
C003	0214481	Paper	0.01μF	±20%	400V
C004	0246007	Ceramic, discal	0.1μF	$^{+80}_{-20}$%	25V
C005	0245018	Ceramci, discal	0.022μF	$^{+80}_{-20}$%	25V
C007	0279954	Mylar, film	0.01μF	±10%	100V

RESISTORS

for TUNER PRINTED WIRING BOARD

R101	0114303	Carbon film	820kΩ	±5%	SRD¼P
R102	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R103	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R104	0114131	Carbon film	100Ω	±5%	SRD¼P
R105	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R106	0114209	Carbon film	22kΩ	±5%	SRD¼P
R107	0114161	Carbon film	1kΩ	±5%	SRD¼P
R108	0114183	Carbon film	8.2kΩ	±5%	SRD¼P
R109	0114207	Carbon film	18kΩ	±5%	SRD¼P
R110	0114161	Carbon film	1kΩ	±5%	SRD¼P
R111	0114057	Carbon film	47Ω	±5%	SRD¼P
R115	0114131	Carbon film	100Ω	±5%	SRD¼P
R116	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R117	0114059	Carbon film	56Ω	±5%	SRD¼P
R151	0114215	Carbon film	39kΩ	±5%	SRD¼P
R152	0114131	Carbon film	100Ω	±5%	SRD¼P
R153	0114135	Carbon film	150Ω	±5%	SRD¼P
R154	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R155	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R156	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R158	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R159	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R160	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R161	0114133	Carbon film	120Ω	±5%	SRD¼P
R162	0114161	Carbon film	1kΩ	±5%	SRD¼P

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R201	0114131	Carbon film	100Ω	±5%	SRD¼P
R202	0114145	Carbon film	390Ω	±5%	SRD¼P
R203	0114145	Carbon film	390Ω	±5%	SRD¼P
R204	0114131	Carbon film	100Ω	±5%	SRD¼P
R205	0114285	Carbon film	150kΩ	±5%	SRD¼P
R206	0114145	Carbon film	390Ω	±5%	SRD¼P
R208	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R209	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R210	0114143	Carbon film	330Ω	±5%	SRD¼P
R211	0114201	Carbon film	10kΩ	±5%	SRD¼P
R212	0114203	Carbon film	12kΩ	±5%	SRD¼P
R213	0114217	Carbon film	47kΩ	±5%	SRD¼P
R214	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R216	0114287	Carbon film	180kΩ	±5%	SRD¼P
R217	0114161	Carbon film	1kΩ	±5%	SRD¼P
R218	0114139	Carbon film	220Ω	±5%	SRD¼P
R219	0114131	Carbon film	100Ω	±5%	SRD¼P
R220	0138177	Carbon film	47kΩ	±5%	SRD¼SD
R301	0114289	Carbon film	220kΩ	±5%	SRD¼P
R302	0114219	Carbon film	56kΩ	±5%	SRD¼P
R303	0114161	Carbon film	1kΩ	±5%	SRD¼P
R304	0114209	Carbon film	22kΩ	±5%	SRD¼P
R305	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R306	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R307	0114205	Carbon film	15kΩ	±5%	SRD¼P
R308	0114161	Carbon film	1kΩ	±5%	SRD¼P
R309	0114139	Carbon film	220Ω	±5%	SRD¼P
R310	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R311	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R312	0114131	Carbon film	100Ω	±5%	SRD¼P
R313	0114219	Carbon film	56kΩ	±5%	SRD¼P
R314	0114219	Carbon film	56kΩ	±5%	SRD¼P
R315	0114289	Carbon film	220kΩ	±5%	SRD¼P
R316	0114289	Carbon film	220kΩ	±5%	SRD¼P
R317	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R318	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R319	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R320	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R321	0114209	Carbon film	22kΩ	±5%	SRD¼P
R322	0114209	Carbon film	22kΩ	±5%	SRD¼P
R323	0114209	Carbon film	22kΩ	±5%	SRD¼P
R324	0114209	Carbon film	22kΩ	±5%	SRD¼P
R325	0114289	Carbon film	220kΩ	±5%	SRD¼P
R326	0114139	Carbon film	220Ω	±5%	SRD¼P
R327	0138203	Carbon film	120kΩ	±5%	SRD¼P

for EQUALIZER PRINTED WIRING BOARD

R401(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R402(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R403(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R404(L,R)	0114151	Carbon film	680Ω	±5%	SRD¼P
R405(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R406(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R407(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R408(L,R)	0114139	Carbon film	220Ω	±5%	SRD¼P
R409(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R410(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R411(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R412(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R413(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R414(L,R)	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R415(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R416(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R417(L,R)	0114291	Carbon film	270kΩ	±5%	SRD¼P

(SR-803)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R418(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R419(L,R)	0114223	Carbon film	82kΩ	±5%	SRD¼P
R420(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R421	0114161	Carbon film	1kΩ	±5%	SRD¼P
R422	0114161	Carbon film	1kΩ	±5%	SRD¼P
R423(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R901	0114217	Carbon film	47kΩ	±5%	SRD¼P
R902	0114209	Carbon film	22kΩ	±5%	SRD¼P
R903	0114143	Carbon film	330Ω	±5%	SRD¼P
R904	0114209	Carbon film	22kΩ	±5%	SRD¼P
R905	0114209	Carbon film	22kΩ	±5%	SRD¼P
R906	0114213	Carbon film	33kΩ	±5%	SRD¼P
R907	0114143	Carbon	330Ω	±5%	SRD¼P
for PRE TONE PRINTED WIRING BOARD					
R601(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R602(L,R)	0114285	Carbon film	150kΩ	±5%	SRD¼P
R603(L,R)	0114301	Carbon film	680kΩ	±5%	SRD¼P
R605(L,R)	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R606(L,R)	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R607(L,R)	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R608(L,R)	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R609(L,R)	0114283	Carbon film	120kΩ	±5%	SRD¼P
R610	0114131	Carbon film	100Ω	±5%	SRD¼P
R611(L,R)	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R614(L,R)	0114177	Carbon film	4.7kΩ	±5%	SRD¼P
R615(L,R)	0114163	Carbon film	1.2kΩ	±5%	SRD¼P
R616(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R617(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R618(L,R)	0114207	Carbon film	18kΩ	±5%	SRD¼P
R619(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R621(L,R)	0114297	Carbon film	470kΩ	±5%	SRD¼P
for SWITCH PRINTED WIRING BOARD					
R620(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
for MAIN PRINTED WIRING BOARD					
R501	0114201	Carbon film	10kΩ	±5%	SRD¼P
R502	0114201	Carbon film	10kΩ	±5%	SRD¼P
R503	0114223	Carbon film	82kΩ	±5%	SRD¼P
R504	0114221	Carbon film	68kΩ	±5%	SRD¼P
R505	0114219	Carbon film	56kΩ	±5%	SRD¼P
R506	0114281	Carbon film	100kΩ	±5%	SRD¼P
R507	0114289	Carbon film	220kΩ	±5%	SRD¼P
R508	0134383	Composition	6.8kΩ	±10%	RC½GF
R509	0114161	Carbon film	1kΩ	±5%	SRD¼P
R511	0114209	Carbon film	22kΩ	±5%	SRD¼P
R512	0134371	Composition	680Ω	±10%	RC½GF
R513	0138133	Carbon film	3.3kΩ	±5%	SRD¼SD
R701(L,R)	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R702(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R704(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R705(L,R)	0114205	Carbon film	15kΩ	±5%	SRD¼P
R706(L,R)	0114053	Carbon film	33Ω	±5%	SRD¼P
R707(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R708(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R709(L,R)	0134365	Composition	220Ω	±10%	RC½GF
R710(L,R)	0134365	Composition	220Ω	±10%	RC½GF

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R711(L,R)	0119041	Metal	10Ω	±10%	RN1B
R712(L,R)	0119041	Metal	10Ω	±10%	RN1B
R713(L,R)	0119237	Metal	0.47Ω	±10%	RN3B
R714(L,R)	0119237	Metal	0.47Ω	±10%	RN3B
R715(L,R)	0119139	Metal	4.7Ω	±10%	RN2B
R716(L,R)	0119041	Metal	10Ω	±10%	RN1B
R717(L,R)	0119526	Metal oxide	270Ω	±10%	RD2PA
R718(R)	0114141	Carbon film	270Ω	±5%	SRD¼P
R719(L,R)	0114061	Carbon film	68Ω	±5%	SRD¼P
R720(L,R)	0134383	Composition	6.8kΩ	±10%	RC½GF
R721(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R801	0134379	Composition	3.3kΩ	±10%	RC½GF
R802	0134379	Composition	3.3kΩ	±10%	RC½GF
R803	0134373	Composition	1kΩ	±10%	RC½GF
R804	0134373	Composition	1kΩ	±10%	RC½GF
R805	0119421	Metal oxide	100Ω	±10%	RD1PA
R806	0119421	Metal oxide	100Ω	±10%	RD1PA
R807	0134378	Composition	2.7kΩ	±10%	RC½GF
R808	0134373	Composition	1kΩ	±10%	RC½GF
R809	0119424	Metal oxide	180Ω	±10%	RD1PA
R810	0119424	Metal oxide	180Ω	±10%	RD1PA
for CHASSIS ASSEMBLY					
R003	0139007	Composition	1000kΩ	±10%	RC½GF

FET, ICs & TRANSISTORS

for TUNER PRINTED WIRING BOARD		
FET101	2327432	3SK45 Ⓑ
IC201	2367191	HA1211
IC202	2367122	HA1137
IC301	2367173	HA1156WZ
IC151	2367201	HA1138
Q101	0573510	2SC535 Ⓑ
Q102	0573507	2SC461 Ⓑ
Q301	2327443	2SC1344 Ⓔ
Q302	2327443	2SC1344 Ⓔ
Q303	2327444	2SC1344 Ⓕ
Q304	2327444	2SC1344 Ⓕ
Q305	2327443	2SC1344 Ⓔ
for EQUALIZER PRINTED WIRING BOARD		
IC401	2367152	HA1452W
Q401(L,R)	2327443	2SC1344 Ⓔ
Q901	2327443	2SC1344 Ⓔ
Q902	2327443	2SC1344 Ⓔ
Q903	2327443	2SC1344 Ⓔ
for PRE-TONE PRINTED WIRING BOARD		
Q601(L,R)	2327443	2SC1344 Ⓔ
Q602(L,R)	2327443	2SC1344 Ⓔ
Q603(L,R)	2327453	2SA673 Ⓒ
for MAIN PRINTED WIRING BOARD		
IC701	2367152	HA1452W

(SR-803)

SYMBOL NO.	STOCK NO.	DESCRIPTION
Q501	2320063	2SC458 Ⓒ
Q502	2320063	2SC458 Ⓒ
Q503	2320063	2SC458 Ⓒ
Q504	2327333	2SC1213 Ⓒ
Q505	2320063	2SC458 Ⓒ
Q701(L,R)	2327802	2SD478 Ⓒ
Q702(L,R)	2327792	2SB568 Ⓒ
Q703(L,R)	2327624	2SA753 Ⓒ
Q704(L,R)	2327613	2SC1343 Ⓒ
Q801	2327802	2SD478 Ⓒ
Q802	2327792	2SB568 Ⓒ
Q803	2327802	2SD478 Ⓒ

DIODES, THYRISTOR & THERMISTOR

for TUNER PRINTED WIRING BOARD

CR151	2337011	1S2076
CR152	0575002	1N34A
CR153	2337011	1S2076
CR154	2337011	1S2076
CR155	2337011	1S2076
CR156	2337011	1S2076
CR201	2337011	1S2076
CR202	2337011	1S2076
CR301	2337011	1S2076
CR302	2337011	1S2076

for MAIN PRINTED WIRING BOARD

CR501	2337011	1S2076
CR502	2337011	1S2076
CR503	2337011	1S2076
CR504	2337011	1S2076
CR505	2337011	1S2076
CR506	2337011	1S2076
CR701(L,R)	2347064	SD - 5L
CR702(L,R)	2347044	MV - 5L
CR703(L,R)	2337011	1S2076
CR704(L,R)	2337011	1S2076
CR705(L,R)	2337011	1S2076
CR706(L,R)	2337011	1S2076
CR707(L,R)	2337011	1S2076
CR708(L,R)	2337011	1S2076
CR801	2337251	ERD 03 - 02
CR802	2337251	ERD 03 - 02
CR803	2337251	ERD 03 - 02
CR804	2337251	ERD 03 - 02
CR805	2337181	HZ - 15
CR806	2337181	HZ - 15
CR807	2337182	HZ - 16
CR808	2337081	W06A
CR809	2337081	W06A
CR810	2337182	HZ - 16
CR811	2337011	1S2076
SCR501	2337091	CW01B
TH701(L,R)	0576031	13D27

for CHASSIS ASSEMBLY

CR001	2337011	1S2076

SYMBOL NO.	STOCK NO.	DESCRIPTION

VARIABLE RESISTORS

for TUNER PRINTED WIRING BOARD

VR201	0151226	100kΩ - (B)
VR202	0151254	100kΩ - (B)
VR301	0151284	300kΩ - (B)
VR302	0151224	10kΩ - (B)
VR303	0151226	100kΩ - (B)

for PRE-TONE PRINTED WIRING BOARD

VR601(L,R)	0156153	50kΩ - (B) (Bass)
VR602(L,R)	0156153	50kΩ - (B) (Treble)
VR603(L,R)	0156181	200kΩ - (B) (Volume)
VR604	0156161	200kΩ (Balance)

for MAIN PRINTED WIRING BOARD

VR701 (L,R)	0151223	200Ω - (B)

COILS & TRANSFORMERS

for TUNER PRINTED WIRING BOARD

L101	2134651	FM ANT coil
L102	2134657	FM RF1 coil
L103	2134658	FM RF2 coil
L104	2227201	Choke coil - 2.2μH
L105	2134471	FM OSC coil
L201	2227119	Choke coil - 18μH
L202	2227081	Choke coil - 1μH
T101	2154293	FM IF transformer
T201	2154271	FM IF transformer
T252	2134445	AM OSC coil
T253	2154181	AM IF transformer

for MAIN PRINTED WIRING BOARD

L701(L,R)	2227142	Audio trap coil - 2.2μH

for CHASSIS ASSEMBLY

L002	2227032	Choke coil - 2.2μH

MISCELLANEOUS

	2505286	Tuner printed wiring board assembly
	2505522	Equalizer printed wiring board assembly
	2505533	Pre-tone printed wiring board assembly
	2505541	Switch printed wiring board assembly
	2505552	Main printed wiring board assembly
	4398541	Lamp cover assembly
VC101-104, VC151, 152	0281181	Variable capacitor
TC104	0283123	Trimmer capacitor
MF201	2134541	Ceramic filter
MF202	2134541	Ceramic filter
MF203	2134541	Ceramic filter
CP401	2134492	Leak filter
RY901	2647061	Reed relay
F001	2727193	Fuse (2A, Time lag)
F002	2727196	Fuse (3.15A)
PL9	2767233	Lamp - indicator lamp (8V, 30mA)
PL10	2337237	LED

(SR-803)

SYMBOL NO.	STOCK NO.	DESCRIPTION
S1a - c	2617601	Switch - rotary switch (Function sw.)
S2a - f	2617591	Switch - rotary switch (Tape select sw.)
S3ab, 4ab,5	2637721	Switch - push switch (Mode, Loudness, FM MUTE sw.)
S6ab, 7ab	2637731	Switch - push switch (Low filter, High filter sw.)
S8ab, 9ab	2637741	Switch - push switch (Speaker sw.)
S10	2637325	Switch - Power switch
S11	2647072	Speaker relay
S12	2787451	Switch - thermal switch
T001	2218151	Power transformer
	2120871	Balun transformer
L001	2134721	Ferrite antenna
	2577294	Signal meter (for France)
	2577295	Signal meter (for West Germany)
	2577242	Tuning meter (for France)
	2577296	Tuning meter (for West Germany)
	2687451	Terminal - 6P terminal
	2687311	Terminal - 6P terminal (Large)
	2687831	Terminal - 5P terminal
	2687361	Terminal - 2P terminal
	2687421	Terminal - 4P screw terminal (for antenna)
	2687701	Terminal - 4P push terminal (for speaker)
	2677201	Jack - headphone jack
	2687591	Jack - 1P US pin jack
	2657291	Socket - DIN socket
	2727181	Holder - fuse holder (for Chassis)
	2727121	Holder - fuse holder (for rear plate)
	2657123	Socket - voltage changing socket
	2657361	Socket - coaxial cable socket
	4567451	Screw - 3 ϕ x 6CT bind screw (silver)
	4567411	Screw - 3 ϕ x 6CT bind screw (yellow)
	4567431	Screw - 3 ϕ x 6CT bind screw (black)
	4568833	Screw - 3 ϕ x 10CT screw
	4567433	Screw - 3 ϕ x 10CT bind screw
	4567449	Screw - 4 ϕ x 30CT bind screw
	4090092	Earth screw
	4387911	Nut (for Power transformer fixing)
	3923401	Indicator
	4684132	Indicator cover
	3913001	Bushing (for ferrite antenna)
	3913001	Bushing (for AC power cord)
	2748511	AC power cord
	4790096	Washer - 3.2 ϕ washer
	4390421	AC socket cover
	4770254	Nut - 3 ϕ flanged nut
	4571921	Flywheel assembly
	4571861	Nut - hexagonal nut
	3920371	Bushing (for Power transistor)

for DIAL MECHANISM ASSEMBLY

3199596	Dial scale (for West Germany)
3199597	Dial scale (for France)
3387111	Dial pointer (for France)
3387112	Dial pointer (for West Germany)
0666704	Dial cord holding fixture
3337201	Spring
3922541	44 ϕ pulley
4394794	Meter panel (for West Germany)
4394795	Meter panel (for France)

for FINAL ASSEMBLY

3243894	Escutcheon (for West Germany)
3243895	Escutcheon (for France)

SYMBOL NO.	STOCK NO.	DESCRIPTION
	3282804	Knob - push knob (Mode, Loudness, others) (for West Germany)
	3284451	Knob - push knob (Mode, Loudness, others) (for France)
	3282397	Knob - push knob (Power sw.) (for West Germany)
	3282398	Knob - push knob (Power sw.) (for France)
	3284203	Knob - Tuning knob (for France)
	3284204	Knob - Tuning knob (for West Germany)
	3284041	Knob (Bass, Treble, others) (for France)
	3284042	Knob (Bass, Treble, others) (for West Germany)
	3284021	Knob (Volume, Function) (for France)
	3284023	Knob (Volume, Function) (for West Germany)
	4743422	Ring - Bass, Treble, Balance knob
	4743423	Ring - Function, Volume knob
	3916411	Leg
	4567413	3 ϕ x 10CT bind screw
	4567411	3 ϕ x 6CT bind screw
	4567446	4 ϕ x 16CT bind screw
	3710471	Headphone cap (for West Germany)

for CABINET ASSEMBLY

9403049	Cabinet assembly

for ACCESSORY

2748371	FM antenna

(SR-703)

SYMBOL NO.	STOCK NO.	DESCRIPTION		
CAPACITORS				
for TUNER PRINTED WIRING BOARD				
C151	0275011	Mylar, film	0.01μF ±10%	50V
C152	0248496	Ceramic, discal	18pF ±5%	50V
C153	0228322	Styrol	300pF ±5%	50V
C154	0275013	Mylar, film	0.022μF ±10%	50V
C155	0275011	Mylar, film	0.01μF ±10%	50V
C156	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C157	0252521	Electrolytic	10μF	16V
C158	0275011	Mylar, film	0.01μF ±10%	50V
C159	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C161	1275214	Mylar, film	0.033μF ±5%	50V
C162	0275016	Mylar, film	0.068μF ±10%	50V
C163	0274315	Mylar, film	0.0047μF ±10%	50V
C164	0252525	Electrolytic	47μF	16V
C165	0252811	Electrolytic	1μF	50V
C166	0248684	Ceramic, discal	100pF ±5%	50V
C167	0252811	Electrolytic	1μF	50V
C168	0252532	Electrolytic	220μF	16V
C169	0274033	Mylar, film	0.0027μF ±10%	50V
C201	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C202	0244175	Ceramic, discal	0.047μF +80 −20%	25V
C204	0244175	Ceramic, discal	0.047μF +80 −20%	25V
C205	0244175	Ceramic, discal	0.047μF +80 −20%	25V
C207	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C208	0252813	Electrolytic	3.3μF	50V
C209	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C210	0252811	Electrolytic	1μF	50V
C211	0244175	Ceramic, discal	0.047μF +80 −20%	25V
C212	0244175	Ceramic, discal	0.047μF +80 −20%	25V
C213	0244175	Ceramic, discal	0.047μF +80 −20%	25V
C214	0252811	Electrolytic	1μF	50V
C215	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C216	0248676	Ceramic, discal	47pF ±5%	50V
C217	0252521	Electrolytic	10μF	16V
C218	0244175	Ceramic, discal	0.047μF +80 −20%	25V
C219	0252521	Electrolytic	10μF	16V
C220	0252811	Electrolytic	1μF	50V
C221	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C222	0252525	Electrolytic	47μF	16V
C223	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C224	0275013	Mylar, film	0.022μF ±10%	50V
C226	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C227	0248690	Ceramic, discal	180pF ±5%	50V
C228	0245018	Ceramic, discal	0.022μF +80 −20%	25V
C301	0252521	Electrolytic	10μF	16V
C302	0275015	Mylar, film	0.047μF	50V
C303	0252813	Electrolytic	3.3μF	50V
C304	0252877	Electrolytic	1μF	50V
C305	0252875	Electrolytic	0.47μF	50V
C306	0221523	Styrol	360pF ±5%	50V
C307(L,R)	0252521	Electrolytic	10μF	16V
C308(L,R)	1274211	Mylar, film	1,000pF ±5%	50V
C309(L,R)	0252811	Electrolytic	1μF	50V
C310	0252532	Electrolytic	220μF	16V
C401(L,R)	0252811	Electrolytic	1μF	50V
C402(L,R)	0248684	Ceramic, discal	100pF ±5%	50V
C403(L,R)	0252225	Electrolytic	47μF	6.3V
C404(L,R)	0248732	Ceramic, discal	220pF ±10%	50V
C405(L,R)	0274013	Mylar, film	0.0022μF ±10%	50V
C406(L,R)	0274036	Mylar, film	0.0082μF ±10%	50V
C407(L,R)	0274011	Mylar, film	1000pF ±10%	50V
C408(L,R)	0257145	Electrolytic	10μF	16V
C409(L,R)	0252811	Electrolytic	1μF	50V
C410(L,R)	0257145	Electrolytic	10μF	16V
for AUDIO PRINTED WIRING BOARD				
C501	0257183	Electrolytic	3.3μF	50V
C502	0252231	Electrolytic	100μF	6.3V
C503	0252525	Electrolytic	47μF	16V
C504	0252811	Electrolytic	1μF	50V
C601(L,R)	0228315	Styrol	150pF ±5%	50V
C602(L,R)	0275014	Mylar, film	0.033μF ±10%	50V
C603(L,R)	0274013	Mylar, film	0.0022μF ±10%	50V
C604(L,R)	0248722	Styrol	82pF ±10%	50V
C701(L,R)	0252811	Electrolytic	1μF	50V
C702(L,R)	0252225	Electrolytic	47μF	6.3V
C703(L,R)	0257183	Electrolytic	3.3μF	50V
C704(L,R)	0248650	Ceramic, discal	10pF ±5pF	50V
C705(L,R)	0248650	Ceramic, discal	10pF ±5pF	50V
C706(L,R)	0248674	Ceramic, discal	39pF ±5%	50V
C707(L,R)	0248684	Ceramic, discal	100pF ±5%	50V
C709(L,R)	0275011	Mylar, film	0.01μF ±10%	50V
C710(L,R)	0275011	Myalr, film	0.01μF ±10%	50V
C711(L,R)	0276013	Myalr, film	0.22μF ±10%	50V
C712(L,R)	1275234	Mylar, film	0.039μF ±5%	50V
C713(L,R)	1276213	Mylar, film	0.22μF ±5%	50V
C714(L,R)	1274245	Mylar, film	0.0062μF ±5%	50V
C715(L,R)	1275233	Mylar, film	0.027μF ±5%	50V
C717(L,R)	1275233	Mylar, film	0.027μF ±5%	50V
C720(L,R)	0274011	Mylar, film	1000pF ±10%	50V
C721(L,R)	0248664	Ceramic, discal	15pF ±5%	50V
C722(L,R)	0275011	Mylar, film	0.01μF ±10%	50V
C723(L,R)	0275011	Mylar, film	0.01μF ±10%	50V
C725(L,R)	0274011	Mylar, film	1000pF ±10%	50V
C801	0245408	Ceramic, discal	0.01μF ±20%	500V
C802	0245408	Ceramic, discal	0.01μF ±20%	500V
C803	0245408	Ceramic, discal	0.01μF ±20%	500V
C804	0245408	Ceramic, discal	0.01μF ±20%	500V
C805	0250228	Electrolytic	3300μF	50V
C806	0250228	Electrolytic	3300μF	50V
C807	0250228	Electrolytic	3300μF	50V
C808	0250228	Electrolytic	3300μF	50V
C809	0275011	Mylar, film	0.01μF ±10%	50V
C810	0275011	Mylar, film	0.01μF ±10%	50V
C811	0252632	Electrolytic	220μF	25V
C812	0252632	Electrolytic	220μF	25V
C813	0252633	Electrolytic	330μF	25V
C814	0252633	Electrolytic	330μF	25V
C003	0214481	Paper	0.01μF ±20%	400V
C004	0252225	Electrolytic	47μF	6.3V
C005	0279956	Mylar, film	0.22μF ±10%	100V
C006	0279956	Mylar, film	0.22μF ±10%	100V
C007	0214481	Paper	0.01μF ±20%	400V
C008	0214481	Paper	0.01μF ±20%	400V
RESISTORS				
for TUNER PRINTED WIRING BOARD				
R151	0138129	Carbon film	2.2kΩ ±5%	SRD¼SD

(SR-703)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R152	0138057	Carbon film	47Ω	±5%	SRD¼SD
R153	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R154	0138201	Carbon film	100kΩ	±5%	SRD¼SD
R155	0114261	Carbon film	1kΩ	±5%	SRD¼P
R156	0138169	Carbon film	33kΩ	±5%	SRD¼SD
R157	0138129	Carbon film	2.2kΩ	±5%	SRD¼SD
R158	0114057	Carbon film	47Ω	±5%	SRD¼P
R159	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R161	0138081	Carbon film	100Ω	±5%	SRD¼SD
R163	0138213	Carbon film	330kΩ	±5%	SRD¼SD
R164	0138179	Carbon film	56kΩ	±5%	SRD¼SD
R165	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R166	0138125	Carbon film	1.5kΩ	±5%	SRD¼SD
R167	0138201	Carbon film	100kΩ	±5%	SRD¼SD
R168	0138121	Carbon film	1kΩ	±5%	SRD¼SD
R169	0138123	Carbon film	1.2kΩ	±5%	SRD¼SD
R170	0138143	Carbon film	8.2kΩ	±5%	SRD¼SD
R171	0138137	Carbon film	4.7kΩ	±5%	SRD¼SD
R201	0114131	Carbon film	100Ω	±5%	SRD¼P
R202	0114147	Carbon film	470Ω	±5%	SRD¼P
R203	0114167	Carbon film	1.8kΩ	±5%	SRD¼P
R205	0114201	Carbon film	10kΩ	±5%	SRD¼P
R206	0114147	Carbon film	470Ω	±5%	SRD¼P
R207	0114149	Carbon film	560Ω	±5%	SRD¼P
R208	0114285	Carbon film	150kΩ	±5%	SRD¼P
R209	0114145	Carbon film	390Ω	±5%	SRD¼P
R211	0114139	Carbon film	220Ω	±5%	SRD¼P
R212	0114203	Carbon film	12kΩ	±5%	SRD¼P
R213	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R214	0114217	Carbon film	47kΩ	±5%	SRD¼P
R215	0114169	Carbon film	2.2kΩ	±5%	SRD¼P
R216	0114179	Carbon film	5.6kΩ	±5%	SRD¼P
R217	0114141	Carbon film	270Ω	±5%	SRD¼P
R218	0114201	Carbon film	10kΩ	±5%	SRD¼P
R219	0114141	Carbon film	270Ω	±5%	SRD¼P
R220	0114209	Carbon film	22kΩ	±5%	SRD¼P
R221	0114209	Carbon film	22kΩ	±5%	SRD¼P
R222	0114289	Carbon film	220kΩ	±5%	SRD¼P
R223	0114283	Carbon film	120kΩ	±5%	SRD¼P
R225	0110609	Metal	47Ω	±5%	RN¼B
R226	0114145	Carbon film	390Ω	±5%	SRD¼P
R301	0114161	Carbon film	1kΩ	±5%	SRD¼P
R302	0110820	Metal	24kΩ	±5%	RN¼B
R304(L,R)	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R305(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R306(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R309	0110621	Metal	100Ω	±5%	RN¼B
R311	0114201	Carbon film	10kΩ	±5%	SRD¼P
R312	0114201	Carbon film	10kΩ	±5%	SRD¼P
R313(L,R)	0114183	Carbon film	8.2kΩ	±5%	SRD¼P
R401(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R402(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R403(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R404(L,R)	0114147	Carbon film	470Ω	±5%	SRD¼P
R405(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R406(L,R)	0114213	Carbon film	33kΩ	±5%	SRD¼P
R407(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R408(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R409(L,R)	0114139	Carbon film	220Ω	±5%	SRD¼P
R410(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R411(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R412(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R413(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R414(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R415(L,R)	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R416(L,R)	0114293	Carbon film	330kΩ	±5%	SRD¼P
R417(L,R)	0114161	Carbon film	1kΩ	±5%	SRD¼P
R418(L,R)	0114295	Carbon film	390kΩ	±5%	SRD¼P
R419(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R420(L,R)	0114215	Carbon film	39kΩ	±5%	SRD¼P

for AUDIO PRINTED WIRING BOARD

R228	0114285	Carbon film	150kΩ	±5%	SRD¼P
R501(L,R)	0134381	Composition	4.7kΩ	±10%	RC½GF
R502(L,R)	0114139	Carbon film	220Ω	±5%	SRD¼P
R503(L,R)	0134383	Composition	6.8kΩ	±10%	RC½GF
R504(L,R)	0114061	Carbon film	68Ω	±5%	SRD¼P
R505(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R506(L,R)	0114297	Carbon film	470kΩ	±5%	SRD¼P
R507	0114203	Carbon film	12kΩ	±5%	SRD¼P
R508	0114205	Carbon film	15kΩ	±5%	SRD¼P
R509	0114131	Carbon film	100Ω	±5%	SRD¼P
R510	0114285	Carbon film	150kΩ	±5%	SRD¼P
R511	0114205	Carbon film	15kΩ	±5%	SRD¼P
R512	0138171	Carbon film	27kΩ	±5%	SRD¼SD
R513	0114209	Carbon film	22kΩ	±5%	SRD¼P
R514	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R515	0134383	Composition	6.8kΩ	±10%	RC½GF
R516	0114161	Carbon film	1kΩ	±5%	SRD¼P
R517	0114181	Carbon film	6.8kΩ	±5%	SRD¼P
R518	0114205	Carbon film	15kΩ	±5%	SRD¼P
R519	0134371	Composition	680Ω	±10%	RC½GF
R520	0138131	Carbon film	2.7kΩ	±5%	SRD¼SD
R601(L,R)	0114283	Carbon film	120kΩ	±5%	SRD¼P
R602(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R603(L,R)	0114203	Carbon film	12kΩ	±5%	SRD¼P
R701(L,R)	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R702(L,R)	0114281	Carbon film	100kΩ	±5%	SRD¼P
R703(L,R)	0114165	Carbon film	1.5kΩ	±5%	SRD¼P
R704(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R705(L,R)	0114217	Carbon film	47kΩ	±5%	SRD¼P
R707(L,R)	0114289	Carbon film	220kΩ	±5%	SRD¼P
R708(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R709(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R710(L,R)	0114053	Carbon film	33Ω	±5%	SRD¼P
R711(L,R)	0134048	Composition	200Ω	±5%	RC½GF
R713(L,R)	0119041	Metal	10Ω	±10%	RN1B
R714(L,R)	0119041	Metal	10Ω	±10%	RN1B
R715(L,R)	0134365	Composition	220Ω	±10%	RC½GF
R716(L,R)	0134365	Composition	220Ω	±10%	RC½GF
R719(L,R)	0119237	Metal	0.47Ω	±10%	RN3B
R720(L,R)	0119237	Metal	0.47Ω	±10%	RN3B
R721(L,R)	0119041	Metal	10Ω	±10%	RN1B
R722(L,R)	0119139	Metal	4.7Ω	±10%	RN2B
R723(L,R)	0114209	Carbon film	22kΩ	±5%	SRD¼P
R724(L,R)	0114153	Carbon film	820Ω	±5%	SRD¼P
R725(L,R)	0114201	Carbon film	10kΩ	±5%	SRD¼P
R726(L,R)	0114165	Carbon film	1.5kΩ	±5%	SRD¼P

(SR-703)

SYMBOL NO.	STOCK NO.	DESCRIPTION			
R727(L,R)	0114173	Carbon film	3.3kΩ	±5%	SRD¼P
R728(L,R)	0114147	Carbon film	470Ω	±5%	SRD¼P
R729(L,R)	0119526	Metal, oxide	270Ω	±10%	RD2PA
R730(L,R)	0119139	Metal	4.7Ω	±10%	RN2B
R801	0119411	Metal, oxide	68Ω	±10%	SRD¼P
R802	0119411	Metal, oxide	68Ω	±10%	SRD¼P
R803	0134377	Composition	2.2kΩ	±10%	RC½GF
R804	0134377	Composition	2.2kΩ	±10%	RC½GF
for CHASSIS ASSEMBLY					
R003	0134363	Composition	150Ω	±10%	RC½GF

ICs & TRANSISTORS

for TUNER PRINTED WIRING BOARD

IC151	2367131	HA1151
IC201	2367122	HA1137
IC301	2367271	HA1196
IC401	2367152	HA1452W
Q151	2327443	2SC1344 Ⓔ
Q201	0573486	2SC460 Ⓑ
Q202	2327443	2SC1344 Ⓔ
Q401(L,R)	2327443	2SC1344 Ⓔ

for AUDIO PRINTED WIRING BOARD

IC701	2367152	HA1452W
Q501(L,R)	2327743	2SA836 Ⓔ
Q502	2327443	2SC1344 Ⓔ
Q503	2327743	2SA836 Ⓔ
Q504	2327333	2SC1213 Ⓒ
Q505	2327443	2SC1344 Ⓔ
Q506	2320063	2SC458 Ⓒ
Q701(L,R)	2327802	2SD478 Ⓒ
Q702(L,R)	2327792	2SB568 Ⓒ
Q703(L,R)	2327622	2SA753 Ⓑ
Q704(L,R)	2327612	2SC1343 Ⓑ
Q801	2327802	2SD478 Ⓒ
Q802	2327792	2SB568 Ⓒ

DIODES, THYRISTOR & THERMISTORS

for TUNER PRINTED WIRING BOARD

CR151	2337011	1S2076
CR152	2337011	1S2076
CR153	0575002	1N34A
CR201	2337011	1S2076
CR203	2337011	1S2076
CR204	2337011	1S2076
CR301	2337011	1S2076
CR302	2337011	1S2076

for AUDIO PRINTED WIRING BOARD

CR501(L,R)	2337011	1S2076
CR502	2337011	1S2076
CR503	2337011	1S2076
CR504	2337011	1S2076
CR505	2337011	1S2076
CR701(L,R)	2347041	MV - 5
CR702(L,R)	2347041	MV - 5
CR703(L,R)	2337011	1S2076
CR704(L,R)	2337011	1S2076
CR705(L,R)	2337011	1S2076
CR706(L,R)	2337011	1S2076
CR707(L,R)	2337011	1S2076
CR801	2337251	ERD 03 - 02
CR802	2337251	ERD 03 - 02
CR803	2337251	ERD 03 - 02
CR804	2337251	ERD 03 - 02
CR805	2337181	HZ - 15
CR806	2337181	HZ - 15
CR809	2337081	W06A
CR810	2337081	W06A
CR811	2337011	1S2076
CR812	2337011	1S2076
SCR501	2337091	Thyristor CW01B
TH701 (L,R)	0576031	Thermistor 13D27

for CHASSIS ASSEMBLY

CR001	2327733	HZ - 7 Ⓒ

VARIABLE RESISTORS

for TUNER PRINTED WIRING BOARD

VR201	0151226	100kΩ - (B)
VR202	0151284	300kΩ - (B)
VR301	0151226	100kΩ - (B)
VR302	0151271	6.8kΩ - (B)
VR303	0151284	300kΩ - (B)

for AUDIO PRINTED WIRING BOARD

VR601(L,R)	0156181	200kΩ - (B) (Volume)
VR602	0156161	200kΩ - (W) (Balance)
VR701(L,R)	0156171	50kΩ - (C) (BASS)
VR702(L,R)	0156171	50kΩ - (C) (TREBLE)
VR703(L,R)	0151223	200Ω - (B)

COILS & TRANSFORMERS

for TUNER PRINTED WIRING BOARD

L151	2134431	AM OSC coil
L201	2227119	Choke coil (18μH)
L202	2227081	Choke coil (1μH)
L203	2227035	Choke coil (27μH)
T151	2154281	AM IF transformer
T152	2154182	AM IF transformer

(SR-703)

SYMBOL NO.	STOCK NO.	DESCRIPTION
T201	2154271	FM IF transformer
		for AUDIO PRINTED WIRING BOARD
L701(L,R)	2227142	Audio trap coil (2.2μH)
		for CHASSIS ASSEMBLY
L002	2227032	Choke coil (2.2μH)
		MISCELLANEOUS
	2505792	Tuner printed wiring board assembly
	2505815	Audio (A) printed wiring board assembly
	2505813	Audio (B) printed wiring board assembly
	2505801	Switch printed wiring board assembly
	4398541	Lamp cover assembly
	2425024	Tuner pack (Front end)
MF201	2134541	Ceramic filter
MF202	2134541	Ceramic filter
CP301(L,R)	0186051	Leak filter
F001	2727192	Fuse (1.25A)
F002	2727196	Fuse - wired in fuse (3.15A)
PL9	2767236	Lamp - indicator lamp (8V, 30mA)
PL10	2337238	LED
S1	2617601	Switch - rotary switch (for function sw.)
S2	2637831	Switch - push switch (for tape monitor - 1 sw.)
S3	2637831	Switch - push switch (for tape monitor - 2 sw.)
S4	2637731	Switch - push switch (for loudness sw.)
S5	2637821	Switch - push switch (for high filter sw.)
S6	2637731	Switch - push switch (for mode sw.)
S7	2637831	Switch - push switch (for muting sw.)
S8	2637741	Switch - push switch (for A speaker sw.)
S9	2637741	Switch - push switch (for B speaker sw.)
S10	2647072	Speaker relay
S11	2637325	Switch - power switch
	2218251	Power transformer
L001	2134722	Ferrite antenna
	2577294	Signal meter (for U.K., France & Switzerland)
	2577295	Signal meter (for West Germany & Australia)
	2577296	Tuning meter (for U.K., France & Switzerland)
	2577296	Tuning meter (for West Germany& Australia)
	2687652	Terminal - 3P screw terminal (for antenna)
	2687661	Terminal - 8P screw terminal (for speaker)
	2687831	Terminal - 5P terminal
	2687311	Terminal - 6P terminal
	2687451	Terminal - 6P terminal
	2677201	Jack - headphone jack
	2727121	Holder - fuse holder
	2727181	Holder - fuse holder
	2748621	AC power cord (for U.K.)
	2748511	AC power cord (for France& West Germany)
	2747771	AC power cord (for Switzerland)
	2747301	AC power cord (for Australia)
	2787221	Belt (for AC power cord) (for Australia)
	4387911	Nut (for power transformer fixing)
	4790096	Washer
	4567411	3 φ x 6CT bind screw (yellow)
	4567431	3 φ x 6CT bind screw (black)
	4567421	4 φ x 6CT bind screw
	4567449	4 φ x 30CT bind screw
	4513311	Earth screw
	3715183	Bushing (for AC power cord) (for U.K.)
	3715184	Bushing (for AC power cord) (for Australia)
	3913001	Bushing (for AC power cord) (for France, Switzerland & West Germany)
	3913006	Bushing (for ferrite antenna)

SYMBOL NO.	STOCK NO.	DESCRIPTION
	3920381	AC socket cover
	2657361	Socket-Coaxial cable socket
	2657291	Socket - DIN socket
	2687591	Jack - 1P US pin jack
	2657123	Socket-Voltage changing socket
	3920731	Bushing (for power transistor)
		for DIAL MECHANISM ASSEMBLY
	3199666	Dial scale (for West Germany & Australia)
	3199667	Dial scale (for U.K., France & Switzerland)
	3387111	Dial pointer (for U.K., France & Switzerland)
	3387112	Dial pointer (for West Germany & Australia)
	0666704	Dial cord holding fixture
	3337201	Spring
	4571921	Flywheel assembly
	3922541	Pulley
	3923401	Indicator
	4684132	Indicator cover
	4394794	Meter panel (for West Germany & Australia)
	4394795	Meter panel (for U.K., France & Switzerland)
		for FINAL ASSEMBLY
	3244153	Escutcheon assembly (for West Germany & Australia)
	3244154	Escutcheon assembly (for U.K., France & Switzerland)
	3282397	Knob - Power knob (for West Germany & Australia)
	3282398	Knob - Power knob (for U.K., France & Switzerland)
	3282804	Knob - Speaker, High filter knob, others (for West Germany & Australia)
	3284451	Knob - Speaker, High filter knob, others (for U.K., France & Switzerland)
	3284203	Knob - Tuning knob (for U.K., France & Switzerland)
	3284204	Knob - Tuning knob (for West Germany & Australia)
	3284041	Knob - Bass, Treble, Balance knob (for U.K., France & Switzerland)
	3284042	Knob - Bass, Treble, Balance knob (for West Germany & Australia)
	3284021	Knob - Volume, Function knob (for U.K., France & Switzerland)
	3284023	Knob - Volume, Function knob (for West Germany & Australia)
	4743422	Ring - Bass, Treble, Balance knob
	4743423	Ring - Volume, Function knob
	3916411	Leg
	4567413	3 φ x 10CT bind screw
	4567446	4 φ x 16CT bind screw
	4567411	3 φ x 6CT bind screw
	0645587	Washer
	3710471	Head phone cap (for West Germany & Australia)
		for CABIENT ASSEMBLY
	9403649	Cabinet assembly (for France, Switzerland, West Germany & Australia)
	9403057	Cabinet assembly (for U.K.)
		for ACCESSORY
	2748371	FM antenna

FRONT AND PEAR PANEL·VORDERE UND HINTERE BEDIENUNGS-TAFEL·PANNEAUX AVANT ET ARRIERE

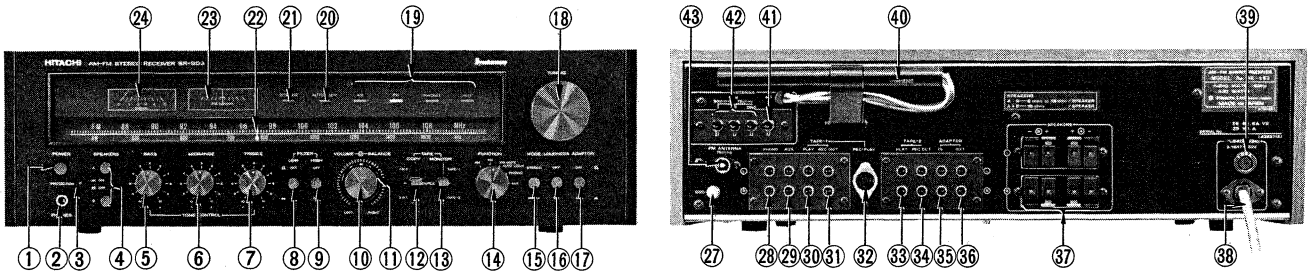

SR-903 (Black type)

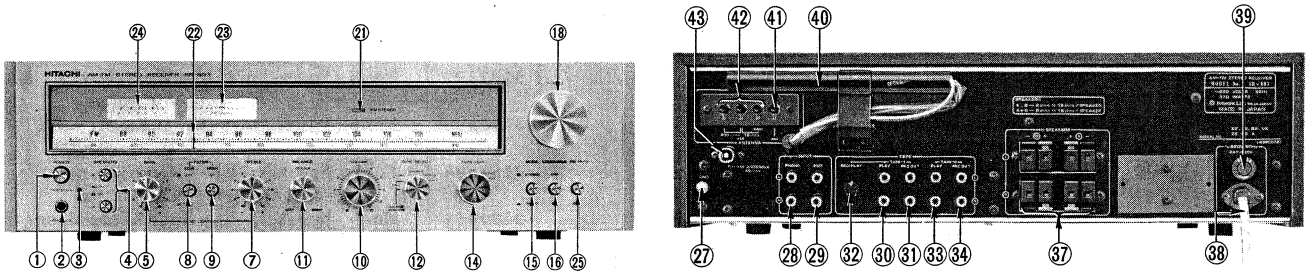

SR-803 (Gold type)

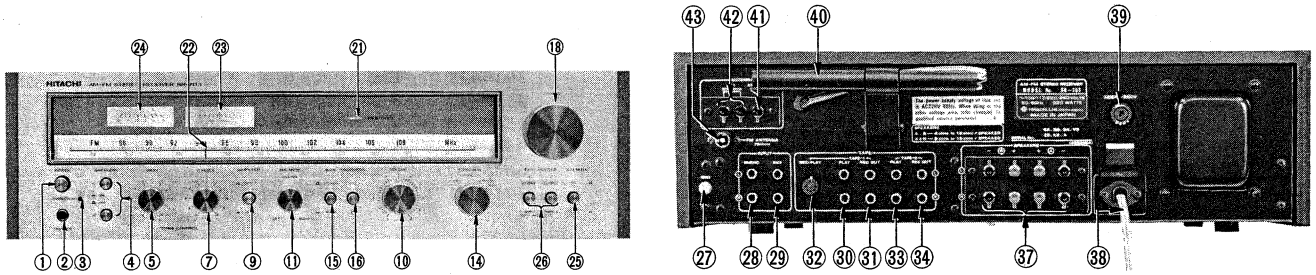

SR-703 (Gold type)

① POWER switch
② Headphone jack (PHONES)
③ PROTECTION indicator
④ SPEAKER switches (A, B)
⑤ BASS control
⑥ MIDRANGE control
⑦ TREBLE control
⑧ LOW FILTER siwtch
⑨ HIGH FILTER siwtch
⑩ VOLUME contorl
⑪ BALANCE control
⑫ YAPE COPY switch
⑬ TAPE MONITOR siwtch
⑭ FUNCTION switch
⑮ MODE switch
⑯ LOUDNESS siwtch
⑰ ADAPTOR switch
⑱ TUNING knob
⑲ Program source indicators
⑳ FM AUTO LOCK indicator
㉑ FM STEREO indicator
㉒ Dial pointer
㉓ TUNING meter
㉔ SIGNAL meter
㉕ FM MUTE switch
㉖ TAPE MONITOR switches
㉗ Ground terminal (GND)
㉘ PHONO input terminals
㉙ AUX input terminals
㉚ TAPE-1 PLAY terminals
㉛ TAPE-1 REC OUT terminals
㉜ TAPE-1 DIN REC/PLAY socket
㉝ TAPE-2 PLAY terminals
㉞ TAPE-2 REC OUT terminals
㉟ ADAPTOR IN terminals
㊱ ADAPTOR OUT terminals
㊲ SPEAKER terminals
㊳ Power supply cord
㊴ FUSE
㊵ AM bar antenna
㊶ AM ANTENNA terminal
㊷ FM ANTENNA terminal
㊸ FM ANTENNA socket (75 ohms)

① Netzschalter
② Kopfhörer-Buchse
③ Schutzschaltung-Anzeigeleuchte
④ Lautsprecherschalter
⑤ BASS-Regler
⑥ Mittenfrequenzregler (SR-903)
⑦ Höhenregler
⑧ Tiefenfilter-Schalter
⑨ Höhenfilter-Schalter
⑩ Lautstärkeregler
⑪ BALANCE-Regler
⑫ Tonband-Kopierschalter
⑬ Schalter für Hinterbandkontrolle
⑭ Functionsschalter
⑮ Stereo/Mono-Schalter
⑯ Schalter für gehörrichtige Lautstärkekontur
⑰ Adapterschalter
⑱ Abstimmknopf
⑲ Programmquellen-Anzeigen
⑳ UKW-Scharfabstimmanzeige
㉑ UKW-Stereo-Anzeige
㉒ Skalenzeiger
㉓ Abstimmanzeige
㉔ Feldstärke-Meßinstrument
㉕ UKW-Stillabstimmschalter
㉖ Schalter für Hinterbandkontrolle
㉗ Erdung
㉘ Plattenspieler-Eingangsklemmen
㉙ Eingangsklemmen f. ext. Schallquellen
㉚ Eingang für Tonbandgerät 1
㉛ Ausgang für Tonbandgerät 1
㉜ DIN-Normbuchse
㉝ Eingang für Tonbandgerät 2
㉞ Ausgang für Tonbandgerät 2
㉟ Dolby-Adapter-Eingangsklemmen
㊱ Dolby-Adapter-Ausgangsklemmen
㊲ Lautsprecher-Klemmen
㊳ Netzkabel
㊴ Sicherung
㊵ MW-Ferritstabantenne
㊶ MW-Antennenbuchse
㊷ UKW-Antennenbuchse
㊸ UKW-Antennenbuchse (75 Ohm)

① Interrupteur secteur
② Casque stéréophonique
③ Lampe de PROTECTION
④ Interrupteur de haut-parleurs (A, B)
⑤ Commande de grave
⑥ Commande de fréquence moyenne (SR-903)
⑦ Commande d'aigu
⑧ Commutateur de filtre passe-bas
⑨ Commutateur de filtre passe-haut
⑩ Commnade de VOLUME
⑪ Commande d'équilibrage
⑫ Commutateur de copiage de bande
⑬ Commutateur de contrôle de bande
⑭ Commutateur de fonction
⑮ Commutateur de MODE
⑯ Correcteur physiologique
⑰ Commutateur d'adaptateur
⑱ Bouton d'accord
⑲ Indicateurs de source de programme
⑳ Indicateur de verrouillage automatique de fréquence
㉑ Indicateur STEREO
㉒ Aiguille de cadran
㉓ Indicateur de syntonisation
㉔ Indicateur de l'intensité du SIGNAL
㉕ Commutateur de sourdine FM
㉖ Commutateurs de contrôle de bande
㉗ Prise de terre
㉘ Bornes d'entrée PHONO
㉙ Bornes d'entrée auxiliaires
㉚ Bornes de reproduction de bande 1
㉛ Bornes d'enregistrement de bande 1
㉜ Prise DIN de bande 1
㉝ Borne de reproduction de bande 2
㉞ Borne d'enregistrement de bande 2
㉟ Bornes d'entrée d'adaptateur
㊱ Bornes de sortie d'adaptateur
㊲ Borne de haut-lar,eurs
㊳ Cordon d'alimentation C. A.
㊴ Fusible
㊵ Antenne de ferrite AM
㊶ Borne d'antenne AM
㊷ Borne d'antenne FM
㊸ Prise d'antenne FM (75 ohms)